

TS SERIES

MODEL

TS4-560

The TS4-560 is a compact 6-axis robot built for high-speed, high-precision operations in the 3C industry. Standard cycle time under 0.33 s, IP67 wrist protection and floor/wall/ceiling mounting let it drop into tight cells for assembly, screwing, handling and inspection. It ships pre-integrated with our own inCube20 controller.

6-Axis

Payload 4 kg · Reach 560 mm

Repeatability

±0.02 mm positional accuracy

Texsonics RC

In-house controller, drives and teach pendant

Site-ready

Floor / Wall / Ceiling mount, factory calibrated

01 SPECIFICATIONS

MECHANICAL

AXES	6
PAYLOAD	4 kg
MAX REACH	560 mm
REPEATABILITY	±0.02 mm
ROBOT WEIGHT	≈ 23 kg

ENVIRONMENT / CONTROL

STANDARD CYCLE TIME	< 0.33 s
MOUNTING	Floor / Wall / Ceiling
PROTECTION	IP65 (IP67 optional)
CONTROLLER	inCube20 (in-house)

02

OVERVIEW

ENGINEERED FOR THE FACTORY FLOOR.

The TS4-560 is a 6-axis industrial robot built for 3C Assembly & Testing and related production work. Factory-calibrated, floor or ceiling mount, and pre-integrated with the Texsonics RC series controller and teach pendant.

01

HIGH-CYCLE MOTION

Repeatability ± 0.02 mm across a 560 mm envelope — dependable for line-rate production.

02

INTEGRATED STACK

Ships with the Texsonics RC controller, safety I/O, teach pendant and offline programming environment — no third-party integration needed.


03

LOCAL SUPPORT

Engineered and assembled in Coimbatore. Field service and spares within India — no import lead times.

03

PRODUCT

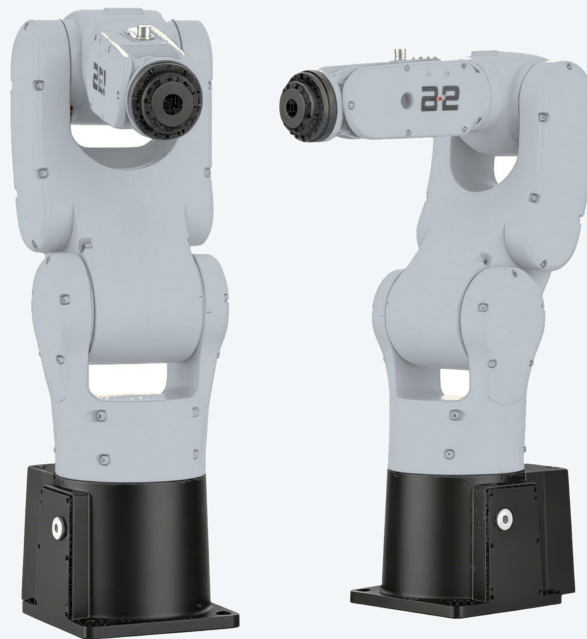

TS4-560 • TS SERIES

04 WORKING RANGE

MOTION — GROUP A

J1 — BASE ROTATION	—170° ... +170°
J2 — SHOULDER	—110° ... +120°
J3 — ELBOW	—108° ... +152°

MOTION — GROUP B

J4 — WRIST ROLL	—200° ... +200°
J5 — WRIST PITCH	—118° ... +118°
J6 — TOOL ROTATION	—350° ... +350°

05 CONTROL & INTEGRATION

CONTROLLER

Texsonics RC series
in-house motion controller,
dual-kernel real-time OS

TEACH PENDANT

11.5" touch tablet
drag-teaching, Wi-Fi,
on-device offline
programming

FIELDBUS

**EtherCAT / Modbus
TCP**
industrial fieldbus,
dual-protocol support


SOFTWARE

TEXCAM offline CAM
toolpath generation, digital
twin simulation, vision

06

APPLICATIONS

Deployable across the primary applications the TS4-560 was engineered for — full production-line integration with the Texsonics control stack.

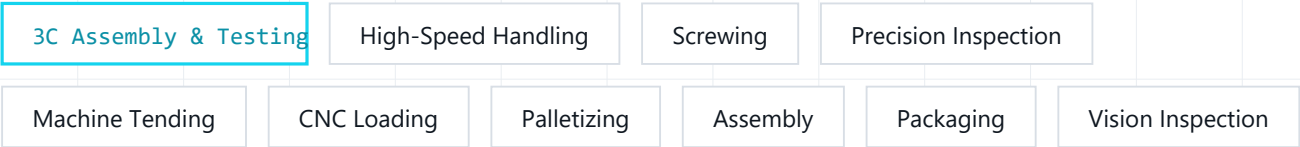

07

BUILT FOR THE OPERATOR

- | | |
|----------------------------|---------------------------|
| ■ Live 3D position display | ■ I/O monitor |
| ■ Online command execution | ■ Error diagnostics |
| ■ Position editor | ■ Dynamic teach-in |
| ■ Variable monitor | ■ Digital twin simulation |

SPECIFICATIONS AND VISUALS MAY CHANGE WITHOUT NOTICE AS PART OF ONGOING PRODUCT IMPROVEMENTS. IMAGES ARE FOR REFERENCE ONLY.
UNAUTHORIZED REPRODUCTION OF THIS CATALOGUE IS PROHIBITED WITHOUT WRITTEN PERMISSION FROM TEXSONICS SYSTEMS INDIA PRIVATE LIMITED.

TS4-560

Texsonics Systems India Private Limited
1/6-1, Keerakaran Thottam, Keeranatham, Coimbatore 641035 · Ph: +91 94426 24304

TS SERIES
6-AXIS · PAYLOAD 4 kg · REACH 560 mm

dharmar@texsonics.net · www.texsonics.net