

Datasheet revision 1.1

www.Proto-Advantage.com


0.1" 40 pin Right Angle Male Header Through Hole Gold

DIMENSIONS						
REF.	mm			inches		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
С		1.02				
C1		0.64				
Е		2.54			0.100	
Н		2.54				
H1		6.00				
H2		1.20				
L1		99.06			3.900	
L2		101.60			4.000	
W1		3.00				
W2		2.50				

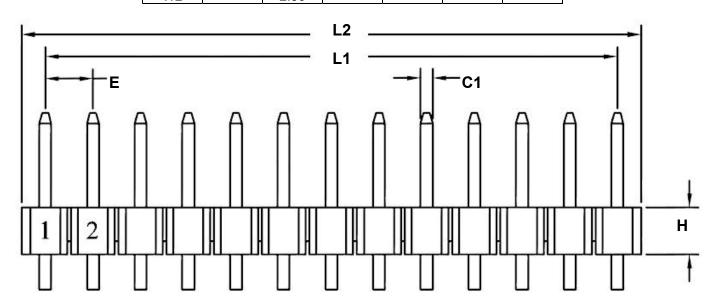



Recommended PCB Hole Layout



SPECIFICATIONS

Plastic body construction: PA6T plastic (320°C melting point)
Pin construction: Gold plated (brass pin, with 1um gold over 50um nickel)
Operating temperature range: -40°C to +130°C
Reflow maximum temperature: +260°C