This is based on the official Raspberry Pi spec to be able to call an extension board a HAT.
https://github.com/raspberrypi/hats/blob/master/designguide.md

40-Pin HAT Connector

HAT EEPROM

EEPROM WRITE ENABLE

Pullup Resistors

These are just pullup resistors for the I2C bus on the EEPROM.
The resistor values are per the HAT spec.

Mounting Holes

H1 3mm_Mounting_Hole
H2 3mm_Mounting_Hole
H3 3mm_Mounting_Hole
H4 3mm_Mounting_Hole

Sheet: /
File: RPi_V24.sch
Title: RPI V.24
Size: A3   Date: 2021-09-07   Rev: A
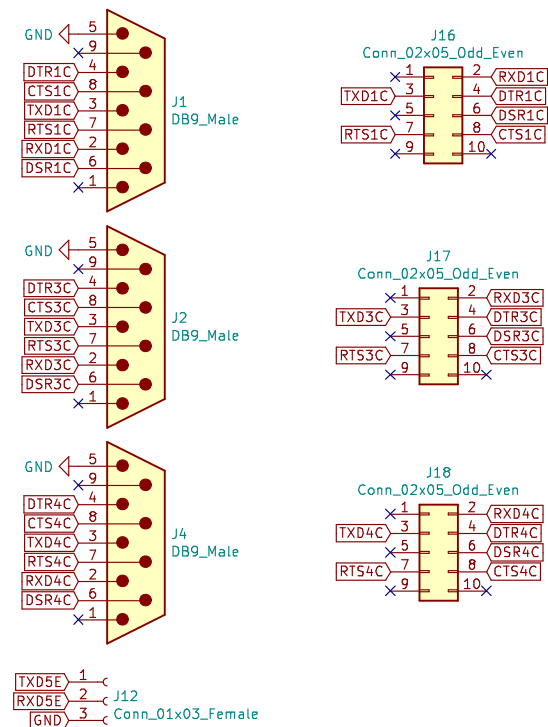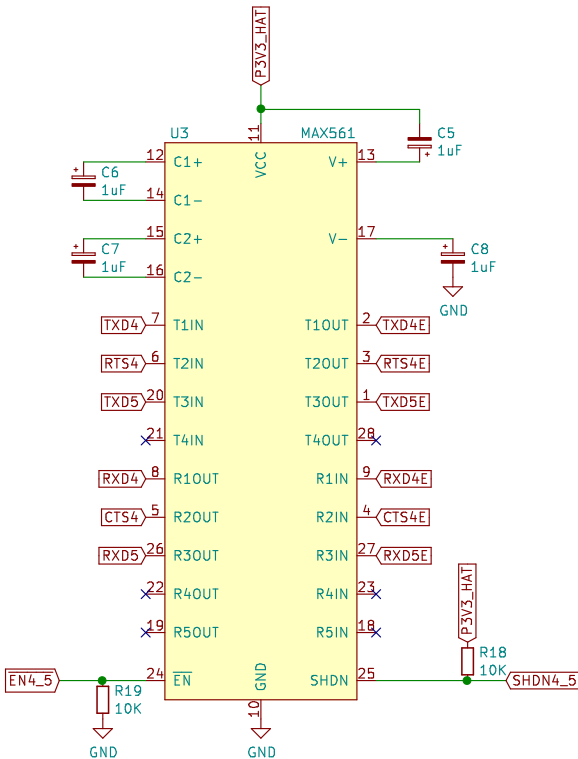KiCad E.D.A. kicad 5.1.5+dfsg1-2build2   Id: 1/1