


PRELIMINARY PAGES

Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PRELIMINARY PAGES TABLE OF CONTENTS
---	--

PLP. PRELIMINARY PAGES

TABLE OF CONTENTS	1/2
LIST OF EFFECTIVE SECTIONS/SUBSECTIONS	1/2
LIST OF EFFECTIVE OPERATIONS ENGINEERING BULLETINS	1/2
LIST OF EFFECTIVE FLIGHT CREW TRAINING BULLETINS	1/2
AIRCRAFT ALLOCATION TABLE	1/2
LIST OF MODIFICATIONS	1/2

IN. Introduction

OP. Operational Philosophy

NO. Normal Operations

AO. Abnormal Operations

SI. Supplementary Information

PIR. Preventing Identified Risks



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL


PRELIMINARY PAGES
TABLE OF CONTENTS

Intentionally left blank

M	Localization	Subsection Title	Pages	Rev. Date
	IN-010	GENERAL INTRODUCTION	1/2 to 2/2	08 JUL 08
	OP-010	INTRODUCTION	1/2 to 2/2	08 JUL 08
	OP-020	FLIGHT CONTROLS	1/16 to 16/16	08 JUL 08
	OP-030	AP / FD / ATHR	1/18 to 18/18	08 JUL 08
	OP-040	ECAM	1/10 to 10/10	08 JUL 08
	NO-010	GENERAL	1/4 to 4/4	08 JUL 08
	NO-020	PRE START	1/20 to 20/20	08 JUL 08
	NO-030	START	1/4 to 4/4	08 JUL 08
	NO-040	TAXI	1/10 to 10/10	08 JUL 08
	NO-050	TAKEOFF	1/10 to 10/10	08 JUL 08
	NO-060	CLIMB	1/6 to 6/6	08 JUL 08
	NO-070	CRUISE	1/14 to 14/14	08 JUL 08
	NO-080	DESCENT	1/8 to 8/8	08 JUL 08
	NO-090	HOLDING	1/2 to 2/2	08 JUL 08
	NO-100	APPROACH GENERAL	1/16 to 16/16	08 JUL 08
	NO-110	ILS APPROACH	1/6 to 6/6	08 JUL 08
	NO-120	NON PRECISION APPROACH	1/10 to 10/10	08 JUL 08
	NO-130	CIRCLING APPROACH	1/4 to 4/4	08 JUL 08
	NO-140	VISUAL APPROACH	1/4 to 4/4	08 JUL 08
	NO-150	PRECISION APPROACH	1/8 to 8/8	08 JUL 08
	NO-160	LANDING	1/12 to 12/12	08 JUL 08
	NO-170	GO AROUND	1/6 to 6/6	08 JUL 08
	NO-180	TAXI IN	1/4 to 4/4	08 JUL 08
	AO-010	GENERAL	1/6 to 6/6	08 JUL 08
	AO-020	OPERATING TECHNIQUES	1/16 to 16/16	08 JUL 08
	AO-022	AUTOFLIGHT	1/2 to 2/2	08 JUL 08
	AO-024	ELECTRICAL	1/2 to 2/2	08 JUL 08
	AO-026	FIRE PROTECTION	1/6 to 6/6	08 JUL 08
	AO-027	FLIGHT CONTROLS	1/2 to 2/2	08 JUL 08
	AO-028	FUEL	1/2 to 2/2	08 JUL 08
	AO-029	HYDRAULIC	1/4 to 4/4	08 JUL 08
	AO-032	LANDING GEAR	1/2 to 2/2	08 JUL 08
	AO-034	NAVIGATION	1/8 to 8/8	08 JUL 08
	AO-070	POWER PLANT	1/2 to 2/2	08 JUL 08
	AO-090	MISCELLANEOUS	1/6 to 6/6	08 JUL 08
	SI-010	ADVERSE WEATHER	1/16 to 16/16	08 JUL 08

PRELIMINARY PAGES**LIST OF EFFECTIVE SECTIONS/SUBSECTIONS**

M	Localization	Subsection Title	Pages	Rev. Date
	SI-020	FLYING REFERENCE	1/4 to 4/4	08 JUL 08
	SI-030	NAVIGATION ACCURACY	1/8 to 8/8	08 JUL 08
	SI-040	ZFW - ZFCG ENTRY ERRORSZFW - ZFCG ENTRY ERRORS	1/4 to 4/4	08 JUL 08
	SI-060	TCAS	1/4 to 4/4	08 JUL 08
	SI-070	USE OF RADAR	1/4 to 4/4	08 JUL 08
	PIR-010	PREVENTING IDENTIFIED RISKS	1/6 to 6/6	08 JUL 08

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PRELIMINARY PAGES LIST OF EFFECTIVE OPERATIONS ENGINEERING BULLETIN
---	--

M	Identification	T ⁽¹⁾	E ⁽²⁾	Rev. Date	Title
---	----------------	------------------	------------------	-----------	-------

(1) Ecam Importance Type
 (2) Documentary Unit Impacted by Ecam

No Operations Engineering Bulletin




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

PRELIMINARY PAGES

LIST OF EFFECTIVE OPERATIONS ENGINEERING BULLETIN

Intentionally left blank

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PRELIMINARY PAGES LIST OF EFFECTIVE FLIGHT CREW TRAINING BULLETIN
---	--

M	Identification	Rev. Date	Title
---	----------------	-----------	-------

No Flight Crew Training Bulletin



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

PRELIMINARY PAGES

LIST OF EFFECTIVE FLIGHT CREW TRAINING BULLETIN

Intentionally left blank


This table gives, for each delivered aircraft, the cross reference between:

- The Manufacturing Serial Number (MSN).
- The Fleet Serial Number (FSN) of the aircraft as known by AIRBUS S.A.S.
- The registration number of the aircraft as known by AIRBUS S.A.S.
- The aircraft model.

M	MSN	FSN	Registration Number	Model
	0781	FCA 0101	G-OOPH	321-211
	0852	FCA 0002	G-OOPE	321-211
	1320	FCA 0002	G-OOAR	320-214
	1637	FCA 0003	G-OOPU	320-214
	1720	FCA 0353	G-OOAV	321-211
	1777	FCA 0403	G-OOPW	320-214
	2180	FCA 0101	G-OOPX	320-214



Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PRELIMINARY PAGES LIST OF MODIFICATIONS
---	--

M	MODIFICATION	Linked SB	Incorp. Date	Title
	J0071		08 JUL 08	WINGS-WING TIP FENCES-INTRODUCE WING TIPS INCLUDING FENCES- Applicable to: ALL
	K2113		08 JUL 08	FUSELAGE - REAR FUSELAGE SECTION 16A - DEFINE A321 BASIC STRUCTURE Applicable to: MSN 0781-0852, 1720
	K2962		08 JUL 08	HYDRAULIC POWER-BLUE MAIN HYDRAULIC POWER-IMPROVE MAINTENANCE STATUS OF BLUE HYDRAULIC RESERVOIR Applicable to: MSN 1320-1637, 1777-2180
	P2316		08 JUL 08	AUTO FLIGHT - ACTIVATE WINDSHEAR FUNCTION Applicable to: ALL
	P3341	32-1136 02	08 JUL 08	LANDING GEAR - WHEELS AND BRAKES - INSTALL MESSIER GOODRICH WHEELS AND BRAKES ON A321 Applicable to: MSN 0781-0852, 1720
	P3379		08 JUL 08	INDICATING/RECORDING SYSTEMS - GENERAL- DEFINE CPIP3 Applicable to: ALL
	P3511		08 JUL 08	AUTO FLIGHT - FAC - INSTALL TWO FACS P/N BAM 0509 Applicable to: ALL
	P3560		08 JUL 08	AUTO FLIGHT - FMGC - PROVIDE TIME CONSTRAINT AND TEN CHARACTERS RTE IDENT FUNCTIONS Applicable to: ALL
	P3686		08 JUL 08	AUTO FLIGHT-FAC-INTRODUCE FAC P/N BAM 510 Applicable to: ALL
	P4089		08 JUL 08	AUTO FLIGHT-FMGC-REDUCE VAPP FOR A320 CFM/IAE Applicable to: MSN 1320-1637, 1777-2180
	P4319	22-1058 42	08 JUL 08	AUTO FLIGHT - FCU - DEFINE FLIGHT DIRECTOR ENGAGEMENT IN CROSSED BARS AT GO AROUND Applicable to: MSN 0781, 1320-2180
	P4320			




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

PRELIMINARY PAGES
LIST OF MODIFICATIONS

M	MODIFICATION	Linked SB	Incorp. Date	Title
	P5168		08 JUL 08	NAVIGATION - MMR - INSTALL COLLINS MMR PROVIDING ILS AND GPS FUNCTION Applicable to: MSN 1320-2180
	P5518	32-1232 01 32-1336 01	08 JUL 08	LANDING GEAR-NORMAL BRAKING-INTRODUCE STD 8 BSCU (TWIN VERSION) Applicable to: ALL
	P5768		08 JUL 08	ELEC PWR-AC EMERGENCY GENERATION-ACTIVATE A319/A321 ELECTRICAL EMERGENCY CONFIGURATION ON A320 A/C Applicable to: MSN 1320-1637, 1777-2180
	P6054	34-1186 05	08 JUL 08	NAVIGATION - MMR - ACTIVATE GPS PRIMARY FUNCTION (HYBRID) IN SEXTANT MMR (WITH HONEYWELL OR LITTON ADIRU) Applicable to: ALL
	P6183		08 JUL 08	NAVIGATION - MMR - REMOVE COLLINS MMR PROVIDING ILS (FM IMMUNE) AND GPS PRIMARY FUNCTION (PREVIOUS SPEC.) Applicable to: MSN 1320-2180
	P6375	32-1201 04	08 JUL 08	LANDING GEAR-PARKING/ULTIMATE EMERGENCY BRAKING-INTRODUCE A PRESSURE SWITCH Applicable to: MSN 0781-0852, 1637-2180
	P7519	22-1089 10	08 JUL 08	AUTOFLIGHT-FMGC-INSTALL FMGC CFM C13042AA01 (EQUIPPED WITH FMS2) HONEYWELL Applicable to: MSN 1320-2180
	P7721	32-1247 02	08 JUL 08	LANDING GEAR-WHEELS AND BRAKES-CANCEL MIXABILITY BETWEEN GOODRICH BRAKES 2-1600-2 AND -3 AUTHOR. WITH MOD 31803 Applicable to: MSN 1320-1637, 1777-2180
	P7790		08 JUL 08	AUTO FLIGHT - FLIGHT MANAGEMENT AND GUIDANCE SYSTEM - ACTIVATE FMA ENHANCEMENT FUNCTION Applicable to: MSN 2180

INTRODUCTION

Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	INTRODUCTION PRELIMINARY PAGES TABLE OF CONTENTS
---	--

IN-PLP. PRELIMINARY PAGES	
TABLE OF CONTENTS	1/2
IN-010. GENERAL INTRODUCTION	
FOREWORD.....	1/2
COMMENT - QUESTIONS - SUGGESTIONS	1/2



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

INTRODUCTION
PRELIMINARY PAGES
TABLE OF CONTENTS

Intentionally left blank



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

INTRODUCTION

GENERAL INTRODUCTION

FOREWORD

Ident.: IN-010-00005422.0001001 / 12 MAR 08

Applicable to: ALL

The Flight Crew Training Manual (FCTM) is published as a supplement to the Flight Crew Operating Manual (FCOM) and is designed to provide pilots with practical information on how to operate the Airbus aircraft. It should be read in conjunction with the FCOM. In the case of any conflict, the FCOM is the over-riding authority. Airline training policy may differ in certain areas. Should this be the case, the airline training policy is the over-riding authority.

COMMENT - QUESTIONS - SUGGESTIONS

Ident.: IN-010-00005423.0001001 / 26 MAR 08

Applicable to: ALL

FCTM holders and users are encouraged to submit questions and suggestions regarding this manual to:

fltops.trainingdata@airbus.com

or

AIRBUS

1, rond point Maurice BELLONTE

31707 BLAGNAC CEDEX- FRANCE

ATTN: Flight Operations Support – STLT




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

INTRODUCTION
GENERAL INTRODUCTION

Intentionally left blank

OPERATIONAL PHILOSOPHY

Intentionally left blank

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY PRELIMINARY PAGES TABLE OF CONTENTS
---	---

OP-PLP. PRELIMINARY PAGES

TABLE OF CONTENTS	1/2
-------------------------	-----

OP-010. INTRODUCTION

INTRODUCTION	1/2
OPERATIONAL GOLDEN RULES	1/2

OP-020. FLIGHT CONTROLS

INTRODUCTION	1/16
NORMAL LAW	1/16
ALTERNATE LAW	5/16
DIRECT LAW	6/16
INDICATIONS	6/16
PROTECTIONS	7/16
MECHANICAL BACKUP	13/16
ABNORMAL ATTITUDES	14/16
SIDESTICK AND TAKEOVER P/B	15/16

OP-030. AP / FD / ATHR

AUTOPILOT/FLIGHT DIRECTOR	1/18
AUTOTHRUST (A/THR)	4/18
AP, FD, A/THR MODE CHANGES AND REVERSIONS	10/18
TRIPLE CLICK	18/18

OP-040. ECAM

PURPOSE OF THE ECAM	1/10
MAIN principles	1/10
ECAM HANDLING	2/10
use of summaries	8/10



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

OPERATIONAL PHILOSOPHY

PRELIMINARY PAGES

TABLE OF CONTENTS

Intentionally left blank

INTRODUCTION

Ident.: OP-010-00005425.0001001 / 26 MAR 08

Applicable to: ALL

The Airbus cockpit is designed to achieve pilot operational needs throughout the aircraft operating environment, while ensuring maximum commonality within the Fly by Wire family.

The cockpit design objectives are driven by three criteria:

- Reinforce the safety of flight
- Improve efficiency of flight
- Answer pilot requirements in a continuously changing environment

Airbus operational rules result from the design concept, more particularly from the following systems:

- The **Fly by wire** system with its control laws and protections, commanded through the side stick,
- An integrated **Auto Flight System (AFS)** comprising:
 - The FMS interfaced through the MCDU,
 - The AP/FD interfaced through the FCU,
 - The A/THR interfaced through the non back driven thrust levers,
 - The FMA, providing Guidance targets and Information, to monitor the AFS
- A set of **Display units (DU)** providing information and parameters required by the crew
 - To operate and to navigate the aircraft (the EFIS)
 - To communicate (the DCDU)
 - To manage the aircraft systems (the ECAM)
 - FMA interface to provide Guidance targets and information to monitor the AFS/FD
- A **Forward Facing Cockpit Layout** with "Lights out" or "Dark Cockpit" concept assisting the crew to properly control the various aircraft systems.

The operational rules applicable to these specific features are given in the other sections of this chapter.

OPERATIONAL GOLDEN RULES

Ident.: OP-010-00005426.0001001 / 26 MAR 08

Applicable to: ALL

1. The aircraft can be flown like any other aircraft
2. Fly, navigate, communicate - in that order
3. One head up at all times

4. Cross check the accuracy of the FMS
5. Know your FMA at all times
6. When things don't go as expected - take over
7. Use the proper level of automation for the task
8. Practice task sharing and back-up each other

INTRODUCTION

Ident.: OP-020-00005427.0001001 / 26 MAR 08

Applicable to: ALL

The relationship between the Pilot Flying's (PF's) input on the sidestick, and the aircraft's response, is referred to as control law. This relationship determines the handling characteristics of the aircraft.

There are three sets of control laws, and they are provided according to the status of the: Computers, peripherals, and hydraulic generation.

The three sets of control laws are:

- Normal law
- Alternate law
- Direct law.

NORMAL LAW

Ident.: OP-020-00005428.0001001 / 29 MAY 08

Applicable to: ALL

OBJECTIVES

The aim of normal law is to provide the following handling characteristics within the normal flight envelope (regardless of aircraft speed, altitude, gross weight and CG):

- Aircraft must be stable and maneuverable
- The same response must be consistently obtained from the aircraft
- The Actions on the sidestick must be balanced in pitch and in roll.

The normal law handling characteristics, at the flight envelope limit are:

- The PF has full authority to achieve Maximum aircraft Performance
- The PF can have instinctive/immediate reaction, in the event of an emergency
- There is a reduced possibility of overcontrolling or overstressing the aircraft.

Normal Law is the law that is most commonly available, and it handles single failures.


CHARACTERISTICS IN PITCH**IN FLIGHT**

When the PF performs sidestick inputs, a constant G-load maneuver is ordered, and the aircraft responds with a G-Load/Pitch rate. Therefore, the PF's order is consistent with the response that is "naturally" expected from the aircraft: Pitch rate at low speed; Flight Path Rate or G, at high speed.

So, if there is no input on the stick:

- The aircraft maintains the flight path, even in case of speed changes
- In case of configuration changes or thrust variations, the aircraft compensates for the pitching moment effects
- In turbulence, small deviations occur on the flight path. However, the aircraft tends to regain a steady condition.

AIRBUS PITCH CHARACTERISTIC

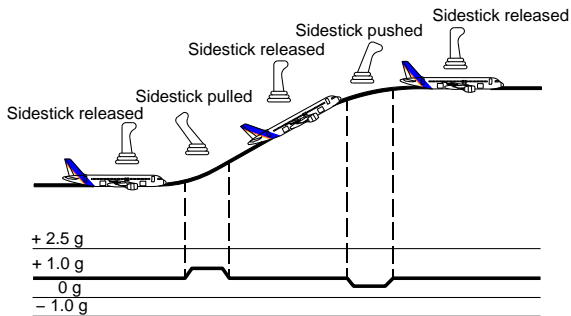

Operational Recommendation:

Since the aircraft is stable and auto-trimmed, the PF needs to perform minor corrections on the sidestick, if the aircraft deviates from its intended flight path. The PF should not fight the sidestick, or overcontrol it. If the PF senses an overcontrol, the sidestick should be released.

AT TAKEOFF AND LANDING

The above-mentioned pitch law is not the most appropriate for takeoff and flare, because the stable flight path is not what the PF naturally expects.

Therefore, the computers automatically adapt the control laws to the flight phases:

- **GROUND LAW:** The control law is direct law
- **FLARE LAW:** The control law is a pitch demand law.

Operational Recommendation:

Takeoff and landing maneuvers are naturally achieved. For example, a flare requires the PF to apply permanent aft pressure on the sidestick, in order to achieve a progressive flare. Whereas, derotation consists of smoothly flying the nosegear down, by applying slight aft pressure on the sidestick.

LATERAL CHARACTERISTICS

NORMAL CONDITIONS

When the PF performs a lateral input on the sidestick, a roll rate is ordered and naturally obtained.

Therefore, at a bank angle of less than 33° , with no input on the sidestick, a zero roll rate is ordered, and the current bank angle is maintained. Consequently, the aircraft is laterally stable, and no aileron trim is required.


However, lateral law is also a mixture of roll and yaw demand with:

- Automatic turn coordination
- Automatic yaw damping
- Initial yaw damper response to a major aircraft asymmetry.

In addition, if the bank angle is less than 33° , pitch compensation is provided.

If the bank angle is greater than 33° , spiral stability is reintroduced and pitch compensation is no longer available. This is because, in normal situations, there is no operational reason to fly with such high bank angles for a long period of time.

AIRBUS LATERAL CHARACTERISTIC

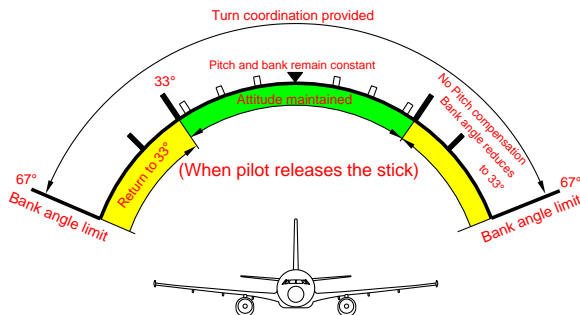

Operational Recommendation:

During a normal turn (bank angle less than 33°), in level flight:

- The PF moves the sidestick laterally (the more the sidestick is moved laterally, the greater the resulting roll rate - e.g. $15^\circ/\text{s}$ at max deflection)
- It is not necessary to make a pitch correction
- It is not necessary to use the rudder.

In the case of steep turns (bank angle greater than 33°), the PF must apply:

- Lateral pressure on the sidestick to maintain bank

- Aft pressure on the sidestick to maintain level flight.

ENGINE FAILURE

In flight, if an engine failure occurs, and no input is applied on the sidestick, lateral normal law controls the natural tendency of the aircraft to roll and yaw.

If no input is applied on the sidestick, the aircraft will reach an approximate 5 ° constant bank angle, a constant sideslip, and a slowly-diverging heading rate.

The lateral behavior of aircraft is safe.

However, the PF is best suited to adapt the lateral trimming technique, when necessary. From a performance standpoint, the most effective flying technique, in the event of an engine failure at takeoff, is to fly a constant heading with roll surfaces retracted. This technique dictates the amount of rudder that is required, and the resulting residual sideslip.

As a result, to indicate the amount of rudder that is required to correctly fly with an

- Load factor protection
- High pitch attitude protection
- Bank angle protection
- High speed protection.

ALTERNATE LAW

Ident.: OP-020-00005429.0001001 / 29 MAY 08

Applicable to: ALL

In some double failure cases, the integrity and redundancy of the computers and of the peripherals are not sufficient to achieve normal law and associated protections. System degradation is progressive, and will evolve according to the availability of remaining peripherals or computers.

Alternate law characteristics (usually triggered in case of a dual failure):

- In pitch: same as in normal law with FLARE in DIRECT
- In roll: Roll DIRECT
- Most protections are lost, except Load factor protection.

At the flight envelope limit, the aircraft is not protected, i.e.:

- In high speed, natural aircraft static stability is restored with an overspeed warning
- In low speed (at a speed threshold that is below VLS), the automatic pitch trim stops and natural longitudinal static stability is restored, with a stall warning at 1.03 VS1G.

In certain failure cases, such as the loss of VS1G computation or the loss of two ADRs, the longitudinal static stability cannot be restored at low speed. In the case of a loss of three ADRs, it cannot be restored at high speed.

In alternate law, VMO setting is reduced to 320 kt, and α FLOOR is inhibited. (On A318, MMO setting is also reduced to M 0.77.)

OPERATIONAL RECOMMENDATION:

The handling characteristics within the normal flight envelope, are identical in pitch with normal law.

Outside the normal flight envelope, the PF must take appropriate preventive actions to avoid losing control, and/or avoid high speed excursions. These actions are the same as those that would be applied in any case where non protected aircraft (e.g. in case of stall warning: add thrust, reduce pitch, check speedbrakes retracted).

DIRECT LAW

Ident.: OP-020-00005430.0001001 / 26 MAR 08

Applicable to: ALL

In most triple failure cases, direct law triggers.

When this occurs:

- Elevator deflection is proportional to stick deflection. Maximum deflection depends on the configuration and on the CG
- Aileron and spoiler deflections are proportional to stick deflection, but vary with the aircraft configuration
- Pitch trim is commanded manually

Handling characteristics are natural, of high-quality aircraft, almost independent of the configuration and of the CG. Therefore, the aircraft obviously has no protections, no automatic pitch trim, but overspeed or stall warnings.

OPERATIONAL RECOMMENDATION:

The PF must avoid performing large thrust changes, or sudden speedbrake movements, particularly if the center of gravity is aft. If the speedbrakes are out, and the aircraft has been re-trimmed, the PF must gently retract the speedbrakes, to give time to retrim, and thereby avoid a large, nose-down trim change.

INDICATIONS

Ident.: OP-020-00005431.0001001 / 27 JUN 08

Applicable to: ALL

The ECAM and PFD indicate any control law degradation.

ON THE ECAM

- In **ALTN Law**:
FLT CTL ALTN LAW (PROT LOST)
MAX SPEED 320 kt(320 kt/M 0.77 on A318)
- In **Direct Law**:
FLT CTL DIRECT LAW (PROT LOST)
MAX SPEED 320 kt/M 0.77
MAN PITCH TRIM USE

ON THE PFD

The PFD enhances the PF's awareness of the status of flight controls.


Specific symbols (= in green), and specific formatting of low speed information on the

speed scale in normal law, indicate which protections are available.

When protections are lost, amber crosses (X) appear, instead of the green protection symbols (=).

When automatic pitch trim is no longer available, the PFD indicates this with an amber "USE MAN PITCH TRIM" message below the FMA.

Fly-by-Wire Status Awareness via the PFD

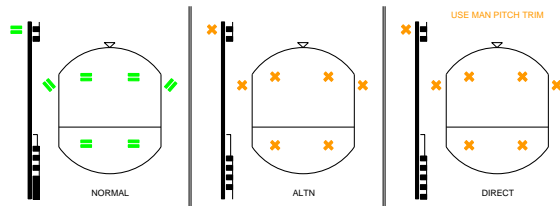

Therefore, by simply looking at this main instrument (PFD), the flight crew is immediately aware of the status of flight controls, and the operational consequences.

PROTECTIONS

Ident.: OP-020-00005434.0002001 / 27 JUN 08

Applicable to: ALL

OBJECTIVES

One of the PF's primary tasks is to maintain the aircraft within the limits of the normal flight envelope. However, some circumstances, due to extreme situations or aircraft mishandling, may provoke the violation of these limits.

Despite system protections, the PF must not exceed deliberately the normal flight envelope. In addition, these protections are not designed to be structural limit protections (e.g. opposite rudder pedal inputs). Rather, they are designed to assist the PF in emergency and stressful situations, where only instinctive and rapid reactions will be effective.

Protections are intended to:

- Provide full authority to the PF to consistently achieve the best possible aircraft performance in extreme conditions
- Reduce the risks of overcontrolling, or overstressing the aircraft
- Provide PF with an instinctive and immediate procedure to ensure that the PF achieves the best possible result.

BANK ANGLE PROTECTION

Bank angle protection prevents that any major upset, or PF mishandling, causes the aircraft to be in a high-bank situation (wherein aircraft recovery is complex, due to the difficulty to properly assess such a situation and readily react). Bank angle protection provides the PF with full authority to efficiently achieve any required roll maneuver.

The maximum achievable bank angle is plus or minus:

- 67 °, within the Normal Flight envelope (2.5 g level flight)
- 40 °, in high Speed protection (to prevent spiral dive)
- 45 °, in high Angle-Of-Attack protection

HIGH SPEED PROTECTION


When flying beyond maximum design speeds VD/MD (which are greater than VMO/MMO), there is an increased potential for aircraft control difficulties and structural concerns, due to high air loads. Therefore, the margin between VMO/MMO and VD/MD must be such that any possible overshoot of the normal flight envelope should not cause any major difficulty.

High speed protection adds a positive nose-up G demand to a sidestick order, in order to protect the aircraft, in the event of a dive or vertical upset. As a result, this enables a reduction in the margin between VMO/MMO and VD/MD.

Therefore, in a dive situation:

- If there is no sidestick input on the sidestick, the aircraft will slightly overshoot VMO/MMO and fly back towards the envelope.
- If the sidestick is maintained full forward, the aircraft will significantly overshoot VMO/MMO without reaching VD/MD. At approximately VMO +16 / MMO +0.04, the pitch nose-down authority smoothly reduces to zero (which does not mean that the aircraft stabilizes at that speed).

airbus HIGH SPEED PROTECTION

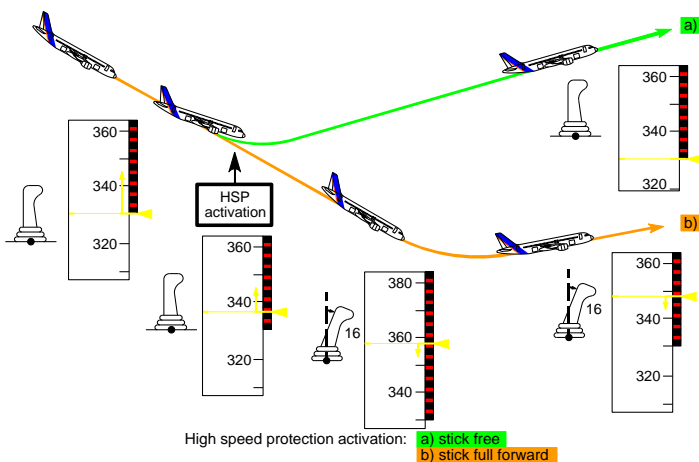

The PF, therefore, has full authority to perform a high speed/steep dive escape maneuver, when required, via a reflex action on the sidestick.

Note:

1. An **OVERSPEED** warning is provided.
2. At high altitude, this may result in activation of the angle of attack protection.

Depending on the ELAC standard, the crew may have to push on the stick to get out of this protection law.

LOAD FACTOR PROTECTION


On commercial aircraft, high load factors can be encountered during evasive maneuvers due to potential collisions, or CFIT ...

Pulling "g" is efficient, if the resulting maneuver is really flown with this "g" number. If the aircraft is not able to fly this trajectory, or to perform this maneuver, pulling "g" will be detrimental.

On commercial aircraft, the maximum load that is structurally allowed is:

- 2.5 g in clean configuration,
- 2.0 g with the flaps extended.

AIRBUS LOAD FACTOR PROTECTION and safety



On most commercial aircraft, the potential for an efficient 2.5 g maneuver is very remote. Furthermore, as G Load information is not continuously provided in the cockpit, airline pilots are not used to controlling this parameter. This is further evidenced by inflight experience, which reveals that: In emergency situations, initial PF reaction on a yoke or sidestick is hesitant, then aggressive.

With load factor protection, the PF may immediately and instinctively pull the sidestick full aft: The aircraft will initially fly a 2.5 g maneuver without losing time. Then, if the PF still needs to maintain the sidestick full aft stick, because the danger still exists, then the high AOA protection will take over. Load factor protection enhances this high AOA protection.

Load factor protection enables immediate PF reaction, without any risk of overstressing the aircraft.

Flight experience has also revealed that an immediate 2.5 g reaction provides larger obstacle clearance, than a hesitant and delayed high G Load maneuver (two-second delay).

HIGH PITCH ATTITUDE PROTECTION

Excessive pitch attitudes, caused by upsets or inappropriate maneuvers, lead to hazardous situations:

- Too high a nose-up \Rightarrow Very rapid energy loss
- Too low a nose-down \Rightarrow Very rapid energy gain

Furthermore, there is no emergency situation that requires flying at excessive attitudes. For these reasons, pitch attitude protection limits pitch attitude to plus 30 °/minus 15 °.


Pitch attitude protection enhances high speed protection, high load factor protection, and high AOA protection.

HIGH ANGLE-OF-ATTACK (AOA) PROTECTION

High AOA protection is an aerodynamic protection:

- The PF will notice if the normal flight envelope is exceeded for any reason, because the autopitch trim will stop, the aircraft will sink to maintain its current AOA (alpha PROT, strong static stability), and a significant change in aircraft behavior will occur.
- If the PF then pulls the sidestick full aft, a maximum AOA (approximately corresponding to CL Max) is commanded. In addition, the speedbrakes will automatically retract, if extended.

airbus AOA PROTECTION

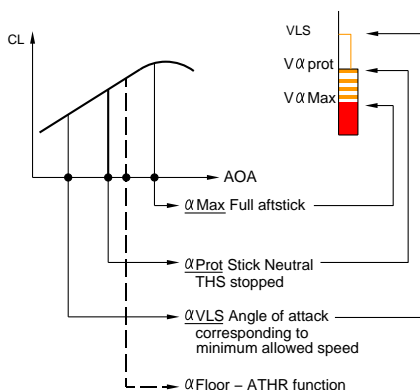

In addition to this aerodynamic protection, there are three more energy features:

- If ATHR is in SPEED mode, the speed cannot drop below VLS, even if the target speed is below VLS

- An aural low-energy "SPEED SPEED SPEED" warning, warns the flight crew that the energy of the aircraft is below a threshold under which they will have to increase thrust, in order to regain a positive flight path angle through pitch control. It is available in CONF 2, CONF 3, and CONF FULL.

The FAC computes the energy level with the following inputs:

- Aircraft configuration
- Horizontal deceleration rate
- Flight path angle

For example, if the aircraft decelerates at 1 kt/sec, and:

- The FPA is -3° , the alert will trigger at approximately VLS -8,
- The FPA is -4° , the alert will trigger at approximately VLS -2.

This alert draws the PF's attention to the SPEED scale, and indicates the need to adjust thrust.

It comes immediately before the ALPHA Floor.

- If the angle-of-attack still increases and reaches ALPHA Floor threshold, the A/THR triggers TOGA thrust and engages (unless in some cases of one engine-out).

In case of an emergency situation, such as Windshear or CFIT, the PF is assisted in order to optimize aircraft performance via the:

- A/THR: Adds thrust to maintain the speed above VLS
- Low energy warning "SPEED, SPEED, SPEED": Enhances PF awareness
- ALPHA FLOOR: Provides TOGA thrust
- HIGH AOA protection: Provides maximum aerodynamic lift
- Automatic speedbrake retraction: Minimizes drag.

OPERATIONAL RECOMMENDATIONS:

When flying at alpha max, the PF can make gentle turns, if necessary.

The PF must not deliberately fly the aircraft in alpha protection, except for brief periods, when maximum maneuvering speed is required.

If alpha protection is inadvertently entered, the PF must exit it as quickly as possible, by easing the sidestick forward to reduce the angle-of-attack, while simultaneously adding power (if alpha floor has not yet been activated, or has been cancelled). If alpha floor has been triggered, it must be cancelled with the instinctive disconnect pushbutton (on either thrust lever), as soon as a safe speed is resumed.

In case of GPWS/SHEAR:


- Set the thrust levers to TOGA
- Pull the sidestick to full aft (For shear, fly the SRS, until full aft sidestick).

- Initially maintain the wings level

This immediately provides maximum lift/maximum thrust/minimum drag.

Therefore, CFIT escape maneuvers will be much more efficient.

PROTECTED A/C VERSUS NON PROTECTED A/C GO-AROUND TRAJECTORY

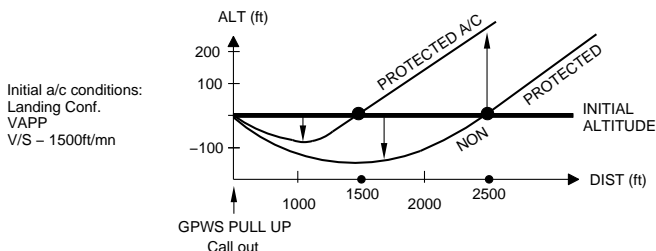

The above-illustrated are typical trajectories flown by all protected or not protected aircraft, when the PF applies the escape procedure after an aural " GPWS PULL UP" alert.

The graph demonstrates the efficiency of the protection, to ensure a duck-under that is 50 % lower, a bucket-distance that is 50 % shorter, a safety margin that more than doubles (due to a quicker reaction time), and a significant altitude gain (± 250 ft). These characteristics are common to all protected aircraft, because the escape procedure is easy to achieve, and enables the PF to fly the aircraft at a constant AOA, close to the max AOA. It is much more difficult to fly the stick shaker AOA on an aircraft that is not protected.

MECHANICAL BACKUP

Ident.: OP-020-00005432.0001001 / 29 MAY 08

Applicable to: ALL

The purpose of the **mechanical** backup is to achieve all safety objectives in MMEL dispatch condition: To manage a temporary and total electrical loss, the temporary loss of five fly-by-wire computers, the loss of both elevators, or the total loss of ailerons and spoilers.


It must be noted that it is very unlikely that the **mechanical** backup will be used, due to the fly-by-wire architecture. For example, in case of electrical emergency configuration, or an all-engine flameout, alternate law remains available.

In the unlikely event of such a failure, **mechanical** backup enables the PF to safely stabilize the aircraft, using the rudder and manual pitch trim, while reconfiguring the systems.

In such cases, the objective is not to fly the aircraft accurately, but to maintain the aircraft attitude safe and stabilized, in order to allow the restoration of lost systems. The pitch trim wheel is used to control pitch. Any action on the pitch trim wheel should be applied smoothly, because the THS effect is significant due to its large size. The rudder provides lateral control, and induces a significant roll with a slight delay. The PF should apply some rudder to turn, and wait for the aircraft reaction. To stabilize and level the wings, anticipate by releasing the rudder pedals. A red "MAN PITCH TRIM ONLY" message appears on the PFD to immediately inform the PF that the mechanical backup is being used.

back-up indication on PFD

MAN PITCH TRIM ONLY



ABNORMAL ATTITUDES

Ident.: OP-020-00005433.0001001 / 29 MAY 08

Applicable to: ALL

If the aircraft is, for any reason, far outside the normal flight envelope and reaches an abnormal attitude, the normal controls are modified and provide the PF with maximum efficiency in regaining normal attitudes. (An example of a typical reason for being far outside the normal flight envelope would be the avoidance of a mid-air collision).

The so-called "abnormal attitude" law is :

- Pitch alternate with load factor protection (without autotrim)
- Lateral direct law with yaw alternate

These laws trigger, when extreme values are reached:

- Pitch (50 ° up, 30 ° down)
- Bank (125 °)
- AOA (30 °, -10 °)
- Speed (440 kt, 60 kt)
- Mach (0.96, 0.1).

It is very unlikely that the aircraft will reach these attitudes, because fly-by-wire provides

protection to ensure rapid reaction far in advance. This will minimize the effect and potential for such aerodynamic upsets.

The effectiveness of fly-by-wire architecture, and the existence of control laws, eliminate the need for upset recovery maneuvers to be trained on protected Airbus aircraft.

SIDESTICK AND TAKEOVER P/B

Ident.: OP-020-00005435.0001001 / 29 MAY 08

Applicable to: ALL

When the Pilot Flying (PF) makes an input on the sidestick, an order (an electrical signal) is sent to the fly-by-wire computer. If the Pilot Not Flying (PNF) also acts on the stick, then both signals/orders are added.

Therefore, as on any other aircraft type, PF and PNF must not act on their sidesticks at the same time. If the PNF (or Instructor) needs to take over, the PNF must press the sidestick takeover pushbutton, and announce: "I have control".

If a flight crewmember falls on a sidestick, or a mechanical failure leads to a jammed stick (there is no associate ECAM caution), the "failed" sidestick order is added to the "non failed" sidestick order.

In this case, the other not affected flight crewmember must press the sidestick takeover pushbutton for at least 40 s, in order to deactivate the "failed" sidestick.

A pilot can at any time reactivate a deactivated stick by momentarily pressing the takeover pushbutton on either stick.

In case of a "SIDE STICK FAULT" ECAM warning, due to an electrical failure, the affected sidestick order (sent to the computer) is forced to zero. This automatically deactivates the affected sidestick. This explains why there is no procedure associated with this warning.




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

OPERATIONAL PHILOSOPHY

FLIGHT CONTROLS

Intentionally left blank

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY AP / FD / ATHR
---	---

AUTOPILOT/FLIGHT DIRECTOR

Ident.: OP-030-00005439.0001001 / 04 JUN 08
 Applicable to: ALL

OBJECTIVE

The Auto Pilot (AP) and Flight Director

MAIN INTERFACES WITH THE AP/FD

MCDU Long-term* interface

To prepare lateral or vertical revisions, or to preset the speed for the next phase.

FCU Short-term interface

To **select** the ATC HDG, expedite, speed, etc.
(quickly performed "head-up")

*The DIR TO function is an exception to this rule.

OPERATIONAL RECOMMENDATION:

With the FMS, anticipate flight plan updates by preparing:

- EN ROUTE DIVERSIONS
- DIVERSION TO ALTN
- CIRCLING
- LATE CHANGE OF RWY

in the SEC F-PLN. This enables the MCDU to be used for short-term actions.

TASKSHARING AND COMMUNICATIONS

The FCU and MCDU must be used, in accordance with the rules outlined below, in order to ensure:

- Safe operation (correct entries made)
- Effective inter-pilot communication (knowing each other's intentions)
- Comfortable operations (use "available hands", as appropriate)

MCDU entries are performed by the PF, during a temporary transfer of command to the PNF.

A crosscheck must be performed.

Time-consuming entries should be avoided below 10000 feet.

Entries should be restricted to those that have an operational benefit.

(PERF APPR, DIR TO, DIR TO INTERCEPT, RAD NAV, LATE CHANGE OF RUNWAY, ACTIVATE SEC F-PLN, ENABLE ALTN)

FCU entries are performed by:

- The PF, with the AP on.
- The PNF (upon PF request), with the AP off.

FCU entries must be announced.


Upon FCU entries:

The PF must check and announce the corresponding PFD/FMA target and mode.

The PNF must crosscheck and announce "CHECKED".

AP/FD MONITORING

The FMA indicates the status of the AP, FD, and A/THR, and their corresponding

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY AP / FD / ATHR
---	---

operating modes. The PF must monitor the FMA, and announce any FMA changes. The flight crew uses the FCU or MCDU to give orders to the AP/FD. The aircraft is expected to fly in accordance with these orders.

The main concern for the flight crew should be:

WHAT IS THE AIRCRAFT EXPECTED TO FLY NOW ?

WHAT IS THE AIRCRAFT EXPECTED TO FLY NEXT ?

If the aircraft does not fly as expected:

And, if in managed mode  Select the desired target

- Or, disengage the AP, and fly the aircraft manually.

AUTOPILOT (AP) OPERATION

The AP can be engaged within the normal flight envelope, 5 s after liftoff and at least 100 ft. It automatically disengages, when the aircraft flies significantly outside the normal flight envelope limits.

The AP cannot be engaged, when the aircraft is outside the flight envelope. Flight control laws are designed to assist the flight crew to return within the flight envelope, in accordance with the selected strategy.

The AP may be used:

- For autoland: Down to the aircraft landing rollout, in accordance with the limitations indicated in the FCOM
- For other approaches, down to:
 - The MDA for straight in Non Precision Approach
 - MDA - 100 ft for circling approach
 - 160 ft for ILS approach with CAT1 displayed on FMA
 - 500 ft for all others phases.

It may also be used, in case of:

- Engine failure: Without any restriction, within the demonstrated limits, including autoland
- Abnormal configuration (e.g. slats/flaps failure): Down to 500 ft AGL. Extra vigilance is required in these configurations. The flight crew must be ready to take over, if the aircraft deviates from its intended, safe flight path.

The sidestick's instinctive disconnect pushbutton should be used to disengage the AP. Instinctive override action on the sidestick consists of pushing or pulling the sidestick, when the AP is engaged. This action disengages the AP, and should be done as per design, i.e. in case of an instinctive reaction (to an AP hard over for example).

USE OF THE FD WITHOUT THE AP

When manually flying the aircraft with the FDs on, the FD bars or the FPD symbol provide lateral and vertical orders, in accordance with the active modes that the flight crew selects.

Therefore:

- Fly with a centered FD or FPD
- If not using FD orders, turn off the FD.

It is strongly recommended to turn off both FDs, to ensure that the A/THR is in SPEED mode, if the A/THR is active.

AUTOTHRUST (A/THR)

Ident.: OP-030-00005436.0002001 / 23 JUN 08

Applicable to: ALL

OBJECTIVE

The A/THR computer (within the FG) interfaces directly with the engine computer, referred to as the FADEC.

The A/THR sends to the FADEC the thrust targets that are needed to:

- Obtain and maintain a target speed, when in SPEED mode
- Obtain a specific thrust setting (e.g. CLB, IDLE), when in THRUST mode.

INTERFACE

When the A/THR is active, the thrust lever position determines the maximum thrust that the A/THR can command in SPEED or THRUST mode. Therefore, with A/THR active, thrust levers act as a thrust limiter or a thrust-rating panel.

The A/THR computer does not drive back the thrust levers. The PF sets them to a specific detent on the thrust lever range.


The A/THR system provides cues that indicate the energy of the aircraft:

- Speed, acceleration, or deceleration, obtained by the speed trend vector
- N1, and N1 command on the N1 gauge.

All these cues are in the flight crew's direct line of vision.

In other words, the Thrust Lever Angle (TLA) should not be used to monitor correct A/THR operation. Neither should the thrust lever position of a conventional autothrottle, be considered a cue because, in many hazardous situations, the thrust lever position can be misleading (e.g. engine failure, thrust lever jammed).

The TLP determines MAX Thrust for the A/THR

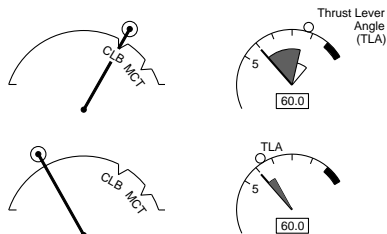


NORMAL OPERATIONS

The A/THR can only be active, when the thrust levers are between IDLE and the CLB detent.

When the thrust levers are beyond the CLB detent, thrust is controlled manually to the thrust lever Angle, and the A/THR is armed. This means that the A/THR is ready to be re-activated, when the flight crew sets the thrust levers back to the CLB detent (or below). A/THR appears in blue on the FMA.

A/THR operating sectors all engines operating

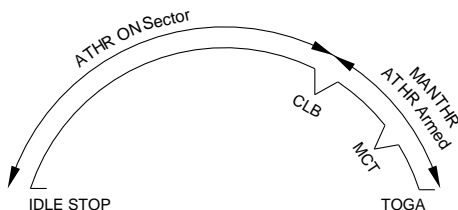

AT TAKEOFF

The thrust levers are set either full forward to TOGA, or to the FLX detent. Thrust is manually controlled to the TLA, and A/THR is armed. The FMA indicates this in blue.

AFTER TAKEOFF

When the aircraft reaches THR RED ALT, the flight crew sets the thrust levers back to the CLB detent. This activates A/THR. MAX CLB will, therefore, be the maximum normal thrust setting that will be commanded by the A/THR in CLB, CRZ, DES, or APPR, as required.


THRUST LEVER(S) BELOW THE CLB DETENT

If one thrust lever is set to below the CLB detent, the FMA triggers a LVR ASYM message, as a reminder to the flight crew (e.g. this configuration might be required due to an engine's high vibration level). However, if all thrust levers are set to below the CLB detent, with the A/THR active, then the ECAM repeatedly triggers the AUTO FLT A/THR LIMITED caution. This is because there is no operational reason to be in such a situation, and to permanently limit A/THR authority on all engines. In this case, all thrust levers should either be brought back to the CLB detent, or the A/THR should be set to OFF.

THRUST LEVERS BEYOND THE CLB DETENT

If all thrust levers are set to beyond the CLB detent, when A/THR is active, the flight crew manually controls thrust to the Thrust Lever Angle. The FMA displays THR or MAN THR, and the A/THR is armed. As a reminder, CLB or LVR CLB flashes on the FMA. This technique is most efficient, when the aircraft speed goes significantly below the target. When the aircraft speed or acceleration is satisfactory, the thrust levers should be brought back to the CLB detent. This re-activates the A/THR.

Speed Drop in Approach: Recommended Recovery Technique

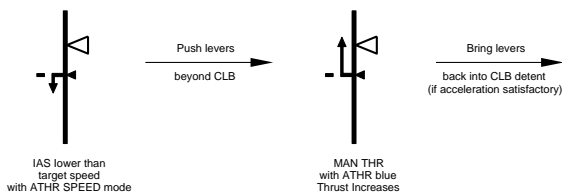


Note: When using this technique during approach (e.g. to regain VAPP), the thrust levers should be moved past the CLB detent, but not beyond the MCT. In most cases, it is not necessary to go beyond MCT, and the PF may inadvertently advance thrust levers all the way to the TOGA stop, and thereby engage go-around mode.

OPERATIONS WITH ONE ENGINE INOPERATIVE

The above-noted principles also apply to an one-engine inoperative situation, except that A/THR can only be active, when the thrust levers are set between IDLE and MCT.


A/THR operating sectors - one engine inoperative

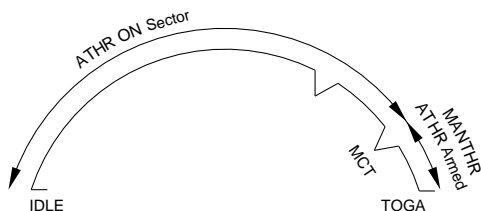

In case of engine failure, the thrust levers will be in MCT detent for remainder of the flight. This is because MCT is the maximum thrust that can usually be commanded by the A/THR for climb or acceleration, in all flight phases (e.g. CLB, CRZ, DES or APPR).

TO SET AUTOTHURST TO OFF

How to set A/THR off

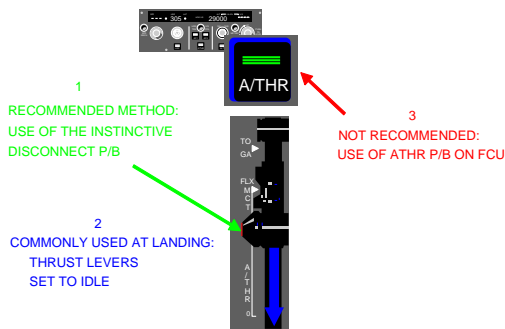

1) USE OF INSTINCTIVE DISCONNECT (I/D) PUSHBUTTON

If the I/D pushbutton is pressed when the thrust levers are in CLB detent, thrust will increase to MAX CLB. This may cause a not desired thrust change. For example, during approach, A/THR in SPEED mode, commands approximately N1 55 %. If the PF presses the I/D pushbutton, the A/THR is set to off, and thrust goes to MAX CLB. This will perturbate the approach.


Therefore, the recommended technique for setting A/THR to off is:

- Return the thrust levers to approximately the current thrust setting, by observing the TLA symbol on the thrust gauge

- Press the I/D pushbutton

This technique minimizes thrust discontinuity, when setting A/THR to off.

recommended technique to set A/THR off



2) THRUST LEVERS SET TO IDLE

If thrust levers are set to IDLE, A/THR is set to off. This technique is usually used in descent, when the A/THR is in THR IDLE, or at landing. During flare, with the A/THR active, the thrust levers are set to the CLB detent. Then, when thrust reduction is required for landing, the thrust levers should be moved smoothly and set to the IDLE stop. This will retard thrust, and set A/THR to off. As a reminder, the "RETARD" aural alert will sound. In flare, this aural alert will occur at 20 ft, except in the case of autoland, where it occurs at 10 ft.

It should be noted that, when the thrust levers are set back to IDLE and A/THR set to off: The A/THR can be reactivated by pressing the pushbutton on the FCU, and returning the thrust levers to the applicable detent. The thrust levers should be immediately returned to the applicable detent, in order to avoid an ECAM "AUTO FLT A/THR LIMITED" message

3) USE OF THE FCU PUSHBUTTON

Use of the FCU pushbutton is considered to be an involuntary A/THR off command (e.g. in the case of a failure). When pressed, thrust is frozen and remains locked at the value it had when the flight crew pressed the A/THR pushbutton, as long as the thrust levers remain in the CLB or MCT detent.

If thrust levers are out of detent, thrust is manually controlled and, therefore, unlocked.

An ECAM caution and an FMA message trigger during thrust lock:

- THR LK appears in amber on the FMA

- The ECAM caution is:
AUTOFLT: A/THR OFF
 THR MOVE
 LEVERS
ENG: THRUST LOCKED
 THR MOVE
 LEVERS

In this case, when the flight crew moves the thrust levers out of detent, full manual control is recovered, and the THRUST LOCKED message disappears from the FMA. This feature should not be used, unless the instinctive disconnect pushbuttons are inoperative.


ALPHA FLOOR

When the aircraft's angle-of-attack goes beyond the ALPHA FLOOR threshold, this means that the aircraft has decelerated significantly (below ALPHA PROT speed): A/THR activates automatically and orders TOGA thrust, regardless of the thrust lever position.

The example below illustrates that:

- The aircraft is in descent with the thrust levers manually set to IDLE.
- The aircraft decelerates, during manual flight with the FD off, as indicated on the FMA.

Speed scale and FMA indications in a typical A floor case

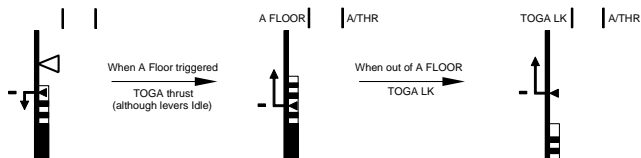

When the speed decreases, so that the angle-of-attack reaches the ALPHA FLOOR threshold, A/THR activates and orders TOGA thrust, despite the fact that the thrust levers are at IDLE.

When the aircraft accelerates again, the angle-of-attack drops below the ALPHA FLOOR threshold. TOGA thrust is maintained or locked. This enables the flight crew to reduce thrust, as necessary. TOGA LK appears on the FMA to indicate that TOGA thrust is locked. The desired thrust can only be recovered by setting A/THR to off, with the instinctive disconnect pushbutton.

ALPHA floor is available, when the flight controls are in NORMAL LAW, from liftoff to 100 ft RA at landing. It is inhibited in some cases of engine failure.


A/THR USE - SUMMARY

Use of A/THR is recommended during the entire flight.

It may be used in most failures cases, including:

- Engine failure, even during autoland
- Abnormal configurations

A/THR use in flight

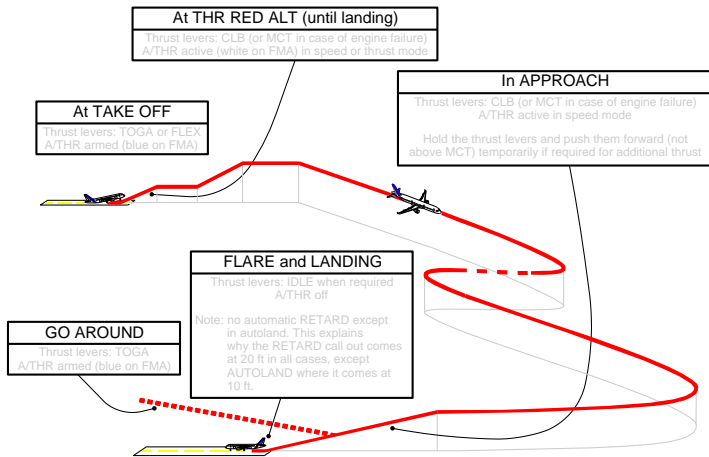

A/THR should be monitored via the:

- FMA – SPEED / SPEED TREND on the PFD
- N1/N1 command (EPR) on the ECAM E/WD.

AP, FD, A/THR MODE CHANGES AND REVERSIONS

Ident.: OP-030-00005437.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

INTRODUCTION

The flight crew manually engages the modes.

However, they may change automatically, depending on the:

- AP, FD, and A/THR system integration
- Logical sequence of modes

- So-called "mode reversions".

AP, FD, ATHR SYSTEM INTEGRATION

There is a direct relationship between aircraft pitch control, and engine thrust control. This relationship is designed to manage the aircraft's energy.

- If the AP/FD pitch mode controls a vertical trajectory (e.g. ALT, V/S, FPA, G/S):
A/THR controls speed
- If the AP/FD pitch mode controls a speed (e.g. OP CLB, OP DES):
A/THR controls thrust (THR CLB, THR IDLE)
- If no AP/FD pitch mode is engaged (i.e. AP is off and FD is off):
A/THR controls speed

Therefore, any change in the AP/FD pitch mode is associated with a change in the A/THR mode.


Note: For this reason, the FMA displays the A/THR mode and the AP/FD vertical mode columns next to each other.

THE LOGICAL SEQUENCE OF MODES

In climb, when the flight crew selects a climb mode, they usually define an altitude target, and expect the aircraft to capture and track this altitude. Therefore, when the flight crew selects a climb mode, the next logical mode is automatically armed.

For example:


AP/FD mode capture and tracking (1)



The flight crew may also manually arm a mode in advance, so that the AP/FD intercepts a defined trajectory.

Typically, the flight crew may arm NAV, LOC-G/S, and APPNAV-FINAL. When the capture or tracking conditions occur, the mode will change sequentially.

AP/FD mode capture and tracking (2)

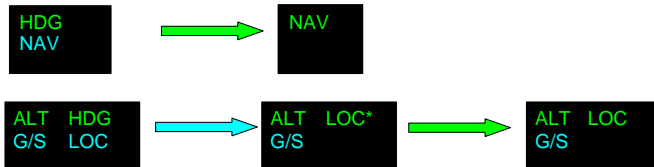

These logical mode changes occur, when the modes are armed. They appear in blue on the FMA.

MODE REVERSIONS

GENERAL

Mode reversions are automatic mode changes that unexpectedly occur, but are designed to ensure coherent AP, FD, and A/THR operations, in conjunction with flight crew input (or when entering a F-PLN discontinuity).


For example, a reversion will occur, when the flight crew:

- Changes the FCU ALT target in specific conditions
- Engages a mode on one axis, that will automatically disengage the associated mode on the other axis

Due to the unexpected nature of their occurrence, the FMA should be closely-monitored for mode reversions.

FLIGHT CREW CHANGE OF FCU ALT TARGET \Rightarrow ACTIVE VERTICAL MODE NOT POSSIBLE

FCU change resulting reversion to VS mode



This reversion to the V/S (FPA) mode on the current V/S target does not modify the pitch behaviour of the aircraft.

It is the flight crew's responsibility to change it as required.

FLIGHT CREW HDG OR TRK MODE ENGAGEMENT \Rightarrow DISENGAGEMENT OF ASSOCIATED MODE ON THE VERTICAL AXIS

This reversion is due to the integration of the AP, FD, and A/THR with the FMS. When the flight crew defines a F-PLN, the FMS considers this F-PLN as a whole (lateral + vertical). Therefore, the AP will guide the aircraft along the entire F-


PLN:

- Along the LAT F-PLN (NAV – APP NAV modes)
- Along the VERT F-PLN (CLB – DES – FINAL modes).

Vertical managed modes can only be used, if the lateral managed NAV mode is used. If the flight crew decides to divert from the lateral F-PLN, the autopilot will no longer guide the aircraft along the vertical F-PLN.


Therefore, in climb:

Lateral mode change and vertical mode reversion



In descent:

Lateral mode change and vertical mode reversion

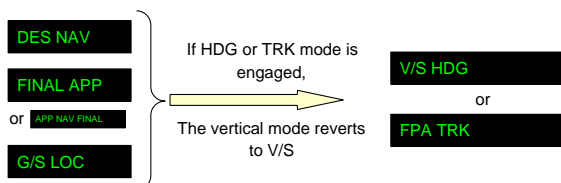

This reversion to V/S (FPA) mode on the current V/S target does not modify the pitch behavior of the aircraft. It is the flight crew's responsibility to adapt pitch, if necessary.


THE AIRCRAFT ENTERS A F-PLN DISCONTINUITY

NAV mode is lost, when entering a F-PLN discontinuity. On the lateral axis, the aircraft reverts to HDG (or TRK) mode. On the vertical axis, the same reversion (as the one indicated above) occurs.

THE PF MANUALLY FLIES THE AIRCRAFT WITH THE FD ON, AND DOES NOT FOLLOW THE FD PITCH ORDERS

If the flight crew does not follow the FD pitch orders, an A/THR mode reversion occurs. This reversion is effective, when the A/THR is in THRUST MODE (THR IDLE, THR CLB), and the aircraft reaches the limits of the speed envelope (VLS, VMAX):

reversion to speed mode

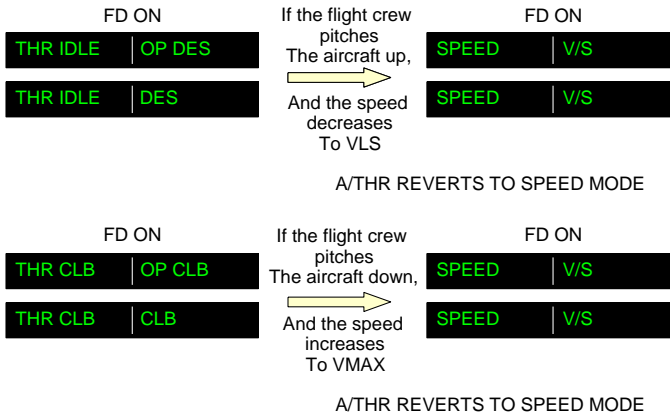

AP, FD, A/THR MODE CHANGES AND REVERSIONS

Ident.: OP-030-00005437.0002001 / 26 MAR 08
Applicable to: MSN 1320-2180

INTRODUCTION

The flight crew manually engages the modes.
However, they may change automatically, depending on the:


- AP, FD, and A/THR system integration
- Logical sequence of modes
- So-called "mode reversions".

AP, FD, ATHR SYSTEM INTEGRATION

There is a direct relationship between aircraft pitch control, and engine thrust control.
This relationship is designed to manage the aircraft's energy.

- If the AP/FD pitch mode controls a vertical trajectory (e.g. ALT, V/S, FPA, G/S):
A/THR controls speed
- If the AP/FD pitch mode controls a speed (e.g. OP CLB, OP DES):
A/THR controls thrust (THR CLB, THR IDLE)
- If no AP/FD pitch mode is engaged (i.e. AP is off and FD is off):
A/THR controls speed

Therefore, any change in the AP/FD pitch mode is associated with a change in the

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY AP / FD / ATHR
---	---

A/THR mode.


Note: For this reason, the FMA displays the A/THR mode and the AP/FD vertical mode columns next to each other.

THE LOGICAL SEQUENCE OF MODES

In climb, when the flight crew selects a climb mode, they usually define an altitude target, and expect the aircraft to capture and track this altitude. Therefore, when the flight crew selects a climb mode, the next logical mode is automatically armed.

For example:


AP/FD mode capture and tracking (1)



The flight crew may also manually arm a mode in advance, so that the AP/FD intercepts a defined trajectory.

Typically, the flight crew may arm NAV, LOC-G/S, and APPNAV-FINAL. When the capture or tracking conditions occur, the mode will change sequentially.

AP/FD mode capture and tracking (2)

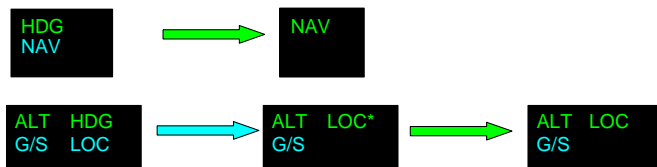

These logical mode changes occur, when the modes are armed. They appear in blue on the FMA.

MODE REVERSIONS

GENERAL

Mode reversions are automatic mode changes that unexpectedly occur, but are designed to ensure coherent AP, FD, and A/THR operations, in conjunction with flight crew input (or when entering a F-PLN discontinuity).

For example, a reversion will occur, when the flight crew:


- Changes the FCU ALT target in specific conditions

- Engages a mode on one axis, that will automatically disengage the associated mode on the other axis
- Manually flies the aircraft with the FD on, but does not follow the FD orders, which leads to the aircraft to the limits of the flight envelope.

Due to the unexpected nature of their occurrence, the FMA should be closely-monitored for mode reversions.

FLIGHT CREW CHANGE OF FCU ALT TARGET ^u ACTIVE VERTICAL MODE NOT POSSIBLE

FCU change resulting reversion to VS mode



This reversion to the V/S (FPA) mode on the current V/S target does not modify the pitch behaviour of the aircraft.

It is the flight crew's responsibility to change it as required.

FLIGHT CREW HDG OR TRK MODE ENGAGEMENT ^u DISENGAGEMENT OF ASSOCIATED MODE ON THE VERTICAL AXIS

This reversion is due to the integration of the AP, FD, and A/THR with the FMS. When the flight crew defines a F-PLN, the FMS considers this F-PLN as a whole (lateral + vertical).


Therefore, the AP will guide the aircraft along the entire F-PLN:

- Along the LAT F-PLN (NAV – APP NAV modes)
- Along the VERT F-PLN (CLB – DES – FINAL modes).

Vertical managed modes can only be used, if the lateral managed NAV mode is used. If the flight crew decides to divert from the lateral F-PLN, the autopilot will no longer guide the aircraft along the vertical F-PLN.


Therefore, in climb:

Lateral mode change and vertical mode reversion



In descent:

Lateral mode change and vertical mode reversion

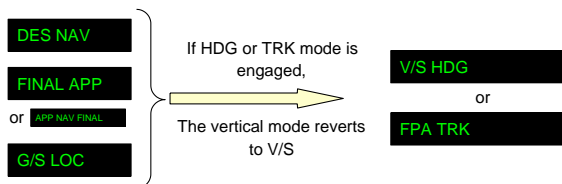

This reversion to V/S (FPA) mode on the current V/S target does not modify the pitch behavior of the aircraft. It is the flight crew's responsibility to adapt pitch, if necessary.


THE AIRCRAFT ENTERS A F-PLN DISCONTINUITY

NAV mode is lost, when entering a F-PLN discontinuity. On the lateral axis, the aircraft reverts to HDG (or TRK) mode. On the vertical axis, the same reversion (as the one indicated above) occurs.

THE PF MANUALLY FLIES THE AIRCRAFT WITH THE FD ON, AND DOES NOT FOLLOW THE FD PITCH ORDERS

If the flight crew does not follow the FD pitch orders, an A/THR mode reversion occurs. This reversion is effective, when the A/THR is in THRUST MODE (THR IDLE, THR CLB), and the aircraft reaches the limits of the speed envelope (VLS, VMAX):

Reversion to speed mode

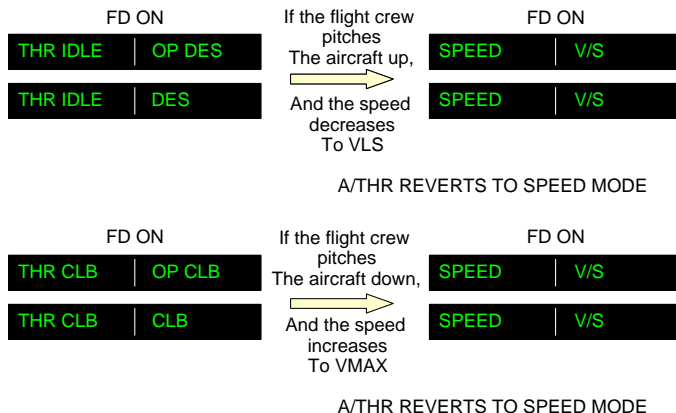

A/THR in SPEED mode automatically readjusts thrust to regain the target speed.
The FD bars will disappear, because they are not being followed by the PF.

TRIPLE CLICK

Ident.: OP-030-00005438.0001001 / 26 MAR 08
Applicable to: MSN 2180

The "triple click" is an aural alert. It is an attention-getter, designed to draw the flight crew's attention to the FMA.

The PFD FMA highlights a mode change or reversion with a white box around the new mode, and the pulsing of its associated FD bar.

The reversions, described in the previous paragraph, are also emphasized via the triple click aural alert.

Note: The triple click also appears in the following, less usual, cases:

- SRS ^u CLB (OPCLB) reversion: If, the flight crew selects a speed on the FCU
- The V/S selection is "refused" during ALT *: The flight crew pulls the V/S knob, while in ALT*
- The V/S target is not followed, because the selected target is too high, and leads to VMIN/VMAX.

PURPOSE OF THE ECAM

Ident.: OP-040-00005443.0001001 / 09 JUN 08

Applicable to: ALL

The Electronic Centralized Aircraft Monitoring (ECAM) system is a main component of Airbus' two-crewmember cockpit, which also takes the "dark cockpit" and "forward-facing crew" philosophies into account.

The purpose of the ECAM is to:

- Display aircraft system information
- Monitor aircraft systems
- Indicate required flight crew actions, in most normal, abnormal and emergency situations.

As the ECAM is available in most failure situations, it is a significant step in the direction towards a paperless cockpit and the reduction of memory items.

MAIN PRINCIPLES

Ident.: OP-040-00005444.0001001 / 02 JUN 08

Applicable to: ALL

INFORMATION PROVIDED WHEN NEEDED

One of the main advantages of the ECAM is that it displays applicable information to the flight crew, on an "as needed" basis. The following outlines the ECAM's operating modes:

- **Normal Mode:**
Automatically displays systems and memos, in accordance with the flight phase.
- **Failure Mode:**
Automatically displays the appropriate emergency/abnormal procedures, in addition to their associated system synoptic.
- **Advisory Mode:**
Automatically displays the appropriate system synoptic, associated with a drifting parameter.
- **Manual Mode:**
Enables the flight crew to manually select any system synoptic via the ECAM Control Panel (ECP).

Most warnings and cautions are inhibited during critical phases of flight (T/O INHIBIT – LDG INHIBIT), because most system failures will not affect the aircraft's ability to continue a takeoff or landing.

FAILURE LEVELS

The ECAM has three levels of warnings and cautions. Each level is based on the associated operational consequence(s) of the failure. Failures will appear in a specific color, according to a defined color-coding system, that advises the flight crew of the urgency of a situation in an instinctive, unambiguous manner. In addition, Level 2 and 3 failures are accompanied by a specific aural warning: A Continuous Repetitive Chime (CRC) indicates a Level 3 failure, and a Single Chime (SC) indicates a Level 2 failure.

Failure Level	Priority	Color Coding	Aural Warning	Recommended Crew Action
Level 3	Safety	Red	CRC	Immediate
Level 2	Abnormal	Amber	SC	Awareness, then action
Level 1	Degradation	Amber	None	Awareness, then Monitoring

When there are several failures, the FWC displays them on the Engine Warning Display (E/WD) in an order of priority, determined by the severity of the operational consequences. This ensures that the flight crew sees the most important failures first.

FEEDBACK

The ECAM provides the flight crew with feedback, after action is taken on affected controls:

- **The System Synoptic:**

Displays the status change of affected components.

- **The Memo:**

Displays the status of a number of systems selected by the flight crew (e.g. anti ice).

- **The Procedures:**

When the flight crew performs a required action on the cockpit panel, the ECAM usually clears the applicable line of the checklist (except for some systems or actions, for which feedback is not available).

The ECAM reacts to both failures and pilot action.

ECAM HANDLING


Ident.: OP-040-00005445.0001001 / 26 JUN 08

Applicable to: ALL

Task sharing is essential to effective ECAM operation, particularly in the case of abnormal operations.

NORMAL OPERATIONS

On ground, the ECAM MEMO is reviewed for feedback on temporarily-selected items

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY ECAM
---	--

(e.g. SEAT BELTS/IGNITION/ENG A/I), and to check whether IRs are aligned. If alignment is not complete, the time remaining will be displayed. It is, therefore, not necessary to refer to the OVHD panel.

In cruise, the main systems should periodically be reviewed during flight (ENG, BLEED, ELEC AC/DC, HYD, FUEL, F/CTL), to ensure that they are operating normally, and to detect any potential problem in advance.

The ECAM MEMO must be included in the instrument review. In cruise, in most of the cases, it should be blank. It helps to make the flight crew aware of any system that a flight crewmember temporarily selected, but forgot to deselect.

A STS label, displayed at the bottom of the E/WD, indicates that there is a STATUS to be reviewed. Therefore, when a C/L calls for STATUS review, press STS, only if the label appears.

If there is a STS at engine shutdown, it will pulse at the bottom of the E/WD. If this is the case, the STATUS page should be reviewed for help in completing the technical log.

ADVISORY MODE

The flight crewmember that first notices an advisory announces: "ADVISORY on XYZ system". Then, the PF requests the PNF to review the drifting parameter. If time permits, the PNF may refer to the QRH non normal procedures section, containing recommended actions in various advisory situations.

FAILURE MODE

TASK SHARING RULES

When the ECAM displays a warning or a caution, the first priority is to ensure that a safe flight path is maintained. The successful outcome of any ECAM procedure depends on: Correct reading and application of the procedure, effective task sharing, and conscious monitoring and crosschecking.

It is important to remember that, after ECAM ACTIONS announcement by the PF:

- The PF's task is to fly the aircraft, navigate, and communicate.
- The PNF's task is to manage the failure, on PF command.

The PF usually remains the PF for the entire flight, unless the Captain decides to take control.

The PF will then control the aircraft's flight path, speed, configuration, and engines. The PF will also manage navigation and communication, and initiate the ECAM actions to be performed by the PNF, and check that the actions are completed correctly.

The PNF has a considerable workload: Managing ECAM actions and assisting the PF on request. The PNF reads the ECAM and checklist, performs ECAM actions on


PF command, requests PF confirmation to clear actions, and performs actions required by the PF. The PNF never touches the thrust levers, even if requested by the ECAM.

Some selectors or pushbuttons (including the ENG MASTER switch, FIRE pushbutton, IR, IDG and, in general, all guarded switches) must be completely crosschecked by both the PF and PNF, before they are moved or selected, to prevent the flight crew from inadvertently performing irreversible actions.

To avoid mistakes in identifying the switches, Airbus' overhead panels are designed to be uncluttered. When the ECAM requires action on overhead panel pushbuttons or switches, the correct system panel can be identified by referring to the white name of the system on the side of each panel. Before performing any action, the PNF should keep this sequence in mind: "System, then procedure/selector, then action" (e.g. "air, crossbleed, close"). This approach, and announcing an intended selection before action, enables the PNF to keep the PF aware of the progress of the procedure.

It is important to remember that, if a system fails, the associated FAULT light on the system pushbutton (located on the overhead panel) will come on in amber, and enable correct identification.

When selecting a system switch or pushbutton, the PNF should check the SD to verify that the selected action has occurred (e.g. closing the crossbleed valve should change the indications that appear on the SD).

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY ECAM
---	--

Crew Coordination

PF	PNF
<div style="border: 1px solid black; padding: 5px; text-align: center;"> First pilot who notices: MASTER CAUTION/MASTER WARNING.... RESET ANNOUNCE "TITLE OF FAILURE" </div>	
FLY THE AIRCRAFT ORDER ECAM ACTIONS (2)	ECAM CONFIRM (1)
(3) ECAM ACTIONS COMPLETE .. CHECK CONFIRM CLEAR	ECAM ACTIONS / OEB .. PERFORM REQUEST .. CLEAR "name of SYS"? ECAM CLEAR
(4) CONFIRM CLEAR	SYSTEM PAGE ANALYSE REQUEST .. CLEAR "name of SYS"? SYSTEM DISPLAY CLEAR
CONFIRM STATUS (5) CONFIRM REMOVE STATUS	ANNOUNCE STATUS? STATUS READ REQUEST REMOVE STATUS? STATUS REMOVE (6) ANNOUNCE ECAM ACTIONS COMPLETED
<div style="border: 1px solid black; padding: 5px; text-align: center;"> SITUATION ASSESSEMENT/DECISION </div>	

1. The PNF should review the overhead panel and/or associated SD to analyze and confirm the failure, prior to taking any action, and should bear in mind that the sensors used for the SD may be different from the sensors that trigger the failure.
2. In case of a failure during takeoff or go-around, ECAM actions should be delayed until the aircraft reaches approximately 400 ft, and is stabilized on a safe trajectory. This is an appropriate compromise between stabilizing the aircraft and delaying action.


3. When the ECAM displays several failures, the sequence (action, then request and confirmation, before clearance) should be repeated for each failure. When all necessary actions are completed, amber messages and red titles will no longer appear on the E/WD.
4. When the ECAM displays several system pages, the sequence (request and confirmation before clearance) should be repeated for each system page.
5. The PF may call out "STOP ECAM" at any time, if other specific actions must be performed (normal C/L, or performing a computer reset). When the action is completed, the PF must call out: "CONTINUE ECAM".
6. When slats are extended, the SD automatically displays the STATUS, unless if the page is empty. The STS should be carefully reviewed, and the required procedure applied.
7. When ECAM actions have been completed, and the ECAM status has been reviewed, the PNF may refer to the FCOM procedure for supplementary information, if time permits. However, in critical situations the flight should not be prolonged only to consult the FCOM.

IF THE ECAM WARNING (OR CAUTION) DISAPPEARS WHILE APPLYING THE PROCEDURE

If an ECAM warning disappears, while a procedure is being applied, the warning can be considered no longer applicable. Application of the procedure can be stopped. For example, during the application of an engine fire procedure, if the fire is successfully extinguished with the first fire extinguisher bottle, the ENG FIRE warning disappears, and the procedure no longer applies. Any remaining ECAM procedures should be performed as usual.

SOME ADDITIONAL REMARKS

- There are very few memory items:
 - Emergency descent initiation
 - Immediate actions, in case of an unreliable speed indication
 - Loss of braking
 - Windshear (reactive and predictive)
 - EGPWS and GPWS
 - TCAS

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	OPERATIONAL PHILOSOPHY ECAM
---	--

- LAND ASAP (As Soon As Possible):
 - RED LAND ASAP :
Land as soon as possible at the nearest suitable airport at which a safe approach and landing can be made.
 - AMBER LAND ASAP:
Advice to the flight crew to consider landing at the nearest suitable airport.

Note: The **CLOSEST AIRPORTS MCDU** page may help the flight crew to determine the nearest suitable airport: This page displays the four airports that are the nearest to the aircraft's current position. These airports are found in the navigation database, and are displayed regardless of their suitability. The flight crew should keep in mind that the four closest airports are sorted according to distance, and should refer to the Estimated Time of Arrival (ETA).

- OEB Reminder
Some Operational Engineering Bulletins (OEBs) contain information that may impact flight crew action, in the event of a system failure. OEBs are filed in the QRH.
If the OEB reminder function is activated for an ECAM warning/caution, the ECAM will display the : "Refer to QRH Proc" line, when necessary. This line may appear instead of the procedure, or it may be added to the ECAM STATUS.
In such failure cases, the flight crew should refer to the applicable procedure in the QRH.
- Some procedures require reference to the QRH

IN CASE OF AN ECAM SYSTEM FAULT

DISPLAY UNIT FAILURE

If one ECAM screen fails, the remaining one will display the E/WD. However, in such a case, if a failure or advisory occurs, the system or status page are not displayed automatically. The PNF can display a system synoptic on the remaining display unit, by pressing the assigned system pushbutton on the ECP. The synoptic will appear, as long as the pushbutton is pressed.

Therefore, in the case of an advisory and/or failure (indicated by an ADV flag that pulses in white on the bottom of the E/WD), the PNF must call up the affected system synoptic, by pressing the related pushbutton.

To review two or three pages of status messages: The PNF should release the STS pushbutton for less than two seconds, then press and hold it again.

A double ECAM screen configuration can be recovered using the ECAM/ND

switching selector:

- If the Captain is the PNF, the switch should be set to "CPT".
- If the First Officer is the PNF, the switch should be set to "F/O".

The applicable ND screen will then display the second ECAM image.

DMC FAILURES

In case all of the ECAM DMC channels fail, each flight crewmember may display the engine standby page on their respective ND (generated by the DMCs' EFIS channel).

ECP FAILURE

In the case of an ECP failure, the CLR, RCL, STS, ALL and EMER CANCEL keys will continue to operate, because they are hardwired to the FWC/DMC. Therefore, the "ALL" key can be used to scroll all SD pages and display the desired one (by releasing the key, when the desired SD page appears).

FLUCTUATING CAUTION

Any fluctuating caution can be deleted with the EMER CANCEL pushbutton. When pressed, the EMER CANCEL pushbutton deletes both the aural alert, and the caution for the remainder of the flight. This is indicated on the STATUS page, by the "CANCELLED CAUTION" title. Any caution messages that have been inhibited via the EMER CANCEL pushbutton can be recalled by pressing and holding the RCL key for more than three seconds.

The EMER CANCEL pushbutton inhibits any aural warning that is associated with a red warning, but does not affect the warning itself.

USE OF SUMMARIES

Ident.: OP-040-00005446.0001001 / 26 MAR 08

Applicable to: ALL

GENERAL

Summaries consist of QRH procedures, and are designed to assist the flight crew to manage applicable actions, in the event of an EMER ELEC CONFIG or a dual hydraulic failure.

In any case, **ECAM actions should be applied first** (actions and STATUS review). The PNF should refer to the applicable QRH summary, only after announcing: "ECAM ACTIONS COMPLETED".

When a failure occurs, and after performing the ECAM actions, the PNF should refer to the "CRUISE" section of the summary, to determine the landing distance

coefficient. Due to the fact that normal landing distances also appear on this page, the PNF can compute the landing distance with the failure, **and decide whether or not to divert**.

APPROACH PREPARATION

As usual, approach preparation includes a review of the ECAM STATUS.

After reviewing the STATUS, the PNF should refer to the "CRUISE" section of the summary, to determine the VREF correction, and compute the VAPP.

This assumes that the PNF is aware of the computation method, and uses the VREF displayed on the MCDU (with the updated destination). The summary provides a VREF table, in the event that failure results in the loss of the MCDU.

The LANDING and GO-AROUND sections of the summary should be used for the **approach briefing**.


APPROACH

To perform the APPR PROC, the APPROACH section of the summary should be read (mainly because of the flap extension procedure, that does not entirely appear on the ECAM).

This assumes that the recommendations, provided in this part of the summary are sufficient for understanding, and that it will not be necessary for the flight crew to consult the "LANDING WITH FLAPS (SLATS) JAMMED" paper procedure.

The PNF should then review the ECAM STATUS, and check that all the APPR PROC actions have been completed.

sequence






A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

OPERATIONAL PHILOSOPHY
ECAM

Intentionally left blank

NORMAL OPERATIONS

Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRELIMINARY PAGES TABLE OF CONTENTS
---	---

NO-PLP. PRELIMINARY PAGES

TABLE OF CONTENTS	1/6
-------------------------	-----

NO-010. GENERAL

INTRODUCTION	1/4
USE OF NORMAL CHECK LIST	1/4
COMMUNICATION	2/4

NO-020. PRE START


MEL	1/20
HANDLING OF MAINTENANCE MESSAGES ON ECAM STATUS PAGE	3/20
SECURED AND TRANSIT STOP	3/20
SAFETY EXTERIOR INSPECTION	4/20
PRELIMINARY COCKPIT PREPARATION	4/20
EXTERIOR INSPECTION	5/20
ADIRS INITIALIZATION	6/20
COCKPIT PREPARATION	7/20
MISCELLANEOUS	20/20

NO-030. START

ENGINE AUTO START	1/4
average idle engine parameters	2/4
ENGINE START MALFUNCTION	2/4
MANUAL ENGINE START	2/4
TAILPIPE FIRE	3/4
ENGINES WARM UP PERIOD	3/4
After Start Flow Pattern	3/4

NO-040. TAXI

POWERPUSH	1/10
TAXI ROLL AND STEERING	1/10
figures	4/10
BRAKE CHECK	5/10
CARBON BRAKE WEAR	5/10
TAXI SPEED AND BRAKING	5/10
BRAKE TEMPERATURE	6/10
BRAKING ANOMALIES	6/10
Brake Fans r	7/10
FLIGHT CONTROL CHECK	7/10
Takeoff Briefing Confirmation	8/10
TAXI WITH ONE ENGINE SHUTDOWN	8/10
MISCELLANEOUS	9/10

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRELIMINARY PAGES TABLE OF CONTENTS
--	--

TAXI FLOW PATTERN	10/10
-------------------------	-------

NO-050. TAKEOFF


THRUST SETTING	1/10
TAKEOFF ROLL	1/10
TYPICAL AIRCRAFT ATTITUDE AT TAKEOFF AFTER LIFT-OFF	2/10
ROTATION	2/10
AIRCRAFT GEOMETRY.....	3/10
TAIL STRIKE AVOIDANCE.....	3/10
MAXIMUM DEMONSTRATED CROSSWIND FOR TAKE-OFF	5/10
AP ENGAGEMENT	5/10
VERTICAL PROFILE	6/10
LATERAL PROFILE	6/10
THRUST REDUCTION ALTITUDE.....	6/10
ACCELERATION ALTITUDE	7/10
TAKE-OFF AT HEAVY WEIGHT	7/10
IMMEDIATE TURN AFTER TAKE-OFF	8/10
LOW ALTITUDE LEVEL-OFF	8/10
NOISE ABATEMENT TAKE-OFF	8/10

NO-060. CLIMB

GENERAL.....	1/6
AP/FD CLIMB MODES	1/6
AP/FD CLIMB MODES	3/6
SPEED CONSIDERATIONS.....	4/6
VERTICAL PERFORMANCE PREDICTIONS.....	5/6
LATERAL NAVIGATION	5/6
10 000 ft FLOW PATTERN	6/6

NO-070. CRUISE

PREFACE.....	1/14
FMS USE.....	1/14
FMS USE: MISCELLANEOUS.....	4/14
COST INDEX	4/14
SPEED CONSIDERATIONS.....	5/14
ALTITUDE CONSIDERATIONS	6/14
STEP CLIMB.....	6/14
EFFECT OF ALTITUDE ON FUEL CONSUMPTION	9/14
FUEL MONITORING	9/14
FUEL TEMPERATURE	10/14
APPROACH PREPARATION	10/14
APPROACH BRIEFING	12/14

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRELIMINARY PAGES TABLE OF CONTENTS
---	--

NO-080. DESCENT

PREFACE	1/8
COMPUTATION PRINCIPLES	1/8
GUIDANCE AND MONITORING	2/8
MODE REVERSION	6/8
MODE REVERSION	6/8
DESCENT CONSTRAINTS.....	6/8
10 000 ft FLOW PATTERN	8/8

NO-090. HOLDING

PREFACE	1/2
HOLDING SPEED AND CONFIGURATION	1/2
IN THE HOLDING PATTERN	1/2

NO-100. APPROACH GENERAL

PREFACE	1/16
INITIAL APPROACH.....	1/16
INTERMEDIATE APPROACH.....	5/16
FINAL APPROACH	8/16
VAPP	10/16
GROUND SPEED MINI	11/16

NO-110. ILS APPROACH

PREFACE	1/6
INITIAL APPROACH.....	1/6
INTERMEDIATE APPROACH.....	2/6
FINAL APPROACH	2/6
ILS RAW DATA	4/6

NO-120. NON PRECISION APPROACH

PREFACE	1/10
APPROACH STRATEGY.....	1/10
LIMITATIONS	1/10
INITIAL APPROACH.....	2/10
INTERMEDIATE APPROACH.....	3/10
FINAL APPROACH	7/10
REACHING THE MINIMA	8/10
LOC ONLY APPROACH.....	8/10
LOC BACK COURSE APPROACH	9/10

NO-130. CIRCLING APPROACH

PREFACE	1/4
APPROACH PREPARATION	1/4

FINAL INSTRUMENT APPROACH	2/4
CIRCLING APPROACH	2/4

NO-140. VISUAL APPROACH

INITIAL APPROACH	1/4
INTERMEDIATE/FINAL APPROACH	2/4

NO-150. PRECISION APPROACH

GENERAL	1/8
DEFINITION	1/8
FLIGHT PREPARATION	2/8
APPROACH PREPARATION	3/8
APPROACH PROCEDURE	5/8
FAILURE AND ASSOCIATED ACTIONS	7/8
AUTOLAND IN CAT 1 OR BETTER WEATHER CONDITIONS	7/8

NO-160. LANDING


PREFACE	1/12
MAIN GEAR CLEARANCE	1/12
FLARE	2/12
MAXIMUM DEMONSTRATED CROSSWIND FOR LANDING	3/12
CALL OUT	3/12
DEROTATION	4/12
ROLL OUT	4/12
BRAKING	5/12
FACTORS AFFECTING LANDING DISTANCE	8/12
CLEARANCE AT TOUCH DOWN	10/12
TAIL STRIKE AVOIDANCE	10/12

NO-170. GO AROUND

PREFACE	1/6
CONSIDERATIONS ABOUT GO-AROUND	1/6
AP/FD GO-AROUND PHASE ACTIVATION	1/6
GO-AROUND PHASE	2/6
ENGINES ACCELERATION	3/6
LEAVING THE GO-AROUND PHASE	4/6
REJECTED LANDING	5/6

NO-180. TAXI IN

BRAKE FANS r	1/4
BRAKE TEMPERATURE	1/4
ENGINES COOLING PERIOD	2/4
TAXI WITH ONE ENGINE SHUTDOWN	2/4

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRELIMINARY PAGES TABLE OF CONTENTS
---	---

AFTER LANDING FLOW PATTERN	3/4
----------------------------------	-----



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

PRELIMINARY PAGES

TABLE OF CONTENTS

Intentionally left blank

INTRODUCTION

Ident.: NO-010-00005440.0001001 / 26 MAR 08

Applicable to: ALL

The NORMAL OPERATIONS Chapter outlines the techniques that should be applied for each flight phase, in order to optimize the use of Airbus aircraft. This chapter must be read in parallel with the FCOM, which provides normal procedures, and their associated tasksharing, callouts, and checklists.

All of these flying techniques are applicable to normal conditions.

Other techniques applicable to adverse weather conditions, *Refer to SI-010 GENERAL*.

There are flow patterns at the end of some flight phases to indicate where the actions are to be performed. All flight crewmembers must apply the flow patterns, to ensure that the flight crew performs the actions necessary for a specific flight phase, before completing an applicable checklist.

USE OF NORMAL CHECK LIST

Ident.: NO-010-00005441.0001001 / 27 JUN 08

Applicable to: ALL

Airbus' NORMAL CHECKLIST takes into account ECAM information, and includes only those items that can directly impact flight safety and efficiency, if actions are not correctly performed. These checklists are of a "non-action" type (i.e. all actions should be completed from memory before the flight crew performs the checklist).

The NORMAL CHECKLIST includes 9 flight phases. The BEFORE START, BEFORE TAKEOFF, and AFTER TAKEOFF checklists are divided in two sections: The "Down to the Line" section, and the "Below the Line" section. This format is designed to help flight crews to manage the workload.

For example, the "BEFORE START - Down to the Line" checklist may be called out, as soon as the Load and Trim Sheet is available and takeoff data is set. On the other hand, the "BEFORE START - Below the Line" checklist may be called out after obtaining start-up clearance.

The Pilot Flying (PF) requests the NORMAL CHECKLIST, and the Pilot Non Flying (PNF) reads it. The checklist actions are referred to as "challenge/response"-type actions. The PF "responds" to the "challenge" only after checking the current status of the aircraft.

If the configuration does not correspond to the checklist response, the PF must take corrective action before "responding" to the "challenge". If corrective action is not possible, then the PF must modify the response to reflect the real situation (with a specific answer). When necessary, the other flight crewmember must crosscheck the

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS GENERAL
--	--

validity of the response. The challenger (PNF) waits for a response before proceeding with the checklist. For the checklist items that are identified as "AS RQRD", the response should correspond to the real condition or configuration of the system. The PNF must announce "LANDING CHECKLIST COMPLETED", after reading and completing the checklist.

COMMUNICATION
Ident.: NO-010-00005442.0001001 / 26 MAR 08 Applicable to: ALL

EMERGENCY CALL


Some abnormal/emergency procedures require flight and cabin crews to use specific phraseology when communicating with each other. To ensure effective communication between the flight and cabin crews, the standard phraseology may be recalled at the preflight phase.

FROM	TO	PHRASEOLOGY	REMARKS
cockpit	cabin	Passenger Address (PA) System: "PURSER TO COCKPIT, PLEASE!"	The Purser, or any other cabin crewmember, must go to the cockpit
Cockpit	Cabin	Passenger Address (PA) System: "ATTENTION CREW! AT STATIONS!"	An emergency evacuation may soon be required.
cockpit	cabin	Passenger Address (PA) System: "CABIN CREW and PASSENGERS REMAIN SEATED!"	The captain decides that an evacuation is not required
cockpit	cabin	Passenger Address (PA) System: "PASSENGERS EVACUATE!"	The captain orders an immediate evacuation
cabin	cockpit	Interphone: "PRIO CAPT"	Any crew member can make such a call. The flight crew must reply.

CROSS-COCKPIT COMMUNICATION

The term "cross-cockpit communication" refers to communication between the PF and the PNF. This communication is vital for any flight crew. Each time one flight crewmember adjusts or changes information and/or equipment on the flight deck, the other flight crewmember must be notified, and an acknowledgement must be obtained. Such adjustments and changes include:

- FMGS alterations
- Changes in speed or Mach
- Tuning navigation aids

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	<p style="text-align: center;">NORMAL OPERATIONS</p> <p style="text-align: center;">GENERAL</p>
---	---

- Flight path modifications
- System selections (e.g. anti-ice system).

When using cross-cockpit communication, standard phraseology is essential to ensure effective flight crew communication. This phraseology should be concise and exact, and is defined in the FCOM (*Refer to FCOM/PRO-NOR-SOP-27 COMMUNICATIONS AND STANDARD TERMS*).

The flight crew must use the headset:

- From the ENGINE START phase until the TOP OF CLIMB phase
- From The TOP OF DESCENT phase until the aircraft is parked.

STERILE COCKPIT RULE

When the aircraft is below 10 000 ft, any conversation that is not essential should be avoided: This includes conversations that take place in the cockpit, or between the flight and cabin crewmembers. It is important to adhere to this policy, in order to facilitate communication between both of the flight crew, and to ensure the effective communication of emergency or safety-related information, between flight and cabin crew members.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

GENERAL

Intentionally left blank

MEL

Ident.: NO-020-00005447.0001001 / 11 JUN 08

Applicable to: ALL

GENERAL

The Master Minimum Equipment List (MMEL) is published by the aircraft manufacturer. It is a certified document that enables an aircraft to be dispatched, with some equipment, or functions inoperative. Some limitations, operational procedures and/or maintenance procedures may have to be performed. The Minimum Equipment List (MEL) is published by the operator, and approved by local authorities. It must be at least as restrictive as MMEL. The MMEL cannot be used to replace the MEL. Aircraft can be dispatched with one, or more, secondary airframe part/parts missing. In this case, the flight crew must refer to the Configuration Deviation List (CDL), in the Aircraft Flight Manual.

MMEL PHILOSOPHY

To introduce an item in the MMEL, the manufacturer must demonstrate first that the consequences of the system failure are no more than minor on the flight. The manufacturer must demonstrate then, that the next critical failure, i.e. the failure that has the most critical effect on aircraft operation when added to the initial failure, maintains the level of safety.

In some cases, this level of safety is maintained provided (o) or (m) procedures are observed.

As an example, the aircraft dispatch with one pack inoperative induces a flight level limitation whereas a pack failure in flight does not induce a flight level limitation.

ATA 100 FORMAT

All items/equipment listed in the MEL are identified using the Air Transport Association (ATA) format. The ATA is the official reference for the classification of aircraft systems and/or functions. The aircraft systems/functions are classified with six digits.

For example, 21-52-01 refers to:

21: ATA 21: Air conditioning

52: Air-cooling system

01: Air conditioning pack

MEL DESCRIPTION

The MEL has four parts:

- ECAM warnings/ MEL entry

- List of items that may be inoperative for dispatch
- Associated operational procedures
- Associated maintenance procedures

MEL OPERATIONAL USE

The MEL usually applies to revenue flights, and should be consulted before taxi out. If a failure occurs during taxi out, and before the take off roll starts, the decision to continue the flight is subject to pilot judgment and good airmanship. The Captain may consult the MEL before deciding to continue the flight (particularly if the failure has an effect on the takeoff performance).

During preliminary cockpit preparation, the flight crew must press the RCL P/B, for at least 3 s, in order to recall any previous cautions or warnings that have been cleared or cancelled. The flight crew should consult the technical logbook to confirm that the indications are compatible with the MEL.

A failure may occur if a Circuit Breaker (C/B) disengages. When on ground, do not re-engage any fuel pump C/Bs. The flight crew may re-engage any other tripped C/Bs, provided that the action is coordinated with the maintenance team, and the cause of the tripped C/B is identified.

The MEL section 0 is called ECAM Warnings/MEL Entry. The purpose of this section is to help the flight crew to determine the MEL entry point, when an ECAM caution/warning message triggers. The ECAM Warnings/MEL Entry section provides the relationship between the ECAM caution/warnings, and MEL items, if applicable. If a failed item does not appear in the MEL, it is not possible to dispatch the aircraft. However, items that do not affect the airworthiness of the aircraft, such as galley equipment, entertainment systems, or passenger convenience items, do not appear in the MEL: The dispatch applicability of these items is not relevant to the MEL. In most cases, if the failed item appears in the MEL, the dispatch of the aircraft is authorized, provided that all dispatch conditions are fulfilled:

- Check the rectification time interval has not expired
- Consider location and, where repair is possible
- (*) Means that an INOP placard is required
- (O) Means that a specific operational procedure or limitation is required (all listed in the MEL OPERATIONAL PROCEDURES Chapter)
- (M) Means that a specific maintenance procedure is required.

When the MEL requires both maintenance and operational procedures, the maintenance procedures must be performed before applying the operational procedures.

M MEL symbol

A318/319/320/321		MASTER MINIMUM EQUIPMENT LIST		01-22	P 7
MASTER MINIMUM EQUIPMENT LIST		AUTO FLIGHT		SEQ 001	REV 27
1. SYSTEM AND SEQUENCE NUMBERS		2. RECTIFICATION INTERVAL			
ITEM		3. NUMBER INSTALLED			
		4. NUMBER REQUIRED FOR DISPATCH			
		5. REMARKS OR EXCEPTIONS			
82-01 Multipurpose Control Display Unit (MCDU)	C	1	-	MCDU 1 or MCDU 2 must be operative.	
83-01 FMGC	C	2	1	Except for ER operations, one may be inoperative. Refer to 22-10-01, and Refer to 22-10-02, and Refer to 22-72-01.	
83-02 FMA Indication on PFD AI AP related indication	C	1	-	a) One or more indications may be imperative on one FMA.	
	C	-	-	- or -	
	C	-	-	b) Except for ER operations, one or	

These symbols indicate requirements for a specific procedure:

- (m) maintenance,
- (o) operational,
- (*) requires a placard in the cockpit.

If some items are mandatory for ETOPS dispatch, a mention "ER" (Extended Range) is added but mandatory items for CATII, CATIII operations, RNP and RVSM may be not mentioned in the MMEL. However, the MEL should include these requirements. If it is not the case,

- Mandatory items for CATII/III are available in QRH
- Mandatory items for RVSM are available in FCOM (*Refer to FCOM/PRO-SPO-50 REQUIRED EQUIPMENT/FUNCTIONS FOR RVSM*)
- Mandatory items for RNP are available in FCOM (*Refer to FCOM/PRO-SPO-51 BRNAV IN EUROPEAN AIRSPACE*)

HANDLING OF MAINTENANCE MESSAGES ON ECAM STATUS PAGE

Ident.: NO-020-00005448.0002001 / 26 MAR 08

Applicable to: ALL

Dispatch with maintenance message displayed on ECAM STATUS page is allowed without specific conditions except for:

- AIR BLEED: Refer to MEL 36-00-01.

SECURED AND TRANSIT STOP

Ident.: NO-020-00005449.0001001 / 26 MAR 08

Applicable to: ALL

If the last checklist performed by the flight crew is SECURING THE AIRCRAFT C/L,

the aircraft is in SECURED STOP. After a SECURED STOP, the flight crew must perform all items in the Standard Operations Procedure (SOP), for the next flight. If the last checklist performed by the flight crew is PARKING C/L, the aircraft is in TRANSIT STOP.

After a TRANSIT STOP, items indicated by (*), are the only steps to be completed for TRANSIT PREPARATION. i.e. PRELIMINARY COCKPIT PREPARATION, EXTERIOR INSPECTION, and COCKPIT PREPARATION.

SAFETY EXTERIOR INSPECTION

Ident.: NO-020-00005450.0001001 / 11 JUN 08

Applicable to: ALL

Safety exterior inspection is performed to ensure that the aircraft and its surroundings are safe for operations. Items that should be checked include:

- Chocks in place
- Doors status
- Ground crew present
- Aircraft environment

PRELIMINARY COCKPIT PREPARATION

Ident.: NO-020-00005451.0001001 / 25 JUN 08


Applicable to: ALL

OBJECTIVES

The objectives of the preliminary cockpit preparation are:

- To ensure that all safety checks are performed before applying electrical power:
 - The RCL pb is pressed for at least 3 s to display the cautions and warnings from the previous flight.
 - The technical logbook and MEL are checked at this stage.
- To check the liquid levels i.e. oil, hydraulic and oxygen pressure using
 - The HYD pb is pressed to check the hydraulic level
 - The ENG pb is pressed to check engine oil level (*Refer to FCOM/PRO-NOR-SOP-04-C BEFORE WALK-AROUND - ECAM*)
 - The DOOR pb is pressed, to check the oxygen pressure level
- To check the position of surface control levers e.g. slats/flaps, parking brake.

During the Preliminary Cockpit Preparation, the flight crew must also review all OEBs applicable to the aircraft. The flight crew must pay a particular attention to the red OEBs, and more particularly to the red OEBs that must be applied before the ECAM

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRE START
---	--

procedure.

OXYGEN

The ECAM S/D DOOR page displays the oxygen pressure. When the oxygen pressure is below a defined threshold, an amber half box highlights the value. This advises the flight crew that the bottle should be refilled. The flight crew should refer to the minimum flight crew oxygen pressure (*Refer to FCOM/LIM-35 COCKPIT FIXED OXYGEN SYSTEM*). The prolonged dispatch of the aircraft in such condition is not recommended.

EXTERIOR INSPECTION
Ident.: NO-020-00005452.0001001 / 11 JUN 08 Applicable to: ALL


Standard Operating Procedures (SOP) outline the various elements that the flight crew must review in greater detail. The objectives of the exterior inspection are:

- To obtain a global assessment of the aircraft status. Any missing parts or panels will be checked against the Configuration Deviation List (CDL) for possible dispatch and any potential operational consequences.
- To ensure that main aircraft surfaces are in adequate position relative to surface control levers.
- To check that there are no leaks e.g. engine drain mast, hydraulic lines.
- To check the status of the essential visible sensors i.e. AOA, pitot and static probes.
- To observe any possible abnormalities on the landing gear status:
 - Wheels and tires status (cut, wear, cracks)
 - Safety pins are removed
 - Brakes status (Brake wear pin length with parking brake ON)
 - Length of oleo. Any difference between the two main landing gears shall be reported.
- To observe any possible abnormality on the engines:
 - Fan blades, turbine exhaust, engine cowl and pylon status
 - Access door closed

ADIRS INITIALIZATION

Ident.: NO-020-00005453.0001001 / 11 JUN 08

Applicable to: ALL

**ALIGNMENT**

At the beginning of the pre-flight checks, the crew sets the ADIRS selectors to NAV, in order to start alignment.

The alignment takes approximately 10 min, and must be completed before pushback (before any aircraft movement).

IN TRANSIT:

ADIRS re-alignment is only necessary, if one of the ADIRS displays a residual ground speed greater than 5 kt.

In this case, a rapid re-alignment should be performed on all 3 IRSs (by setting all the ADIRS to OFF, then all back to ON within 5 s). The fast alignment takes approximately one minute. It involves setting the ground speed to 0, and updating the IRS position to the position of the coordinates on the INITA page (usually airport reference coordinates).

A complete re-alignment is only recommended for Long-range flights, especially if flown outside radio NAVAID coverage with Aircraft not equipped with GPS.

INITIALIZATION

The F-PLN origin airport coordinates are extracted from the FMS database. These coordinates appear on the MCDU INITA page, and are normally used for initialization. They are the airport reference coordinates.

If a high navigation performance is desired, (i.e. for long-range flights without GPS and without radio navigation updates, or if low RNP operation is expected), the crew should adjust the airport reference coordinates to the gate coordinates, provided that this data is published or available on board. In this case, the flight crew should use the slew keys successively for Latitude and Longitude, instead of inserting the coordinates on the scratchpad, (in order to avoid errors).

When performing the BEFORE START C/L, the flight crew will check that the IRS IN ALIGN ECAM MEMO no longer appears, to indicate that the ADIRS are in NAV mode.

The crew will check on the POSITION MONITOR page, that the distance between IRS and FMS position is lower than 5 nm. This will permit to detect any gross error for IRS initialization, which is not visible as long as GPS PRIMARY is available. Checking runway and SID display on the ND in comparison with the aircraft symbol representing the aircraft present position, (ARC or NAV mode, range 10 nm) during taxi, is a good way to check the global consistency of FMGS entries (Position and flight plan).

"RESET IRS TO NAV" MCDU MESSAGE

When the ADIRS are in NAV mode, and new origin airport coordinates are inserted, the RESET IRS TO NAV message triggers.

This occurs in transit, when the flight crew enters a new CO-RTE, or enters a new FROM-TO airport pair on the INIT A page, and does not re-align the ADIRS.

In this case, check the coordinates on the INITA page and compare them with:

- The coordinates of the origin airport, that are provided on the Airport chart, in order to detect a possible error in airport entry
- The ADIRS position (IRS monitor page).

In most cases the ADIRS position and the airport position do not differ significantly. Therefore, the message may be cleared without realigning the IRSs.

COCKPIT PREPARATION

Ident.: NO-020-00005454.0001001 / 27 JUN 08


Applicable to: MSN 0781-0852

FLOW PATTERN

The scan pattern varies, depending on the pilot status, i.e PF, PNF, CM1, or CM2, and the areas of responsibility:

1. Overhead panel: Extinguish any white lights
2. Center instrument panel
3. pedestal
4. FMGS preparation, and when both pilots are seated:
5. Glareshield
6. Lateral consoles and CM1/CM2 panels


Cockpit preparation flow pattern

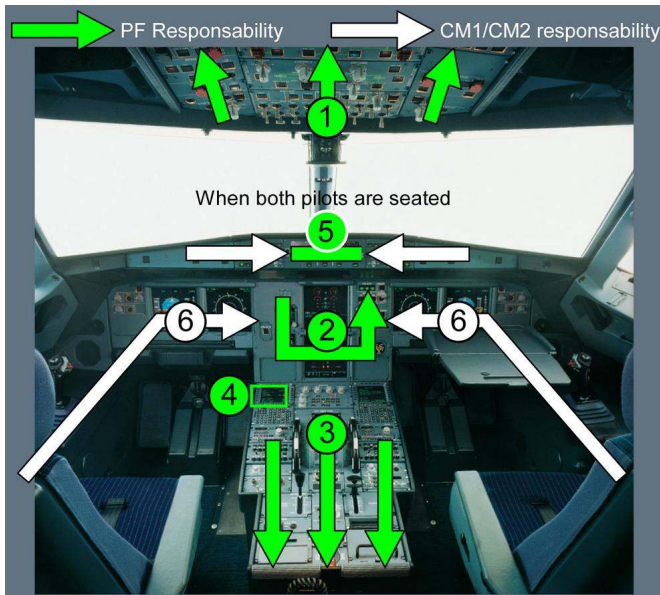

FMGS PROGRAMMING

FMGS programming involves inserting navigation data, then performance data. It is to be noted that:

- Boxed fields must be filled
- Blue fields inform the crew that entry is permitted
- Green fields are used for FMS generated data, and cannot be changed
- Magenta characters identify limits (altitude, speed or time), that FMS will attempt to meet
- Yellow characters indicate a temporary flight plan display
- Amber characters signify that the item being displayed is important and requires immediate action
- Small font signifies that data is FMS computed
- Large font signifies manually entered data.

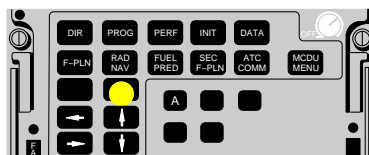

- **F-PLN**

The F-PLN A page is to be completed thoroughly including:

- The take-off runway
- SID
- Altitude and speed constraints
- Correct transition to the cruise waypoint
- Intended step climb/descents, according to the Computerized Flight Plan (CFP).

If time permits, the wind profile along the flight plan may be inserted using vertical revision through wind prompt.

The flight crew should also check the overall route distance (6th line of the F-PLN page), versus CFP distance.

- **SEC F-PLN**

The SEC F-PLN should be used to consider an alternate runway for take-off, a return to departure airfield or a routing to a take-off alternate.

- **RAD NAV**

The RAD NAV page is checked, and any required NAVAID should be manually entered using ident. If a NAVAID is reported on NOTAM as unreliable, it must be deselected on the MCDU DATA/POSITION MONITOR/SEL NAVAID page.


- **INIT B**

The flight crew:

- Inserts the expected ZFWCG/ZFW, and block fuel to initialize a F-PLN computation.
- Checks fuel figures consistent with flight preparation fuel figures.

The flight crew will update weight and CG on receipt of the load sheet.

After Engine start, the INIT B page is no longer available. The flight crew should use the FUEL PRED page for weight and fuel data insertion, if required.

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRE START
---	--

- **PERF**

The thrust reduction altitude/acceleration altitude (THR RED /ACC) are set to default at 1 500 ft, or at a value defined by airline policy. The THR RED/ACC may be changed in the PERF TAKE-OFF page, if required. The flight crew should consider the applicable noise abatement procedure.

The one-engine-out acceleration altitude must:

- Be at least 400 ft above airport altitude
- Ensure that the net flight path is 35 ft above obstacles
- Ensure that the maximum time for takeoff thrust is not exceeded.

Therefore, there are generally a minimum and a maximum one engine out acceleration altitude values. The minimum value satisfies the first two criteria. The maximum value satisfies the last one. Any value between those two may be retained.

The one engine out acceleration altitude is usually defaulted to 1 500 ft AGL and will be updated as required.

The flight crew uses the PERF CLB page to pre-select a speed. For example, "Green Dot" speed for a sharp turn after take-off.

The crew may also check on the PROG page the CRZ FL, MAX REC FL and OPT FL.


Once the FMGS has been programmed, the PNF should then cross check the information prior to the take-off briefing.

When the predictions are available, the crew may print the PREFLIGHT DATA r. This listing provides all the predictions which may be used during the initial part of the flight.

TAKE-OFF BRIEFING

The PF should perform the takeoff briefing at the gate , when the flight crew workload permits, Cockpit preparation has been completed and, before engine start. The takeoff briefing should be relevant, concise and chronological. When a main parameter is referred to by the PF, both flight crewmembers must crosscheck that the parameter has been set or programmed correctly. The takeoff briefing covers the following:

Take off briefing with associated checks

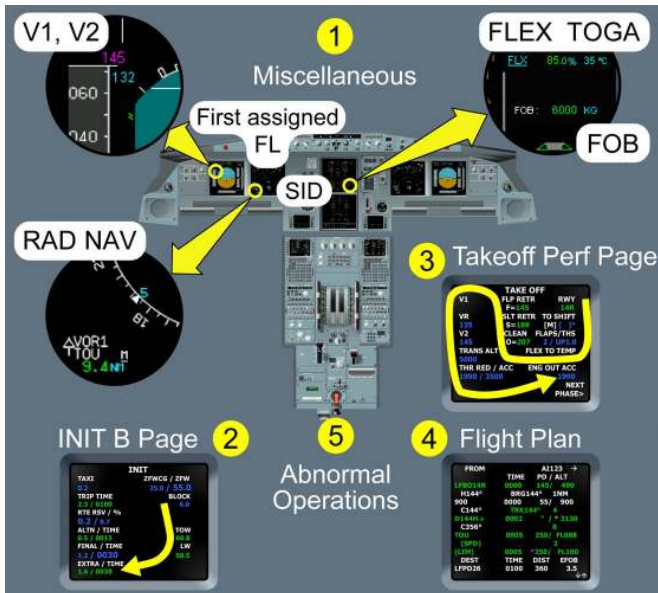


1- Miscellaneous

Aircraft type and model (Tail strike awareness)
Aircraft technical status (MEL and CDL considerations, relevant OEB)
NOTAMS
Weather
RWY conditions
Use of ENG/Wing Anti Ice
ENG Start Procedure
Push Back
Expected Taxi Clearance
Use of Radar
Use of Packs for Takeoff

2- INIT B Page

Block Fuel ⁽¹⁾ (FOB on EW/D)
Estimated TOW
Extra time at destination

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRE START
---	--

3- Takeoff Perf Page	
TO RWY TO CONF FLEX / TOGA ⁽¹⁾ V1, VR, V2 ⁽¹⁾ TRANS ALT THR RED / ACC Altitude	(FLEX TOGA on E/WD) (V1, V2 on PFD)
4- Flight Plan	
Minimum Safe Altitude First assigned FL ⁽¹⁾ Flight Plan description ⁽¹⁾ RAD NAV ⁽¹⁾	(altitude target in blue on PFD) (SID on MCDU FPLN page) (RAD NAV on ND)
5- Abnormal Operations	
For any failure before V1: CAPT will call "STOP" or "GO" In case of failure after V1: continue TO, no actions before 400 ft AGL except gear up reaching 400 ft AGL, ECAM actions reaching EO ACC altitude, stop ECAM, push for ALT, acceleration and clean up at green dot: OP CLB, MCT, continue ECAM, after TO C/L, status ENG OUT routing: EOSID, SID, radar vector, immediate return ...	

⁽¹⁾ Items that must be cross-checked on the associated display.

FMS UPDATING

When the load and trim sheet is available, the crew will:

- Updates the ZFWCG/ZFW
- Checks TOW consistent with load sheet
- Checks updated fuel figures
- Modify the FLEX TEMP and the take-off speeds as required
- Enter the THS position in PERF TAKE OFF page

When the predictions are available, the crew will print the pre-flight data.

COCKPIT PREPARATION	
Ident.: NO-020-00005454.0002001 / 27 JUN 08 Applicable to: MSN 1320-2180	


FLOW PATTERN

The scan pattern varies, depending on the pilot status, i.e PF, PNF, CM1, or CM2,

and the areas of responsibility:

1. Overhead panel: Extinguish any white lights
2. Center instrument panel
3. pedestal
4. FMGS preparation, and when both pilots are seated:
5. Glareshield
6. Lateral consoles and CM1/CM2 panels

Cockpit preparation flow pattern

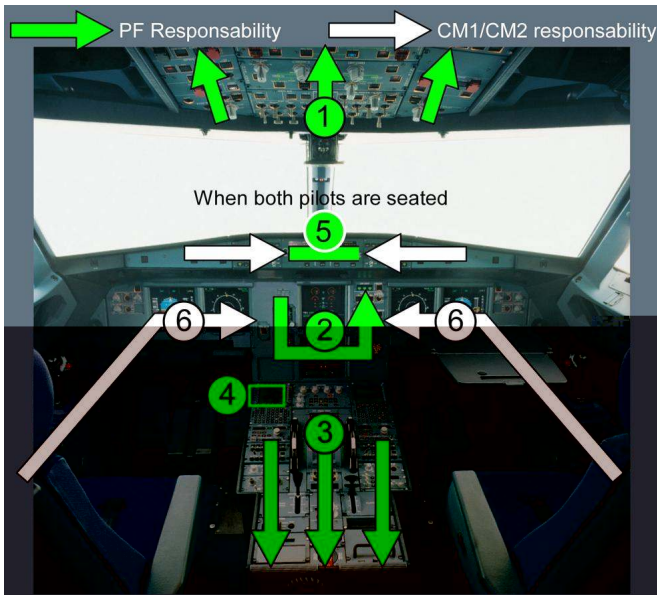


FMGS PROGRAMMING

FMGS programming involves inserting navigation data, then performance data. It is to be noted that:

- Boxed fields must be filled
- Blue fields inform the crew that entry is permitted
- Green fields are used for FMS generated data, and cannot be changed
- Magenta characters identify limits (altitude, speed or time), that FMS will attempt to meet
- Yellow characters indicate a temporary flight plan display

- Amber characters signify that the item being displayed is important and requires immediate action
- Small font signifies that data is FMS computed
- Large font signifies manually entered data.

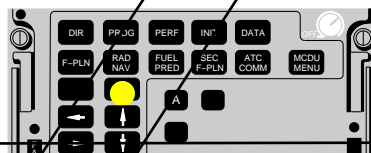

- **F-PLN**

The F-PLN A page is to be completed thoroughly including:

- The take-off runway
- SID
- Altitude and speed constraints
- Correct transition to the cruise waypoint
- Intended step climb/descents, according to the Computerized Flight Plan (CFP).

If time permits, the wind profile along the flight plan may be inserted using vertical revision through wind prompt.

The flight crew should also check the overall route distance (6th line of the F-PLN page), versus CFP distance.

- **SEC F-PLN**

The SEC F-PLN should be used to consider an alternate runway for take-off, a return to departure airfield or a routing to a take-off alternate.

- **RAD NAV**

The RAD NAV page is checked, and any required NAVAID should be manually entered using ident. If a NAVAID is reported on NOTAM as unreliable, it must be deselected on the MCDU DATA/POSITION MONITOR/SEL NAVAID page.

- **INIT B**

The flight crew:

- Inserts the expected ZFWCG/ZFW, and block fuel to initialize a F-PLN computation.
- Checks fuel figures consistent with flight preparation fuel figures.

The flight crew will update weight and CG on receipt of the load sheet.

The FMS uses the trip wind for the entire flight from origin to destination. The trip wind is an average wind component that may be extracted from the CFP. The trip wind facility is available if the wind profile has not already been entered.

After Engine start, the INIT B page is no longer available. The flight crew should use the FUEL PRED page for weight and fuel data insertion, if required.

The INIT B page should not be completed immediately after INIT A, because the FMGS would begin to compute F-PLN predictions. This would slow down the entry procedure.

- **PERF**

The thrust reduction altitude/acceleration altitude (THR RED /ACC) are set to default at 1 500 ft, or at a value defined by airline policy. The THR RED/ACC may be changed in the PERF TAKE-OFF page, if required. The flight crew should consider the applicable noise abatement procedure.

The one-engine-out acceleration altitude must:

- Be at least 400 ft above airport altitude
- Ensure that the net flight path is 35 ft above obstacles
- Ensure that the maximum time for takeoff thrust is not exceeded.

Therefore, there are generally a minimum and a maximum one engine out acceleration altitude values. The minimum value satisfies the first two criteria. The maximum value satisfies the last one. Any value between those two may be retained.

The one engine out acceleration altitude is usually defaulted to 1 500 ft AGL and will be updated as required.

The flight crew uses the PERF CLB page to pre-select a speed. For example, "Green Dot" speed for a sharp turn after take-off.

The crew may also check on the PROG page the CRZ FL, MAX REC FL and OPT FL.


Once the FMGS has been programmed, the PNF should then cross check the information prior to the take-off briefing.

When the predictions are available, the crew may print the PREFLIGHT DATA r. This listing provides all the predictions which may be used during the initial part of the flight.

TAKE-OFF BRIEFING

The PF should perform the takeoff briefing at the gate , when the flight crew workload permits, Cockpit preparation has been completed and, before engine start. The takeoff briefing should be relevant, concise and chronological. When a main parameter is referred to by the PF, both flight crewmembers must crosscheck that the parameter has been set or programmed correctly. The takeoff briefing covers the following:

Take off briefing with associated checks

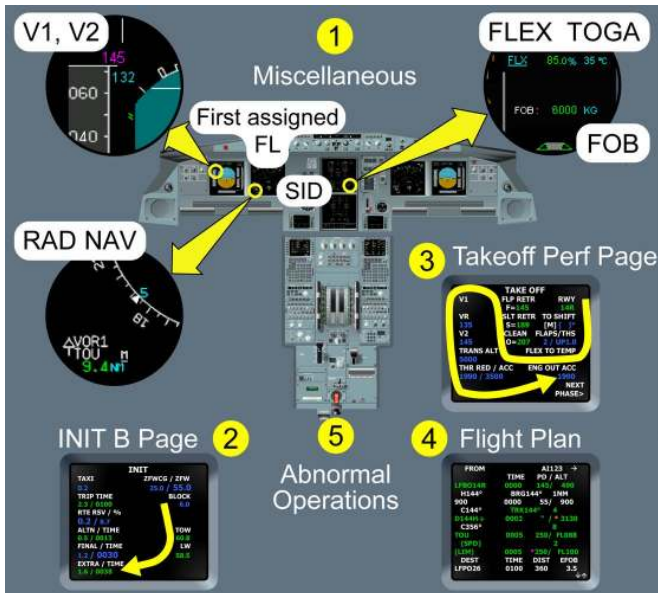


1- Miscellaneous

Aircraft type and model (Tail strike awareness)
Aircraft technical status (MEL and CDL considerations, relevant OEB)
NOTAMS
Weather
RWY conditions
Use of ENG/Wing Anti Ice
ENG Start Procedure
Push Back
Expected Taxi Clearance
Use of Radar
Use of Packs for Takeoff

2- INIT B Page

Block Fuel ⁽¹⁾ (FOB on EW/D)
Estimated TOW
Extra time at destination

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRE START
---	--

3- Takeoff Perf Page	
TO RWY TO CONF FLEX / TOGA ⁽¹⁾ V1, VR, V2 ⁽¹⁾ TRANS ALT THR RED / ACC Altitude	(FLEX TOGA on E/WD) (V1, V2 on PFD)
4- Flight Plan	
Minimum Safe Altitude First assigned FL ⁽¹⁾ Flight Plan description ⁽¹⁾ RAD NAV ⁽¹⁾	(altitude target in blue on PFD) (SID on MCDU FPLN page) (RAD NAV on ND)
5- Abnormal Operations	
For any failure before V1: CAPT will call "STOP" or "GO" In case of failure after V1: continue TO, no actions before 400 ft AGL except gear up reaching 400 ft AGL, ECAM actions reaching EO ACC altitude, stop ECAM, push for ALT, acceleration and clean up at green dot: OP CLB, MCT, continue ECAM, after TO C/L, status ENG OUT routing: EOSID, SID, radar vector, immediate return ...	

(1) Items that must be cross-checked on the associated display.

FMS UPDATING

When the load and trim sheet is available, the flight crew:

- Updates the ZFWCG/ZFW
- Checks that the TOW is consistent with the load sheet
- Checks the updated fuel figures
- Changes the FLEX TEMP and the take-off speeds as required
- Enters the THS position on the PERF TAKE OFF page

When the predictions are available, the flight crew prints out the pre-flight data.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

PRE START

MISCELLANEOUS

Ident.: NO-020-00005455.0001001 / 25 JUN 08

Applicable to: ALL

SEATING POSITION

To achieve a correct seating position, the aircraft is fitted with an eye-position indicator on the centre windscreen post. The eye-position indicator has two balls on it. When the balls are superimposed on each other, they indicate that the pilot's eyes are in the correct position.

The flight crew should not sit too low, to avoid increasing the cockpit cut-off angle, therefore reducing the visual segment. During Low Visibili

ENGINE AUTO START

Ident.: NO-030-00005456.0002001 / 16 JUN 08

Applicable to: ALL

Engines usually start using the Automatic Starting function. The Full Authority Digital Engine Control (FADEC) systems control this engine Automatic Starting function, and takes appropriate action, if engine parameters are exceeded. This function extends significantly the duration of engine life.

The thrust levers must be confirmed at "idle" before engine-start. If the thrust levers are not at "idle", the thrust increases above idle after engine-start, and can result in a hazardous situation. However, an **ENG START FAULT** ECAM warning triggers, to indicate that the flight crew must set the thrust levers to "idle".

The engines are started in sequence, preferably engine 2 first, in order to pressurize yellow hydraulic system, which supplies the parking brake accumulator.

When the ENG START selector is set to "START", the FADECs are electrically-supplied. When there is sufficient BLEED PRESS, the PF begins the start sequence by setting the ENG MASTER switch to ON. The flight crew should monitor the start sequence:

- Start valve opens
- N2 increases
- IGN A(B)
- Fuel flow
- EGT
- N1
- Oil pressure increases
- Start valve closes
- IGN indication off (*Refer to FCOM/PRO-NOR-SOP-08 AUTOMATIC ENGINE START*)

After reaching the peak EGT, or when AVAIL is displayed, the PF can start engine 1. The flight crew should check the relative engine vibration level.

When the ENG START selector is set to NORM, the packs return to the OPEN position. APU Bleed should immediately be turned off, to avoid engine ingestion of exhaust gas.

If the start is not successful, the flight crew must use the ECAM as usually done, and avoid instinctively selecting the ENG MASTER switch to OFF. This would interrupt the FADEC protective actions (e. g. cranking after hot start).



AVERAGE IDLE ENGINE PARAMETERS

Ident.: NO-030-00005457.0003001 / 26 MAR 08

Applicable to: ALL

As soon as the engine-start is complete, the flight crew should check the stabilized parameters. At ISA sea level:

N1 about 19.5 %

N2 about 58.5 %

EGT about 390 °C

FF about 275 kg/h- 600 lb/h

ENGINE START MALFUNCTION

Ident.: NO-030-00005458.0001001 / 26 MAR 08

Applicable to: ALL

Following an aborted engine start, the crew will consider an engine dry cranking prior resuming a new engine start attempt. Starter limitations in FCOM, *Refer to FCOM/LIM-70 STARTER*, must be observed.

MANUAL ENGINE START

Ident.: NO-030-00005459.0001001 / 26 MAR 08

Applicable to: ALL

The flight crew should only perform a manual start if:

- The EGT margins are low
- The residual EGT is high
- A dry crank is performed.

It may be appropriate to perform a manual start in high altitude operations, or after an aborted engine start.

The MANUAL ENGINE START procedure is a "read and do" procedure. *Refer to FCOM/99 Duref cible* before starting a manual engine start.

The FADEC has limited control over the manual start process. It ensures that the engine start valve closes at 50 % N2. It monitors engine parameters, and generates an associated warning when necessary.

It is recommended that the flight crew use the stopwatch to ensure that the starter engagement time remains within the limits.



TAILPIPE FIRE

Ident.: NO-030-00005460.0001001 / 28 MAY 08

Applicable to: ALL

An engine tailpipe fire may occur at engine-start, and may be the result of either excess fuel in the combustion chamber, or an oil leak in the low-pressure turbine. A tailpipe fire is an internal fire within the engine. No critical areas are affected.

If the ground crew reports a tailpipe fire, the flight crew must perform the following actions:

- Shut down the engine (MASTER switch set to OFF)
- Do NOT press the ENG FIRE pushbutton
- Crank the engine, by using either the bleed of the opposite the engine, the APU bleed, or external pneumatic power (Set ENG START selector to CRANK, then set the MAN START switch to ON).

Do NOT use the ENG FIRE pushbutton, this would stop power to the FADECs, and would stop the motoring sequence. The fire extinguisher must not be used, as it will not extinguish an internal engine fire. As a first priority, the engine must be ventilated.

If the ground crew reports a tailpipe fire, and bleed air is not readily available, a ground fire-extinguisher should be used as last resort: Chemical or dry chemical powder causes serious corrosive damage to the engine.

ENGINES WARM UP PERIOD

Ident.: NO-030-00005461.0001001 / 26 MAR 08

Applicable to: ALL


After engine-start, and in order to avoid thermal shock of the engine, the engine should be operated at idle or near idle (*Refer to FCOM/PRO-NOR-SOP-09-A AFTER START - ENG MODE selector*) before setting the thrust lever to high power. The warm-up can include any taxi time at idle.

AFTER START FLOW PATTERN

Ident.: NO-030-00005462.0001001 / 26 JUN 08

Applicable to: ALL

When the engines have started, the PF sets the ENG MODE selector to NORM to permit normal pack operation. At this time, the After Start Flow Pattern begins.

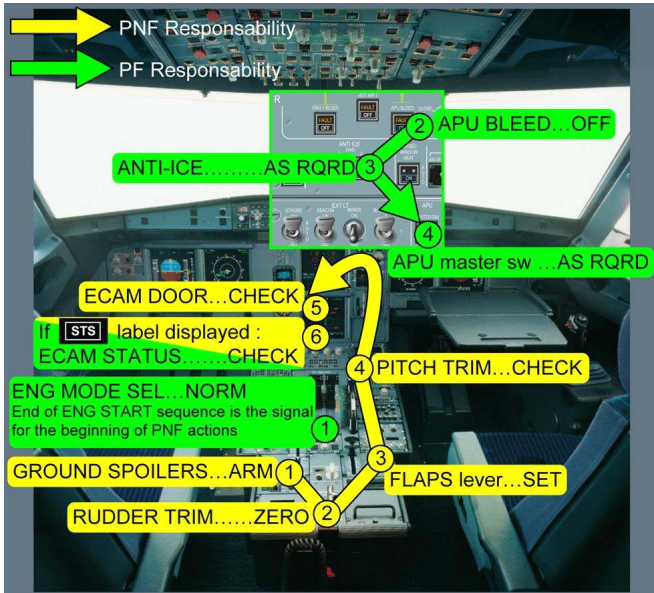

POWERPUSH

Ident.: NO-040-00005463.0001001 / 26 MAR 08

Applicable to: ALL

If a Power Push Unit (PPU) is to be used for pushback, the PPU will be placed on the left main landing gear and engine 2 will be started at the gate. This will pressurize the yellow hydraulic circuit for parking brake. The nose wheel steering, on green hydraulic circuit, is ensured via the PTU. Prior push back, check that there is no NWS DISC memo on the EWD.

The flight crew is in charge of the steering according to ground indications through the interphone. Due to a face-to-face situation between ground personnel and flight crew, a clear understanding of directional phraseology is essential. The engine 1 will be started when the power push is completed and PPU removed.

During power push, the crew will not use the brakes, unless required due to an emergency and will not move flight controls or flap lever.

In case of emergency, the PPU should be immediately removed out of the evacuation area. Nevertheless, cabin evacuation is possible with the PPU in place.

TAXI ROLL AND STEERING

Ident.: NO-040-00005464.0001001 / 30 MAY 08

Applicable to: ALL

Before taxi, check that the amber "NWS DISC" ECAM message is off, to ensure that steering is fully available.

THRUST USE

Only a little power is needed above thrust idle, in order to get the aircraft moving (N1 40 %). Excessive thrust application can result in exhaust-blast damage or Foreign Object Damage (FOD). Thrust should normally be used symmetrically.


TILLER AND RUDDER PEDALS USE

Pedals control nosewheel steering at low speed ($\pm 6^\circ$ with full pedal deflection).

Therefore, on straight taxiways and on shallow turns, the pilot can use the pedals to steer the aircraft, keeping a hand on the tiller. In sharper turns, the pilot must use the tiller.

STEERING TECHNIQUE

The Nosewheel steering is "by-wire" with no mechanical connection between the tiller and the nosewheel. The relationship between tiller deflection and nosewheel angle is not linear and the tiller forces are light.

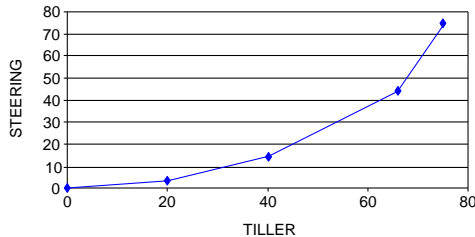

Therefore, the PF should move the tiller smoothly and maintain the tiller's position. Any correction should be small and smooth, and maintained for enough time to enable the pilot to assess the outcome. Being over-active on the tiller will cause uncomfortable oscillations.

On straight taxiways, the aircraft is correctly aligned on the centerline, when the centerline is lined-up between the PFD and ND.

Proper centerline following




If both pilots act on the tiller or pedals, their inputs are added until the maximum value of the steering angle (programmed within the BSCU) is reached.

When the seating position is correct, the cut-off angle is 20 °, and the visual ground geometry provides an obscured segment of 42 ft (12.5 m). During taxi, a turn must be initiated before an obstacle approaches the obscured segment. This provides both wing and tail clearance, with symmetric thrust and no differential braking.

Asymmetric thrust can be used to initiate a tight turn and to keep the aircraft moving during the turn. If nosewheel lateral skidding occurs while turning, reduce taxi speed or increase turn radius. Avoid stopping the aircraft in a turn, because excessive thrust will be required to start the aircraft moving again.

The flight crew should be aware that the main gear on the inside of a turn will always cut the corner and track inside of the nosewheel track. For this reason, the oversteering technique may be considered especially for A321 where main gear is 20 m behind the pilot.


Oversteering technique

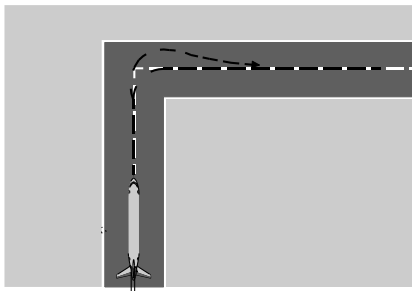

- Asymmetric thrust will be used during the turn. Anticipation is required to ensure that asymmetric thrust is established before the turn is commenced, between 30 % and 35 % (or 1.02 and 1.03 EPR), to maintain a continuous speed of approximately 5 to 8 kt throughout the manoeuvre
- It is essential to keep minimum ground speed during the turn in order not to need to increase the thrust too significantly so as not to get stuck. It is a good practice that the CM2 calls the GS from ND while in turn
- Differential braking is allowed, but a braked pivot turn is not recommended as a general rule (i.e. braking to fully stop the wheels on one main gear), to avoid stress on the landing gear assembly
- On wet or contaminated runway, more specifically when turning on the runway white or yellow painted marking, tight turn lead to jerky rides of the nose wheel which are noisy and uncomfortable.

For the CM2, the procedure is symmetrical (taxi on the left hand side of the runway).

Aircraft dimensions

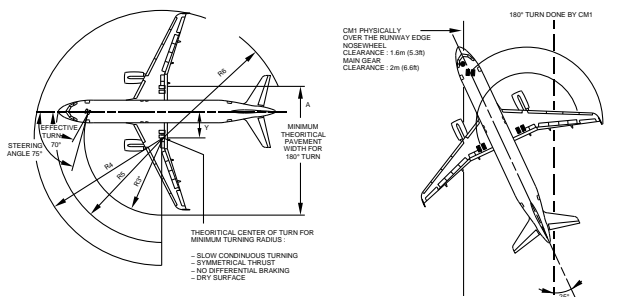


FIGURES

Ident.: NO-040-00005465.0003001 / 26 MAR 08

Applicable to: MSN 1320-1637, 1777-2180

Y	R3	R4	R5	R6	NWS Limit Angle	Minimum Runway Width with Asymmetric Thrust
15 ft 1 in 4.61 m	45 ft 5 in 13.84 m	72 ft 2 in 21.99 m	60 ft 18.3 m	71 ft 1 in 21.91 m	75 °	30 m 99 ft

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS TAXI
---	---

FIGURES

Ident.: NO-040-00005465.0005001 / 26 MAR 08

Applicable to: MSN 0781-0852, 1720

Y	R3	R4	R5	R6	NWS Limit Angle	Minimum Runway Width with Asymmetric Thrust
16 ft 9 in 5.1 m	59 ft 1 in 18 m	74 ft 6 in 22.7 m	74 ft 2 in 22.6 m	80 ft 5 in 24.5 m	75 °	32 m 105 ft

It must be noted that since $R6 > R4$, wing obstacle clearance does not imply tail obstacle clearance

BRAKE CHECK

Ident.: NO-040-00005466.0001001 / 26 MAR 08

Applicable to: ALL

When cleared to taxi, the PF should set the Parking Brake to "OFF". When the aircraft starts to move, the PF should check the efficiency of the normal braking system by gently pressing the brake pedals, to ensure that the aircraft slows down. The PNF should also check the triple brake indicator to ensure that brake pressure drops to zero. This indicates a successful changeover to the normal braking system.

CARBON BRAKE WEAR

Ident.: NO-040-00005467.0001001 / 26 MAR 08

Applicable to: ALL

Carbon brake wear depends on the number of brake applications and on brake temperature. It does not depend on the applied pressure, or the duration of the braking. The temperature at which maximum brake wear occurs depends on the brake manufacturer. Therefore, the only way the pilot can minimize brake wear is to reduce the number of brake applications.

TAXI SPEED AND BRAKING

Ident.: NO-040-00005468.0001001 / 26 MAR 08

Applicable to: ALL

On long, straight taxiways, and with no ATC or other ground traffic constraints, the PF should allow the aircraft to accelerate to 30 kt, and should then use one smooth brake application to decelerate to 10 kt. The PF should not "ride" the brakes. The GS



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

TAXI

indication on the ND should be used to assess taxi speed.

BRAKE TEMPERATURE

Ident.: NO-040-00005469.0001001 / 28 MAY 08
Applicable to: ALL

The FCOM limits brake temperature to 300 °C before takeoff is started. This limit ensures that, in the case of hydraulic fluid leakage, any hydraulic fluid, that may come into contact with the brake units, will not be ignited in the wheelwell. This limit does not ensure that, in the case of a high energy rejected takeoff, the maximum brake energy limitation will be respected. Thermal oxidation increases at high temperatures. Therefore, if the brakes absorb too much heat, carbon oxidation will increase. This is the reason why the brakes should not be used repeatedly at temperatures above 500 °C during normal operation. In addition, after heavy braking, the use of brake fans ¹ can increase oxidation of the brake surface hot spots, if the brakes are not thermally equalized.

BRAKING ANOMALIES

Ident.: NO-040-00005470.0001001 / 26 MAR 08
Applicable to: MSN 1320

If the ACCU PRESS drops below 1 500 PSI, the flight crew should be aware that the Parking Brake can, quite suddenly, become less efficient. This explains the amber range on the hydraulic pressure gauge of the ACCU PRESS. If the flight crew encounters any braking problems during taxi, they should set the A/SKID & N/W STRG Sw to OFF. They should not apply pressure to the pedals while setting the A/SKID & N/W STRG Sw to OFF. Then, the PF should refer to the triple brake indicator and modulate the pressure as necessary. When parking brake is ON, pressing the pedals has no effect on braking. Consequently, if for any reason the aircraft moves forward while the park brake is ON, the parking brake must be released in order to get braking efficiency from the pedals.

BRAKING ANOMALIES

Ident.: NO-040-00005470.0002001 / 26 MAR 08
Applicable to: MSN 0781-0852, 1637-2180

If the ACCU PRESS drops below 1 500 PSI, the flight crew should be aware that the Parking Brake can, quite suddenly, become less efficient. This explains the amber range on the hydraulic pressure gauge of the ACCU PRESS. If the flight crew encounters any braking problems during taxi, they should set the

A/SKID & N/W STRG Sw to OFF. They should not apply pressure to the pedals while setting the A/SKID & N/W STRG Sw to OFF. Then, the PF should refer to the triple brake indicator and modulate the pressure as necessary.

BRAKE FANS r

Ident.: NO-040-00005471.0001001 / 28 MAY 08

Applicable to: MSN 1320-1637, 1777-2180

Brake fans cool the brakes, and the brake temperature sensor. Therefore, when the brake fans are running, the indicated brake temperature will be significantly lower than the indicated brake temperature when the brake fans are off.

Therefore, as soon as the brake fans are switched on, the indicated brake temperature decreases almost instantaneously. On the other hand, when the brake fans are switched off, it will take several minutes for the indicated brake temperature to increase and match the real brake temperature.

When the fans are running, the difference between the indicated and the actual brake temperature can range from 50 °C (when the actual brake temperature is 100 °C) to 150 °C (when the actual brake temperature is 300 °C). Therefore, before takeoff, if the fans are running, the flight crew should refer to the indicated brake temperature.

When the indicated brake temperature is above 150 °C, takeoff must be delayed.

Brake fans should not be used during takeoff, in order to avoid Foreign Object Damage to fans and brakes.

FLIGHT CONTROL CHECK

Ident.: NO-040-00005472.0001001 / 26 MAR 08

Applicable to: ALL

At a convenient stage, before or during taxi, and before arming the autobrake, the PF silently applies full longitudinal and lateral sidestick deflection. On the F/CTL page, the PNF checks and calls out full travel of elevators and ailerons, and correct deflection and retraction of spoilers. As each full travel/neutral position is reached, the PNF calls out:

- "Full up, full down, neutral"
- "Full left, full right, neutral"

The PF silently checks that the PNF calls are in accordance with the sidestick order.

The PF then presses the PEDAL DISC pb on the nose wheel tiller and silently applies full left and full right rudder and then returns the rudder to neutral. The PNF follows on the rudder pedals and, when each full travel/neutral position is reached, calls out:

- "Full left, full right, neutral"

Full control input must be held for sufficient time for full travel to be reached and

indicated on F/CTL page.

The PNF then applies full longitudinal and lateral sidestick deflection, and on the F/CTL page, silently checks full travel and correct sense of all elevators and ailerons, and correct deflection and retraction of all spoilers.

If this check is carried out during taxiing, it is essential that the PF remains head-up throughout the procedure.

TAKEOFF BRIEFING CONFIRMATION

Ident.: NO-040-00005473.0001001 / 28 MAY 08

Applicable to: ALL

Takeoff briefing should usually be a brief confirmation of the full takeoff briefing made at the parking bay and should include any changes that may have occurred, e.g. change of SID, change in runway conditions etc.

If ATC clears the aircraft to maintain a specific heading after takeoff, turn the FCU HDG selector to disarm the NAV. The current aircraft heading will be displayed on the FCU and the ND, and the flight crew can then set the cleared heading. Once airborne, and above 30 ft, RA, RWY TRK engages. To apply the clearance, the FCU HDG knob should be pulled. Once cleared to resume the SID, a HDG adjustment may be necessary to intercept the desired track for NAV capture.

TAXI WITH ONE ENGINE SHUTDOWN

Ident.: NO-040-00005474.0001001 / 26 MAR 08

Applicable to: ALL

Brake life and fuel savings may govern company policy on permitting aircraft to taxi with one engine shut down. However, if taxiing out with one engine shutdown, the crew should be aware of the following:

- It is recommended to retain the use of engine 1 during taxi to maintain the green hydraulic system for normal braking and NWS.
- Before releasing the parking brake, the yellow electrical pump will be set ON to pressurize the yellow hydraulic system (ALT/PARK BRK) and avoid PTU operation. The crew will check the hydraulic yellow accumulator pressure.
- Slow or tight turns in the direction of the operating engine may not be possible at high gross weights.
- It is not possible for ground personnel to protect the engine against fire, when the aircraft moves away from the ramp.
- The remaining engines should be started with sufficient time for engine warm-up before takeoff.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

TAXI


- Any faults encountered during or after starting the remaining engine may require a return to the gate for maintenance and thus generate a further departure delay.
- Taxi with one engine shut down may require higher thrust than usual. Caution must, therefore, be exercised to avoid excessive jet-blast and the risk of Foreign Object Damage (FOD).
- The use of APU is recommended but the APU bleed should be switched off to avoid ingestion of exhaust gases by the air conditioning system.
- Before ENG2 start,
 - The yellow pump is set off to check correct operation of the PTU
 - APU BLEED is set back to ON for ENG2 bleed start.

Mdcofa38843(i)-1.1140171-1.1140418(O)-5.82230822(M)-

TAXI FLOW PATTERN

Ident.: NO-040-00005476.0001001 / 26 MAR 08

Applicable to: ALL

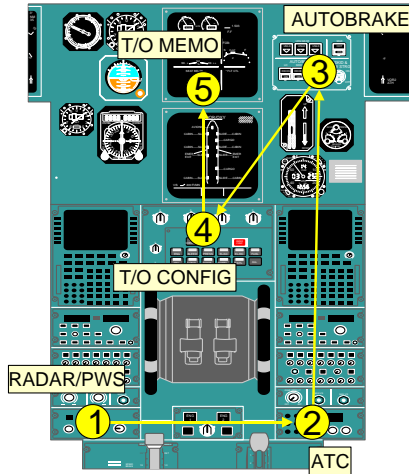TAXI FLOW PATTERN



THRUST SETTING

Ident.: NO-050-00005477.0001001 / 26 MAR 08

Applicable to: ALL

The PF should announce "Take-off". The PF then applies power in as follows:
If cross wind is at or below 20 kt and there is no tail wind

- From idle to 1.05 EPR / 50 % N1 by reference to the TLA indicator on the EPR / N1 gauge.
- When the engine parameters have stabilized, to the FLX/MCT or TOGA detent as appropriate.



In case of tailwind or if cross wind is greater than 20 kt:

- From idle to 1.05 EPR / 50 % N1 by reference to the TLA indicator on the EPR / N1 gauge.
- Once stabilized, from 1.05 EPR / 50 % N1 to 1.15 EPR / 70 % N1 by reference to the TLA indicator on the EPR / N1 gauge.
- Then, to FLX / TOGA, as required to reach take-off thrust by 40 kt groundspeed.

This procedure ensures that all engines will accelerate similarly. If not properly applied, this may lead to asymmetrical thrust increase, and, consequently, to severe directional control problem.

If the thrust levers are not set to the proper take-off detent, e.g. FLX instead of TOGA, a message comes up on the ECAM.

TAKEOFF ROLL

Ident.: NO-050-00005478.0001001 / 03 JUL 08

Applicable to: ALL

Once the thrust is set, the PF announces the indications on the FMA. The PNF must check that the thrust is set by 80 kt and must announce "Thrust Set".

The Captain must keep his hand on the thrust levers when the thrust levers are set to TOGA/FLX notch and until V1.


On a normal takeoff, to counteract the pitch up moment during thrust application, the PF should apply half forward (full forward in cross wind case) sidestick at the start of the takeoff roll until reaching 80 kt. At this point, the input should be gradually reduced



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

TAKEOFF

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS TAKEOFF
---	--

input is made around the time of lift-off, the possibility of tailstrike increases significantly on A321.

During rotation, the crew must not chase the FD pitch bar, since it does not give any pitch rate order, and might lead to overreaction.

Once airborne only, the crew must refine the aircraft pitch attitude using the FD, which is then representative of the SRS orders. The fly-by-wire control laws change into flight normal law, with automatic pitch trim active.

AIRCRAFT GEOMETRY
Ident.: NO-050-00005481.0003001 / 26 MAR 08 Applicable to: MSN 1320-1637, 1777-2180

Tail strike pitch attitude	
L/G compressed	L/G extended
11.7 °	13.5 °

AIRCRAFT GEOMETRY
Ident.: NO-050-00005481.0005001 / 26 MAR 08 Applicable to: MSN 0781-0852, 1720

Tail strike pitch attitude	
L/G compressed	L/G extended
9.7 °	11.2 °

TAIL STRIKE AVOIDANCE
Ident.: NO-050-00005482.0001001 / 26 MAR 08 Applicable to: ALL

INTRODUCTION

If tailstrike it is not a concern for the A318, the importance of this subject increases as fuselage length increases. Therefore, it is particularly important for A321 operators. Tail strikes can cause extensive structural damage, which can jeopardize the flight and lead to heavy maintenance action. They most often occur in such adverse conditions as crosswind, turbulence, windshear, etc.

MAIN FACTORS

EARLY ROTATION

Early rotation occurs when rotation is initiated below the scheduled VR. The

potential reasons for this are:

- The calculated VR is incorrect for the aircraft weight or flap configuration.
- The PF commands rotation below VR due to gusts, windshear or an obstacle on the runway.

Whatever the cause of the early rotation, the result will be an increased pitch attitude at lift-off, and consequently a reduced tail clearance.

ROTATION TECHNIQUE

The recommendation given in the ROTATION TECHNIQUE paragraph should be applied.

A fast rotation rate increases the risk of tailstrike, but a slow rate increases take-off distance. The recommended rate is about 3 °/s, which reflects the average rates achieved during flight test, and is also the reference rate for performance calculations.

CONFIGURATION (NOT APPLICABLE TO A318)

When performance is limiting the takeoff weight, the flight crew uses TOGA thrust and selects the configuration that provides the highest takeoff weight.

When the actual takeoff weight is lower than the permissible one, the flight crew uses FLEX TO thrust. For a given aircraft weight, a variety of flap configurations are possible. Usually, the flight crew selects the configuration that provides the maximum FLEX temperature. This is done to prolong engine life. The first degrees of flexible thrust have an impact on maintenance costs about 5 times higher than the last one.

The configuration that provides the maximum FLEX temperature varies with the runway length.

On short runways, CONF 3 usually provides the highest FLEX temperature, and the tail clearance at lift off does not depend on the configuration.

On medium or long runways, the second segment limitation becomes the limiting factor, and CONF 2 or CONF 1+F becomes the optimum configuration, in terms of FLEX temperature. In these cases, the tail clearance at lift off depends on the configuration. The highest flap configuration gives the highest tailstrike margin.

TAKEOFF TRIM SETTING

The main purpose of the pitch trim setting for take-off is to provide consistent rotation characteristics. Take-off pitch trim is set manually via the pitch trim wheel. The aircraft performs a safe takeoff, provided the pitch trim setting is within the green band on the pitch trim wheel.

However, the pitch trim setting significantly affects the aircraft behaviour during

rotation:

- With a forward CG and the pitch trim set to the nose-down limit the pilots will feel an aircraft "heavy to rotate" and aircraft rotation will be very slow in response to the normal take off stick displacement.
- With an aft CG and the pitch trim set to the nose-up limit the pilots will most probably have to counteract an early autorotation until VR is reached.

In either case the pilot may have to modify his normal control input in order to achieve the desired rotation rate, but should be cautious not to overreact.

CROSSWIND TAKEOFF

It is said in the TAKEOFF ROLL paragraph that care should be taken to avoid using large deflection, resulting in excessive spoiler deployment. A direct effect of the reduction in lift due to the extension of the spoilers on one wing will be a reduction in tail clearance and an increased risk of tailstrike.

OLEO INFLATION

The correct extension of the main landing gear shock absorber (and thus the nominal increase in tail clearance during the rotation) relies on the correct inflation of the oleos.

ACTION IN CASE OF TAILSTRIKE

If a tailstrike occurs at take-off, flight at attitude requiring a pressurized cabin must be avoided and a return to the originating airport should be performed for damage assessment.

MAXIMUM DEMONSTRATED CROSSWIND FOR TAKE-OFF

Ident.: NO-050-00005483.0001001 / 28 MAY 08

Applicable to: ALL

The maximum demonstrated crosswind at takeoff is 29 knots, with gusts up to 38 knots.

AP ENGAGEMENT

Ident.: NO-050-00005484.0001001 / 26 MAR 08

Applicable to: ALL

The AP can be engaged 5 s after take-off and above 100 ft RA.



VERTICAL PROFILE

Ident.: NO-050-00005485.0002001 / 28 MAY 08

Applicable to: ALL

SRS engages when the thrust levers are set to the applicable detent for takeoff and will remain engaged until the acceleration altitude.

The SRS pitch command is the minimum of the following pitches:

- Pitch required to fly $V_2 + 10$ in All Engine Operative case (AEO)
- Pitch required to fly IAS at the time of failure (with minimum of V_2 and maximum of $V_2 + 15$) in One Engine Inoperative case (OEI)
- Maximum pitch attitude of 18° (22.5° in case of windshear)
- Pitch required to climb a 120 ft/min minimum vertical speed.

This explains why, during takeoff, the IAS which is actually flown in most cases is neither $V_2 + 10$ (AEO) nor V_2 (OEI).

LATERAL PROFILE

Ident.: NO-050-00005486.0001001 / 26 MAR 08

Applicable to: ALL

Under most circumstances, the crew can expect to follow the programmed SID. In this case, NAV is armed on selecting the thrust levers to the applicable detent for take-off and engages once above 30 ft RA.

THRUST REDUCTION ALTITUDE

Ident.: NO-050-00005487.0001001 / 28 MAY 08

Applicable to: ALL

At the thrust reduction altitude, "LVR CLB" flashes on the FMA. When manual flying, lower slightly the nose, as applicable, to anticipate the pitch down FD order. Bring the thrust levers back to CLB detent. The A/THR is now active (A/THR on the FMA changes from blue to white).

The FD pitch down order depends upon the amount of thrust decrease between TOGA or FLX and CLB.

If takeoff was performed packs OFF, the packs will be selected back to ON after thrust reduction because of the potential resulting EGT increase. They will be preferably selected sequentially to improve passenger's comfort.

ACCELERATION ALTITUDE

Ident.: NO-050-00005488.0001001 / 26 MAR 08

Applicable to: ALL

At the acceleration altitude, the FD pitch mode changes from SRS to CLB or OP CLB mode. The speed target jumps:

- Either to the managed target speed e.g. speed constraint, speed limit or ECON climb speed
- Or to the preselected climb speed (entered by the pilot on the MCDU PERF CLB page before takeoff).

If green dot speed is higher than the managed target speed (e.g. speed constraint 220 kt) displayed by the magenta triangle on the PFD speed scale, the AP/FD will guide the aircraft to green dot (as per the general managed speed guidance rule). If required by ATC, the crew will select the adequate target speed (below green dot) on the FCU.

During takeoff phase, F and S speeds are the minimum speeds for retracting the surfaces:

- At F speed, the aircraft accelerating (positive speed trend): retract to 1.
- At S speed, the aircraft accelerating (positive speed trend): retract to 0.

If the engine start selector had been selected to IGN START for take-off, the PNF should confirm with the PF when it may be deselected.

TAKE-OFF AT HEAVY WEIGHT

Ident.: NO-050-00005489.0001001 / 25 APR 08

Applicable to: ALL

If take-off is carried out at heavy weight, two protections may intervene:

- The Automatic Retraction System (ARS)
- The Alpha Lock function

THE AUTOMATIC RETRACTION SYSTEM

While in CONF 1+F and IAS reaches 210 kt (VFE CONF1+F is 215 kt), the ARS is activated. The ARS automatically retracts flaps to 0°. The VFE displayed on the PFD change from VFE CONF1+F to VFE CONF 1. As the aircraft accelerates above S speed, the flap lever can be selected to 0. If IAS decreases below VFE CONF1+F, the flaps will not extend back to 1+F.

THE ALPHA LOCK FUNCTION

The slats alpha/speed lock function will prevent slat retraction at high AOA or low



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

TAKEOFF

speed at the moment the flap lever is moved from Flaps 1 to Flaps 0. "A. LOCK" pulses above the E/WD Slat indication. The inhibition is removed and the slats retract when both alpha and speed fall within normal values. This is a normal situation for take-off at heavy weight. If Alpha lock function is triggered, the crew will continue the scheduled acceleration, allowing further slats retraction.

IMMEDIATE TURN AFTER TAKE-OFF

Ident.: NO-050-00005490.0001001 / 26 MAR 08

Applicable to: ALL

Obstacle clearance, noise abatement, or departure procedures may require an immediate turn after take-off. Provided FD commands are followed accurately, the flaps and slats may be retracted using the normal procedure as FD orders provide bank angle limits with respect to speed and configuration.

LOW ALTITUDE LEVEL-OFF

Ident.: NO-050-00005491.0001001 / 26 MAR 08

Applicable to: ALL


If the aircraft is required to level off below the acceleration altitude, ALT* engages and target speed goes to initial climb speed. The "LVR CLB" message flashes on the FMA. In this case, the crew should expect a faster than normal acceleration, and be prepared to retract the flaps and slats promptly.

NOISE ABATEMENT TAKE-OFF

Ident.: NO-050-00005492.0001001 / 26 MAR 08

Applicable to: ALL

Noise Abatement Procedures will not be conducted in conditions of significant turbulence or windshear.

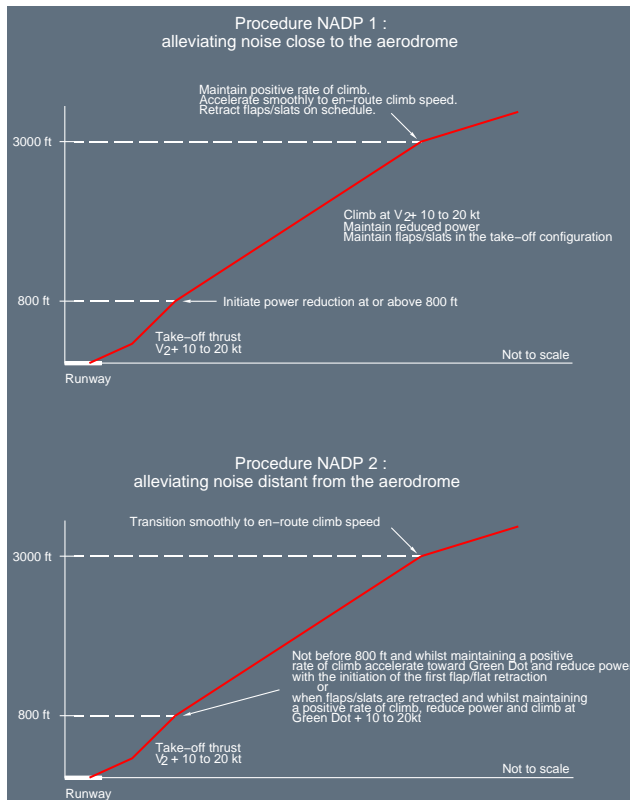noise abatement procedure




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

TAKEOFF

Intentionally left blank

GENERAL

Ident.: NO-060-00005493.0001001 / 26 MAR 08

Applicable to: ALL

During the climb, the thrust levers are in the CL detent, the A/THR is active in thrust mode and the FADECs manage the thrust to a maximum value depending upon ambient conditions.

AP/FD CLIMB MODES

Ident.: NO-060-00005494.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

The AP/FD climb modes may be either

- Managed
- Selected

MANAGED

The managed AP/FD mode in climb is CLB. Its use is recommended as long as the aircraft is cleared along the F-PLN.

SELECTED

The selected AP/FD modes in climb are OP CLB, V/S and EXPED r.

OP CLB is to be used if ATC gives radar vector or clears the aircraft direct to a given FL without any climb constraints.

The use of low values of V/S, e.g. less than 1 000 ft/min, may be appropriate for small altitude changes as it makes the guidance smoother and needs less thrust variation.

In areas of high traffic density, low values of vertical speed will reduce the possibility of nuisance TCAS warnings.

If the crew selects a high V/S, it may happen that the aircraft is unable to climb with this high V/S and to maintain the target speed with Max Climb thrust, for performance reasons. In that case, the AP/FD will guide to the target V/S, and the A/THR will command up to Max Climb thrust, in order to try to keep the target speed; but the aircraft will decelerate and its speed might reach VLS. When VLS is reached the AP/FD reverts to OP CLB and the aircraft accelerate to initial target speed.

Whenever V/S is used, pilots should pay particular attention to the speed trend as V/S takes precedence over speed requirements.

The EXPED mode r is used to climb with maximum vertical gradient i.e. the target

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS CLIMB
--	--

speed becomes green dot. Its use should be avoided above FL 250.

The crew should be aware that altitude constraints in the MCDU F-PLN page are observed only when the climb is managed, i.e. when CLB is displayed on the FMA. Any other vertical mode will disregard any altitude constraints.

A likely scenario would be, when the FCU altitude is set above an altitude constraint and the pilot selects V/S when below that constraint to avoid a potential TCAS TA. In this case, the aircraft will disregard the altitude constraint.

AP/FD CLIMB MODES

speed becomes green dot. Its use should be avoided above FL 250.

The crew should be aware that altitude constraints in the MCDU F-PLN page are observed only when the climb is managed, i.e. when CLB is displayed on the FMA.

Any other vertical mode will disregard any altitude constraints.

A likely scenario would be, when the FCU altitude is set above an altitude constraint and the pilot selects V/S when below that constraint to avoid a potential TCAS TA.

In this case, the aircraft will disregard the altitude constraint.

AP/FD CLIMB MODES

Ident.: NO-060-00005494.0005001 / 26 MAR 08

Applicable to: MSN 2180

The AP/FD climb modes may be either

- Managed
- Selected

MANAGED

The managed AP/FD mode in climb is CLB. Its use is recommended as long as the aircraft is cleared along the F-PLN.

SELECTED

The selected AP/FD modes in climb are OP CLB, V/S and EXPED r.

OP CLB is to be used if ATC gives radar vector or clears the aircraft direct to a given FL without any climb constraints.

The use of low values of V/S, e.g. less than 1 000 ft/min, may be appropriate for small altitude changes as it makes the guidance smoother and needs less thrust variation.

In areas of high traffic density, low values of vertical speed will reduce the possibility of nuisance TCAS warnings.

If the crew selects a high V/S, it may happen that the aircraft is unable to climb with this high V/S and to maintain the target speed with Max Climb thrust, for performance reasons. In that case, the AP/FD will guide to the target V/S, and the A/THR will command up to Max Climb thrust, in order to try to keep the target speed; but the aircraft will decelerate and its speed might reach VLS. When VLS is reached the AP will pitch the aircraft down so as to fly a V/S, which allows maintaining VLS. A triple click is generated.

Whenever V/S is used, pilots should pay particular attention to the speed trend as V/S takes precedence over speed requirements.

The EXPED mode r is used to climb with maximum vertical gradient i.e. the target

speed becomes green dot. Its use should be avoided above FL 250.

The crew should be aware that altitude constraints in the MCDU F-PLN page are observed only when the climb is managed, i.e. when CLB is displayed on the FMA.

Any other vertical mode will disregard any altitude constraints.

A likely scenario would be, when the FCU altitude is set above an altitude constraint and the pilot selects V/S when below that constraint to avoid a potential TCAS TA.

In this case, the aircraft will disregard the altitude constraint.

SPEED CONSIDERATIONS

Ident.: NO-060-00005495.0001001 / 26 MAR 08

Applicable to: ALL

The climb speed may be either:

- Managed
- Selected

MANAGED

The managed climb speed, computed by the FMGS, provides the most economical climb profile as it takes into account weight, actual and predicted winds, ISA deviation and Cost Index (CI). The managed climb speed also takes into account any speed constraints, e.g. the default speed limit which is 250 kt up to 10 000 ft.

SELECTED

If necessary, the climb speed can be either pre-selected on ground prior to take-off on the MCDU PERF CLIMB page or selected on the FCU as required.

On ground, prior take-off, speed target at acceleration altitude can be pre-selected on the MCDU PERF CLIMB page. It is to be used when the F-PLN has a sharp turn after take-off, when high angle of climb is required or for ATC clearance compliance.

Once airborne, the speed can be selected on FCU to achieve the maximum rate of climb or the maximum gradient of climb.

The speed to achieve the maximum rate of climb, i.e. to reach a given altitude in the shortest time, lies between ECON climb speed and green dot. As there is no indication of this speed on the PFD, a good rule of thumb is to use turbulence speed to achieve maximum rate.

The speed to achieve the maximum gradient of climb, i.e. to reach a given altitude in a shortest distance, is green dot. The MCDU PERF CLB page displays the time and distance required to achieve the selected altitude by climbing at green dot speed.

Avoid reducing to green dot at high altitude, particularly at heavy weight, as it can take a long time to accelerate to ECON mach.

Pilots should be aware that it is possible to select and fly a speed below green dot but

there would be no operational benefit in doing this.

When selected speed is used, the predictions on the F-PLN page assume the selected speed is kept till the next planned speed modification, e.g. 250 kt /10 000 ft, where managed speed is supposed to be resumed. Consequently, the FM predictions remain meaningful.

When IAS is selected in lower altitude, there is an automatic change to Mach at a specific crossover altitude.

Finally, as selected speed does not provide the optimum climb profile, it should only be used when operationally required, e.g. ATC constraint or weather.

VERTICAL PERFORMANCE PREDICTIONS

Ident.: NO-060-00005496.0001001 / 27 MAY 08

Applicable to: ALL

The MCDU PROG page provides the crew with the MAX REC ALT and with the OPT ALT information (See cruise section). This information is to be used to rapidly answer to ATC: "CAN YOU CLIMB TO FL XXX?"

The MCDU PERF CLB page provides predictions to a given FL in terms of time and distance assuming CLB mode. This FL is defaulted to the FCU target altitude or it may be manually inserted. The level arrow on the ND assumes the current AP engaged mode. This information is to be used to rapidly answer to ATC: "CAN YOU MAKE FL XXX by ZZZ waypoint?". The crew will use a PD (Place/Distance), i.e. ZZZ,-10 waypoint if the question is "CAN YOU MAKE FL XXX , 10 nm before ZZZ point?"

LATERAL NAVIGATION

Ident.: NO-060-00005497.0001001 / 26 MAR 08

Applicable to: ALL

If the aircraft is following the programmed SID, the AP/FD should be in NAV. If ATC vectors the aircraft, HDG will be used until a time when clearance is given to either resume the SID or track direct to a specific waypoint. In either case, the crew must ensure that the waypoints are properly sequenced.

The crew should keep in mind that the use of HDG mode e.g. following ATC radar vectors, will revert CLB to OP CLB and any altitude constraints in the MCDU F-PLN page will not be observed unless they are selected on the FCU.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS
CLIMB

10 000 FT FLOW PATTERN

Ident.: NO-060-00005498.0001001 / 26 MAR 08
Applicable to: ALL

10 000 ft FLOW PATTERN



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

CRUISE

PREFACE

Ident.: NO-070-00005499.0002001 / 26 MAR 08

Applicable to: ALL

Once the cruise flight level is reached, "ALT CRZ" is displayed on the FMA. The cruise Mach number is targeted and cruise fuel consumption is optimized.

FMS USE

Ident.: NO-070-00005500.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

CRUISE FL

If the aircraft is cleared to a lower cruise flight level than the pre-planned cruise flight level displayed on MCDU PROG page, the cruise Mach number will not be targeted. The crew will update the MCDU PROG page accordingly.

When at cruise FL, the AP altitude control is soft. This means that the AP will allow small altitude variation around the cruise altitude (typically ± 50 ft) to keep cruise Mach before a readjustment of thrust occurs. This optimizes the fuel consumption in cruise.

WIND AND TEMPERATURE

When reaching cruise FL, the crew will ensure that the wind and temperatures are correctly entered and the lateral and vertical F-PLN reflect the CFP. Wind entries should be made at waypoints when there is a difference of either 30 ° or 30 kt for the wind data and 5 °C for temperature deviation. This will ensure that the FMS fuel and time predictions are as accurate as possible.

FMS USE

Ident.: NO-070-00005500.0002001 / 26 MAY 08

Applicable to: MSN 1320-2180

CRUISE FL

If the aircraft is cleared to a lower cruise flight level than the pre-planned cruise flight level displayed on MCDU PROG page, the cruise Mach number will not be targeted. The crew will update the MCDU PROG page accordingly.


When at cruise FL, the AP altitude control is soft. This means that the AP will allow small altitude variation around the cruise altitude (typically ± 50 ft) to keep cruise Mach before a readjustment of thrust occurs. This optimizes the fuel consumption in cruise.

WIND AND TEMPERATURE

When reaching cruise FL, the crew will ensure that the wind and temperatures are correctly entered and the lateral and vertical F-PLN reflect the CFP. Wind entries should be made at waypoints when there is a difference of either 30 ° or 30 kt for the wind data and 5 °C for temperature deviation. These entries should be made for as many levels as possible to reflect the actual wind and temperature profile. This will ensure that the FMS fuel and time predictions are as accurate as possible and provide an accurate OPT FL computation.

STEP CLIMB

If there is a STEP in the F-PLN, the crew will ensure that the wind is properly set at the first waypoint beyond the step (D on the following example) at both initial FL and step FL.

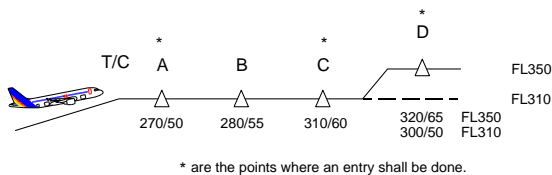

If at D waypoint, the CFP provides the wind at FL 350 but not at FL 310, it is recommended to insert the same wind at FL 310 as the one at FL 350. This is due to wind propagation rules, which might affect the optimum FL computation.


ETP

ETP function should be used to assist the crew in making a decision should an en-route diversion be required. Suitable airport pairs should be entered on the ETP page and the FMS will then calculate the ETP. Each time an ETP is sequenced, the crew should insert the next suitable diversion airfield.

The SEC F-PLN is a useful tool and should be used practically. The ETP should be inserted in the SEC F-PLN as a PD (Place/Distance) and the route to diversion airfield should be finalized. By programming a potential en-route diversion, the crew would reduce their workload should a failure occur. This is particularly true when terrain considerations apply to the intended diversion route. When an ETP is sequenced, the crew will

- Access the ETP page
- Insert the next applicable diversion airfield with associated wind
- Read new ETP

- Insert new ETP as a PD
- Copy active on the SEC F-PLN
- Insert the new diversion as New Dest in the SEC F-PLN from new ETP

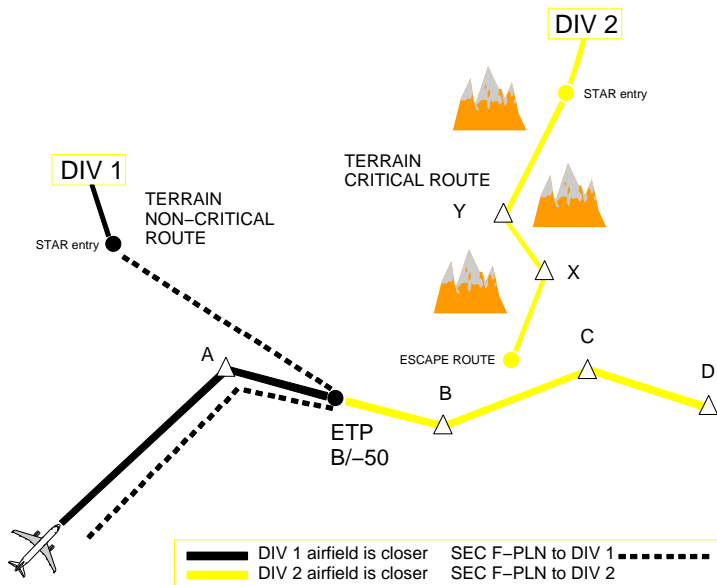

The DATA/Stored Routes function in the MCDU can be used to store up to five possible diversion routes. These routes can be entered into the SEC F-PLN using the SEC INIT prompt. This prompt will only be available if the SEC F-PLN is deleted. Refer to *FCOM/DSC-22_20-60-40 USING THE SECONDARY FLIGHT PLAN FUNCTION* for further information.

CLOSEST AIRPORT

For diversion purpose, the crew can also use the CLOSEST AIRPORT page which provides valuable fuel/time estimates to the four closest airports from the aircraft position, as well as to an airport the crew may define. The fuel and time predictions are a function of the average wind between the aircraft and the airport.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

CRUISE

FMS USE: MISCELLANEOUS

Ident.: NO-070-00005501.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

If ATC modifies the routing, the crew will revise the F-PLN. Once achieved and if printer is installed, the crew may perform a new F-PLN print.

If there is weather, the crew will use the OFFSET function which can be accessed from a lateral revision at PPOS. The crew will determine how many NM are required to avoid the weather. Once cleared by ATC, the crew will insert the offset.

FMS USE: MISCELLANEOUS

Ident.: NO-070-00005501.0002001 / 26 MAY 08

Applicable to: MSN 1320-2180

If ATC requires a position report, the crew will use the REPORT page which can be accessed from PROG page.

If ATC modifies the routing, the crew will revise the F-PLN. Once achieved and if printer is installed, the crew may perform a new F-PLN print.

ATC requires a report on a given radial, the crew will use the FIX INFO page which can be accessed from a lateral revision on F-PLN page at PPOS.

If ATC requires a report at a given time, the crew will insert a time marker pseudo waypoint.

If there is weather, the crew will use the OFFSET function which can be accessed from a lateral revision at PPOS. The crew will determine how many NM are required to avoid the weather. Once cleared by ATC, the crew will insert the offset.

If ATC gives a DIR TO clearance to a waypoint far from present position, the crew will use the ABEAM facility. This facility allows both a better crew orientation and the previously entered winds to be still considered.

COST INDEX

Ident.: NO-070-00005502.0001001 / 26 MAR 08

Applicable to: ALL

The Cost Index (CI) is used to take into account the relationship between fuel and time related costs in order to minimize the trip cost. The CI is calculated by the airline for each sector. From an operational point of view, the CI affects the speeds (ECON SPEED/MACH) and cruise altitude (OPT ALT). CI=0 corresponds to maximum range whereas the CI=999 corresponds to minimum time.

The CI is a strategic parameter which applies to the whole flight. However, the CI can

be modified by the crew in flight for valid strategic operational reasons. For example, if the crew needs to reduce the speed for the entire flight to comply with curfew requirements or fuel management requirements (XTRA gets close to 0), then it is appropriate to reduce the CI.

The SEC F-PLN can be used to check the predictions associated with new CI. If they are satisfactory, the crew will then modify the CI in the primary The SEC F-PLN can be used to check the predictions associated with new CI. If they are satisfactory, the crew will then modify the CI in the primary F-PLN. However, the crew should be aware that any modification of the CI would affect trip cost. However, the crew should be aware that any modification of the CI would affect trip cost.

SPEED CONSIDERATIONS

Ident.: NO-070-00005503.0002001 / 26 MAR 08

Applicable to: ALL

The cruise speed may be either:

- Managed
- Selected

MANAGED

When the cruise altitude is reached, the A/THR operates in SPEED/MACH mode. The optimum cruise Mach number is automatically targeted. Its value depends on:

- CI
- Cruise flight level
- Temperature deviation
- Weight
- Headwind component.

The crew should be aware that the optimum Mach number will vary according to the above mentioned parameters, e.g. it will increase with an increasing headwind, e.g. +50 kt head wind equates to M +0.01.

Should ATC require a specific time over a waypoint, the crew can perform a vertical revision on that waypoint and enter a time constraint. The managed Mach number would be modified accordingly to achieve this constraint. If the constraint can be met within a tolerance, a magenta asterix will be displayed on the MCDU; if the constraint cannot be met, an amber asterix will be displayed. Once the constrained waypoint is sequenced, the ECON Mach is resumed.

SELECTED

Should ATC require a specific cruise speed or turbulence penetration is required, the

pilot must select the cruise speed on the FCU. FMS predictions are updated accordingly until reaching either the next step climb or top of descent, where the programmed speeds apply again. The FMS predictions are therefore realistic. At high altitude, the speed should not be reduced below GREEN DOT as this may create a situation where it is impossible to maintain speed and/or altitude as the increased drag may exceed the available thrust.

ALTITUDE CONSIDERATIONS

Ident.: NO-070-00005504.0001001 / 26 MAR 08

Applicable to: ALL

The MCDU PROG page displays:

- REC MAX FL
- OPT FL.

REC MAX FL

REC MAX FL reflects the present engine and wing performance and does not take into account the cost aspect. It provides a 0.3 gbuffet margin. If the crew inserts a FL higher than REC MAX into the MCDU, it will be accepted only if it provides a buffet margin greater than 0.2 g. Otherwise, it will be rejected and the message "CRZ ABOVE MAX FL" will appear on the MCDU scratchpad. Unless there are overriding operational considerations, e.g. either to accept a cruise FL higher than REC MAX or to be held significantly lower for a long period, REC MAX should be considered as the upper cruise limit.

OPT FL

OPT FL displayed on the MCDU is the cruise altitude for minimum cost when ECON MACH is flown and should be followed whenever possible. It is important to note that the OPT FL displayed on the PROG page is meaningful only if the wind and temperature profile has been accurately entered. The crew should be aware that flying at a level other than the OPT FL would adversely affect the trip cost.

For each Mach number, there will be a different OPT FL. Should an FMGS failure occur, the crew should refer to the FCOM or QRH to determine the OPT FL. FCOM and QRH charts are only provided for two different Mach numbers.

STEP CLIMB

Ident.: NO-070-00005505.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852


Since the optimum altitude increases as fuel is consumed during the flight, from a cost

point of view, it is preferable to climb to a higher cruise altitude when the aircraft weight permits. This technique, referred to as a Step Climb, is typically accomplished by initially climbing approximately 2 000 ft above the optimum altitude and then cruising at that flight level until approximately 4 000 ft below optimum.

The MCDU STEP ALT page may be called a vertical revision from the MCDU F-PLN page or from the MCDU PERF CRZ page. Step climb can either be planned at waypoint (STEP AT) or be optimum step point calculated by the FMGS (ALT). If predictions are satisfactory in term of time and fuel saving, the crew will insert it in F-PLN provided it is compatible with ATC.

It may be advantageous to request an initial cruise altitude above optimum if altitude changes are difficult to obtain on specific routes. This minimizes the possibility of being held at a low altitude and high fuel consumption condition for long periods of time. The requested/cleared cruise altitude should be compared to the REC MAX altitude. Before accepting an altitude above optimum, the crew should determine that it will continue to be acceptable considering the projected flight conditions such as turbulence, standing waves or temperature change.

OPT FL follow up

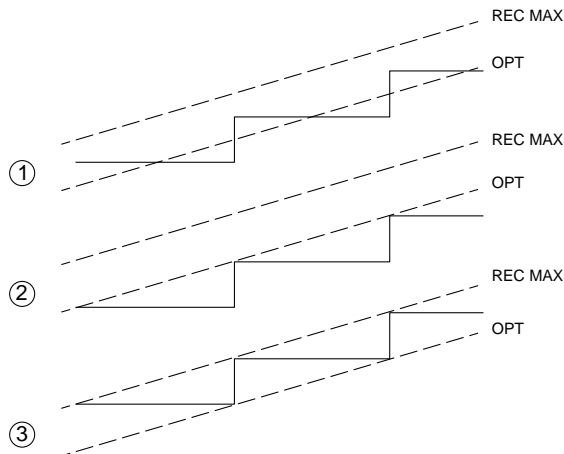

The diagram above shows three step climb strategies with respect to OPT and REC MAX FL. Strategy 1 provides the best trip cost, followed by 2 then 3.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

CRUISE

STEP CLIMB


Ident.: NO-070-00005505.0002001 / 26 MAR 08

Applicable to: MSN 1320-2180

Since the optimum altitude increases as fuel is consumed during the flight, from a cost point of view, it is preferable to climb to a higher cruise altitude when the aircraft weight permits. This technique, referred to as a Step Climb, is typically accomplished by initially climbing approximately 2 000 ft above the optimum altitude and then cruising at that flight level until approximately 4 000 ft below optimum.

The MCDU STEP ALT page may be called a vertical revision from the MCDU F-PLN page or from the MCDU PERF CRZ page. Step climb can either be planned at waypoint (STEP AT) or be optimum step point calculated by the FMGS (ALT). If predictions are satisfactory in term of time and fuel saving, the crew will insert it in F-PLN provided it is compatible with ATC.

The OPT STEP computation will be accurate if vertical wind profile has been properly entered. Refer to FMS USE of this section. *Refer to FCOM/PER-CRZ-AEO-ALT-20 WIND ALTITUDE TRADE FOR CONSTANT SPECIFIC RANGE* to provide valuable tables to assess the effect of the vertical wind profile on the optimum cruise flight level. It may be advantageous to request an initial cruise altitude above optimum if altitude changes are difficult to obtain on specific routes. This minimizes the possibility of being held at a low altitude and high fuel consumption condition for long periods of time. The requested/cleared cruise altitude should be compared to the REC MAX altitude. Before accepting an altitude above optimum, the crew should determine that it will continue to be acceptable considering the projected flight conditions such as turbulence, standing waves or temperature change.

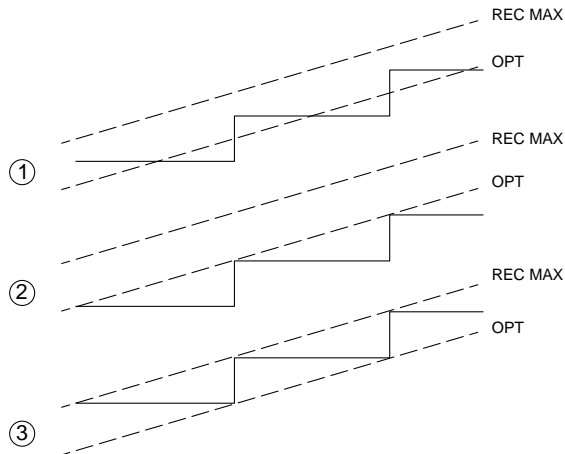OPT FL follow up


The diagram above shows three step climb strategies with respect to OPT and REC MAX FL. Strategy 1 provides the best trip cost, followed by 2 then 3.

EFFECT OF ALTITUDE ON FUEL CONSUMPTION

Ident.: NO-070-00005506.0001001 / 26 MAR 08

Applicable to: ALL

The selected cruise altitude should normally be as close to optimum as possible. As deviation from optimum cruise altitude increases, performance economy decreases. The following table provide average specific range penalty when not flying at optimum altitude.

FUEL MONITORING

Ident.: NO-070-00005508.0001001 / 26 MAR 08

Applicable to: ALL

The flight plan fuel burn from departure to destination is based on certain assumed conditions. These include gross weight, cruise altitude, route of flight, temperature, cruise wind and cruise speed. Actual fuel consumption should be compared with the flight plan fuel consumption at least once every 30 min.

The crew should be aware that many factors influence fuel consumption, such as actual flight level, cruise speed and unexpected meteorological conditions. These parameters

should normally be reflected in the FMS.

The crew must keep in mind that

- A significant deviation between planned and actual fuel figures without reason
- An excessive fuel flow leading to a potential imbalance
- An abnormal decrease in total fuel quantity (FOB+FU)

May indicate a fuel leak and the associated procedure should be applied.

FUEL TEMPERATURE

Ident.: NO-070-00005509.0001001 / 26 MAR 08

Applicable to: ALL

Fuel freeze refers to the formation of wax crystals suspended in the fuel, which can accumulate when fuel temperature is below the freeze point (-47°C for jet A1) and can prevent proper fuel feed to the engines.

During normal operations, fuel temperature rarely decreases to the point that it becomes limiting. However, extended cruise operations increase the potential for fuel temperatures to reach the freeze point. Fuel temperature will slowly reduce towards TAT. The rate of cooling of fuel can be expected to be in the order of 3°C per hour with a maximum of 12°C per hour in the most extreme conditions.

If fuel temperature approaches the minimum allowed, the ECAM outputs a caution.

Consideration should be given to achieving a higher TAT:

- Descending or diverting to a warmer air mass may be considered. Below the tropopause, a 4 000 ft descent gives a 7°C increase in TAT. In severe cases, a descent to as low as 25 000 ft may be required.
- Increasing Mach number will also increase TAT. An increase of M 0.01 produces approximately 0.7°C increase in TAT.

In either case, up to 1 h may be required for fuel temperature to stabilise. The crew should consider the fuel penalty associated with either of these actions.

APPROACH PREPARATION

routing.

The FMGS will be programmed as follows:



F-PLN

Lateral:

- Landing runway, STAR, Approach and Go-around procedure.
- F-PLN to alternate.


Vertical:

- Altitude and Speed constraints,
- Compare vertical F-PLN on MCDU with approach chart

MCDU F-PLN page vs approach chart crosscheck

FROM	UTC	NO SEQ	→
T-P	1432	161 / 3000	
	BRG319°	1NM	
CD33R	1435	161 / * 3000	
C324°	TRK324°	4 3.1	
FD33R	1437	161 / * 1520	
C324°		3 3.1	
MD33R	1438	137 / 1550	
C324°		5	
TOUΔ	---	--- / + 900	
DEST	TIME	DIST	EFBO
LFBO33R	1438	8	4.6

Compare vertical
F-PLN on MCDU
with Approach Chart

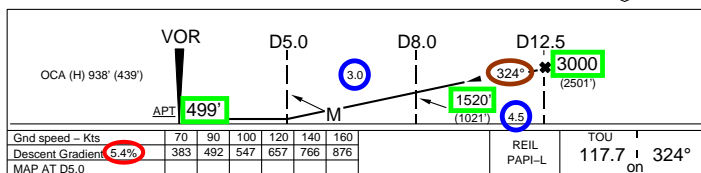

RAD NAV

Manually tune the VOR/DME and/or NDB if required. Check ILS ident, frequency

and associated course of destination airfield as required. It is not recommended manually forcing the ILS identifier as, in case of late runway change, the associated ILS would not be automatically tuned.

PROG

Insert VOR/DME or landing runway threshold of destination airfield in the BRG/DIST field as required.

PERF

PERF APPR:

- Descent winds,
- Destination airfield weather (QNH, Temperature and wind) The entered wind should be the average wind given by the ATC or ATIS. Do not enter gust values, for example, if the wind is 150 kt/20-25 kt, insert the lower speed 150 kt/20 kt (With managed speed mode in approach, ground speed mini-function will cope with the gusts).
- Minima (DH for CATII or CATIII approach and MDA for others approaches)
- Landing configuration (wind shear anticipated or in case of failure).

PERF GO AROUND: Check thrust reduction and acceleration altitude.

FUEL PRED

Check estimated landing weight, EFOB and extra fuel.

SEC F-PLN

To cover contingencies e.g. runway change, circling or diversion.


Once the FMGS has been programmed, the PNF should then cross check the information prior to the Approach briefing.

APPROACH BRIEFING

Ident.: NO-070-00005511.0001001 / 26 MAY 08

Applicable to: ALL

The main objective of the approach briefing is for the PF to inform the PNF of his intended course of action for the approach. The briefing should be practical and relevant to the actual weather conditions expected. It should be concise and conducted in a logical manner. It should be given at a time of low workload if possible, to enable the crew to concentrate on the content. It is very important that any misunderstandings are resolved at this time.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS CRUISE
---	---

PF briefing	Associated cross check
Aircraft type and technical status	
NOTAM	
Weather	
<ul style="list-style-type: none"> - Accessibility - Runway in use 	
Fuel	
<ul style="list-style-type: none"> - Extra fuel 	FUEL PRED page
Descent	
<ul style="list-style-type: none"> - TOD (time, position) - MORA, STAR, MSA - Altitude and speed constraints 	F-PLN page F-PLN page
Holding (if expected)	
<ul style="list-style-type: none"> - Entry in holding pattern - MHA and MAX speed 	
Approach	
<ul style="list-style-type: none"> - Approach type - Altitude and FAF identification - Glide path - MDA/DH - Missed approach procedure - Alternate considerations 	<ul style="list-style-type: none"> - PERF APPR and ND - F-PLN - PFD/FMA - PERF APPR - F-PLN - F-PLN
Landing	
<ul style="list-style-type: none"> - Runway condition, length and width - Tail strike awareness - Use of Auto brake - Expected taxi route 	
Radio aids	RAD NAV



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

CRUISE

Intentionally left blank

PREFACE

Ident.: NO-080-00005512.0001001 / 26 MAR 08

Applicable to: ALL

The PF will set preferably the MCDU PROG or PERF page as required (PROG page provides VDEV in NAV mode and BRG/DIST information, PERF DES page provides predictions down to any inserted altitude in DES/OP DES modes) whereas the PNF will set the MCDU F-PLN page.

If use of radar is required, consider selecting the radar display on the PF side and TERR on PNF side only.

COMPUTATION PRINCIPLES


Ident.: NO-080-00005513.0001001 / 26 MAR 08

Applicable to: ALL

TOD AND PROFILE COMPUTATION

The FMGS calculates the Top Of Descent point (TOD) backwards from a position 1 000 ft on the final approach with speed at VAPP. It takes into account any descent speed and altitude constraints and assumes managed speed is used. The first segment of the descent will always be idle segment until the first altitude constraint is reached. Subsequent segments will be "geometric", i.e. the descent will be flown at a specific angle, taking into account any subsequent constraints. If the STAR includes a holding pattern, it is not considered for TOD or fuel computation. The TOD is displayed on the ND track as a white symbol:

descent path

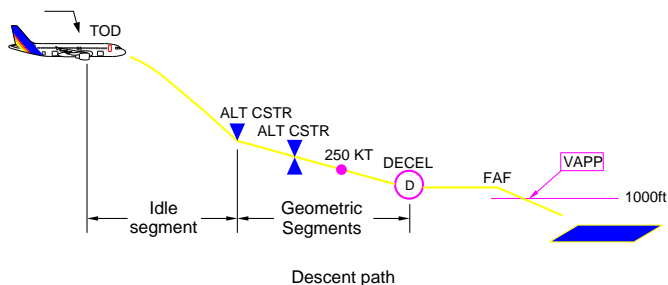

The idle segment assumes a given managed speed flown with idle thrust plus a small amount of thrust. This gives some flexibility to keep the aircraft on the descent path if engine anti-ice is used or if winds vary. This explains THR DES on the FMA.

The TOD computed by the FMS is quite reliable provided the flight plan is properly documented down to the approach.

MANAGED DESCENT SPEED PROFILE

The managed speed is equal to:

- The ECON speed (which may have been modified by the crew on the PERF DES page, before entering DESCENT phase), or
- The speed constraint or limit when applicable.

GUIDANCE AND MONITORING

Ident.: NO-080-00005514.0001001 / 26 MAR 08

Applicable to: ALL

INTRODUCTION

To carry out the descent, the crew can use either the managed descent mode (DES) or the selected descent modes (OP DES or V/S). Both descent modes can be flown either with selected speed or managed speed.

The modes and monitoring means are actually linked.

The managed DES mode guides the aircraft along the FMS pre-computed descent profile, as long as it flies along the lateral F-PLN: i.e. DES mode is available if NAV is engaged. As a general rule when DES mode is used, the descent is monitored using VDEV called "yoyo" on PFD, or its digital value on the PROG page, as well as the level arrow on the ND.

The selected OP DES or V/S modes are used when HDG is selected or when ALT CSTR may be disregarded or for various tactical purposes. As a general rule when OP DES or V/S modes are used, the descent is monitored using the Energy Circle, (displayed if HDG or TRK modes and indicating the required distance to descend, decelerate and land from present position) and the level arrow on the ND. When the aircraft is not far away from the lateral F-PLN (small XTK), the yoyo on PFD is also a good indicator.

MANAGED DESCENT MODE

The managed descent profile from high altitude is approximately 2.5 °.

As an estimation of the distance to touchdown is required to enable descent profile monitoring, it is important to ensure that the MCDU F-PLN plan page reflects the expected approach routing. Any gross errors noted in the descent profile are usually a result of incorrect routing entered in the MCDU or non-sequencing of F-PLN waypoints, giving a false distance to touchdown.

DESCENT INITIATION

To initiate a managed descent, the pilot will set the ATC cleared altitude on the FCU and push the ALT selector. DES mode engages and is annunciated on the FMA. If an early descent were required by ATC, DES mode would give 1 000 ft/min rate of descent, until regaining the computed profile.


To avoid overshooting the computed descent path, it is preferable to push the FCU ALT selector a few miles prior to the calculated TOD. This method will ensure a controlled entry into the descent and is particularly useful in situations of high cruise Mach number or strong upper winds.

If the descent is delayed, a "DECELERATE" message appears in white on the PFD and in amber on the MCDU. Speed should be reduced towards green dot, and when cleared for descent, the pilot will push for DES and push for managed speed. The speed reduction prior to descent will enable the aircraft to recover the computed profile more quickly as it accelerates to the managed descent speed.

DESCENT PROFILE

When DES with managed speed is engaged, the AP/FD guides the aircraft along the pre-computed descent path determined by a number of factors such as altitude constraints, wind and descent speed. However, as the actual conditions may differ from those planned, the DES mode operates within a 20 kt speed range around the managed target speed to maintain the descent path.

managed descent: speed target range principle

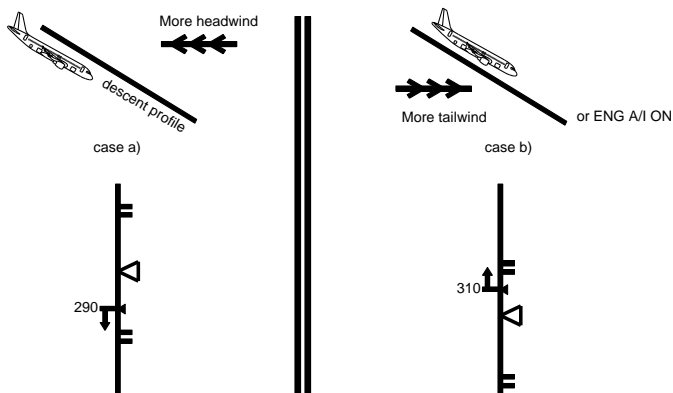


- If the aircraft gets high on the computed descent path:

- The speed will increase towards the upper limit of the speed range, to keep the aircraft on the path with IDLE thrust.
- If the speed reaches the upper limit, THR IDLE is maintained, but the autopilot does not allow the speed to increase any more, thus the VDEV will slowly increase.
- A path intercept point, which assumes half speedbrake extension, will be displayed on the ND descent track.
- If speed brakes are not extended, the intercept point will move forward. If it gets close to an altitude-constrained waypoint, then a message "AIR BRAKES" or "MORE DRAG", depending of the FMGS standard, will be displayed on the PFD and MCDU.


This technique allows an altitude constraint to be matched with minimum use of speedbrakes.

When regaining the descent profile, the speedbrakes should be retracted to prevent the A/THR applying thrust against speedbrakes. If the speedbrakes are not retracted, the "SPD BRK" message on the ECAM memo becomes amber and "RETRACT SPEEDBRAKES" is displayed in white on the PFD.

A/C above descent path

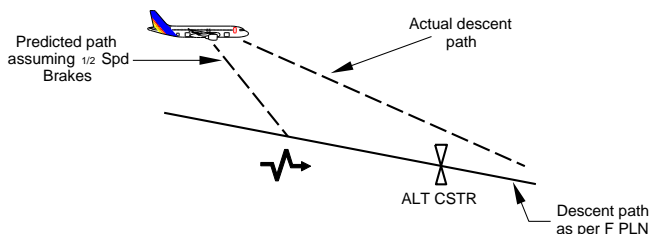

- **If the aircraft gets low on the computed descent path:**
 The speed will decrease towards the lower limit of the speed range with idle thrust. When the lower speed limit is reached the A/THR will revert to SPEED/MACH mode and apply thrust to maintain the descent path at this lower speed. The path intercept point will be displayed on the ND, to indicate where the descent profile will be regained.

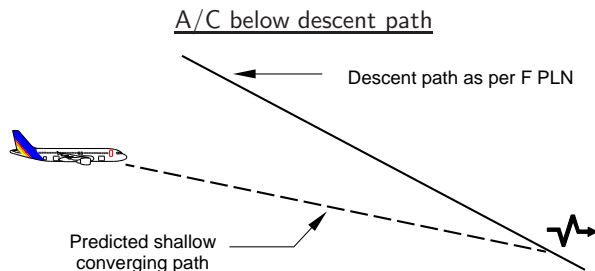

● **If selected speed is used:**

The descent profile remains unchanged. As the selected speed may differ from the speed taken into account for pre-computed descent profile and speed deviation range does not apply, the aircraft may deviate from the descent profile e.g. if the pilot selects 275 kt with a pre-computed descent profile assuming managed speed 300 kt, VDEV will increase.

SELECTED DESCENT

There are 2 modes for flying a selected descent, namely OP DES and V/S. These modes will be used for pilot tactical interventions.

V/S mode is automatically selected when HDG or TRK mode is selected by the pilot, while in DES mode. Furthermore, in HDG or TRK mode, only V/S or OP DES modes are available for descent.

To initiate a selected descent, the pilot should set the ATC cleared altitude on the FCU and pull the ALT selector. OP DES mode engages and is annunciated on the FMA. In OP DES mode, the A/THR commands THR IDLE and the speed is controlled by the THS.

Speed may be either managed or selected. In managed speed, the descent speed is displayed only as a magenta target but there is no longer a speed target range since the pre-computed flight profile does not apply.

The AP/FD will not consider any MCDU descent altitude constraints and will fly an unrestricted descent down to the FCU selected altitude.

If the crew wishes to steep the descent down, OP DES mode can be used, selecting a higher speed. Speedbrake is very effective in increasing descent rate but should be used with caution at high altitude due to the associated increase in VLS.

If the pilot wishes to shallow the descent path, V/S can be used. A/THR reverts to SPEED mode. In this configuration, the use of speedbrakes is not recommended to reduce speed, since this would lead to thrust increase and the speed would be maintained.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

DESCENT

MODE REVERSION

Ident.: NO-080-00005515.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

If a high V/S target is selected, the autopilot will pitch the aircraft down to fly the target V/S. Thus the aircraft will tend to accelerate, while A/THR commands idle thrust to try to keep the speed. When IAS will reach a speed close to VMO or VFE, the descent mode will revert to OP DES to regain the initial target speed.

MODE REVERSION

Ident.: NO-080-00005515.0002001 / 26 MAR 08

Applicable to: MSN 1320-1777

If a high V/S target is selected (or typically after a DES to V/S reversion), the autopilot will pitch the aircraft down to fly the target V/S. Thus the aircraft will tend to accelerate, while A/THR commands idle thrust to try to keep the speed. When IAS will reach a speed close to VMO or VFE, the autopilot will pitch the aircraft up, so as to fly a V/S allowing VMO or VFE to be maintained with idle thrust.

MODE REVERSION

Ident.: NO-080-00005515.0005001 / 26 MAR 08

Applicable to: MSN 2180

If a high V/S target is selected (or typically after a DES to V/S reversion), the autopilot will pitch the aircraft down to fly the target V/S. Thus the aircraft will tend to accelerate, while A/THR commands idle thrust to try to keep the speed. When IAS will reach a speed close to VMO or VFE, the autopilot will pitch the aircraft up, so as to fly a V/S allowing VMO or VFE to be maintained with idle thrust.

Triple click will be triggered.


DESCENT CONSTRAINTS

Ident.: NO-080-00005516.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

Descent constraints may be automatically included in the route as part of an arrival procedure or they may be manually entered through the MCDU F-PLN page. The aircraft will attempt to meet these as long as DES mode is being used.

The crew should be aware that an ATC "DIR TO" clearance automatically removes the requirement to comply with the speed/altitude constraints assigned to the waypoints

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS DESCENT
---	--

deleted from the F-PLN.

Following the selection of HDG, DES mode will switch automatically to V/S, and altitude constraints will no longer be taken into account.

DESCENT CONSTRAINTS
Ident.: NO-080-00005516.0002001 / 26 MAR 08 Applicable to: MSN 1320-2180

Descent constraints may be automatically included in the route as part of an arrival procedure or they may be manually entered through the MCDU F-PLN page. The aircraft will attempt to meet these as long as DES mode is being used.

The crew should be aware that an ATC "DIR TO" clearance automatically removes the requirement to comply with the speed/altitude constraints assigned to the waypoints deleted from the F-PLN. However, if intermediate waypoints are relevant, e.g. for terrain awareness, then "DIR TO" with ABEAMS may be an appropriate selection as constraints can be re-entered into these waypoints if required.

Following the selection of HDG, DES mode will switch automatically to V/S, and altitude constraints will no longer be taken into account.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS


DESCENT

10 000 FT FLOW PATTERN

Ident.: NO-080-00005517.0001001 / 26 MAR 08

Applicable to: ALL

10 000 ft FLOW PATTERN

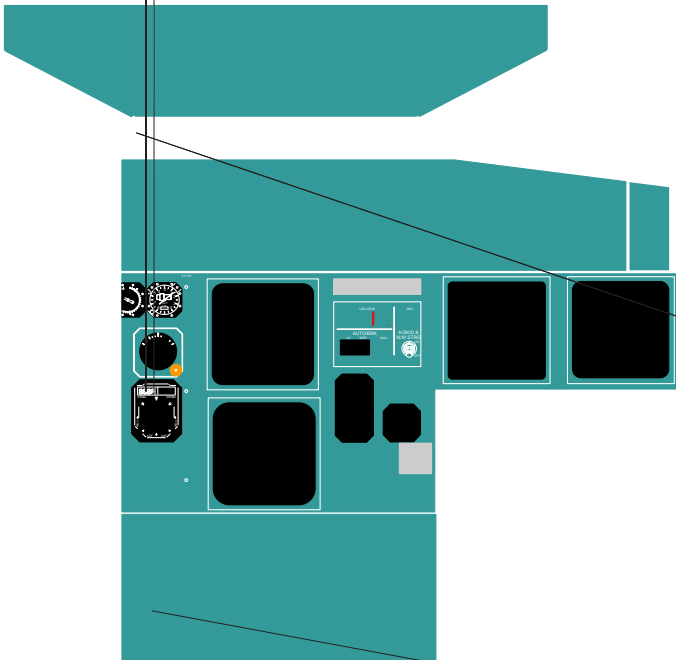



A318/A319/A320/A321

FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

divert. The crew should be aware that this information is computed with defined assumptions e.g.:

- Aircraft weight being equal to landing weight at primary destination
- Flight at FL 220 if distance to ALTN is less than 200 nm, otherwise FL 310 performed at maximum range speed.
- Constant wind (as entered in alternate field of the DES WIND page).
- Constant delta ISA (equal to delta ISA at primary destination)
- Airway distance for a company route, otherwise direct distance.

Alternate airport may be modified using the MCDU ALTN airport page which can be accessed by a lateral revision at destination.

To exit the holding pattern, the crew should select either:

- IMM EXIT (The aircraft will return immediately to the hold fix, exit the holding pattern and resume its navigation) or
- HDG if radar vectors or
- DIR TO if radar vectors or


PREFACE

Ident.: NO-100-00005521.0001001 / 26 MAR 08

Applicable to: ALL

This section covers general information applicable to all approach types. Techniques, which apply to specific approach types, will be covered in dedicated chapters. All approaches are divided into three parts (initial, intermediate and final) where various drills have to be achieved regardless of the approach type.

the approach parts and associated actions

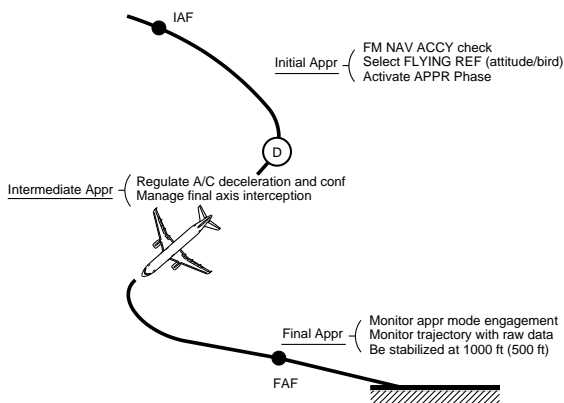

INITIAL APPROACH

Ident.: NO-100-00005522.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

NAVIGATION ACCURACY

Prior to any approach, a navigation accuracy check is to be carried out. On aircraft equipped with GPS however, no navigation accuracy check is required as long as GPS PRIMARY is available.

Without GPS PRIMARY or if no GPS is installed, navigation accuracy check has to be carried out. The navigation accuracy determines which AP modes the crew should use and the type of display to be shown on the ND.

THE FLYING REFERENCE

It is recommended to use the FD bars for ILS approaches and the FPV called "bird"

with FPD for non-precision or circling approach approaches.

APPROACH PHASE ACTIVATION

Activation of the approach phase will initiate a deceleration towards VAPP or the speed constraint inserted at FAF, whichever applies.

When in NAV mode with managed speed, the approach phase activates automatically when sequencing the deceleration pseudo-waypoint. If an early deceleration is required, the approach phase can be activated on the MCDU PERF APPR page.

When the approach phase is activated, the magenta target speed becomes VAPP. When in HDG mode, e.g. for radar vectoring, the crew will activate the approach phase manually.

There are two approach techniques:

- The decelerated approach
- The stabilized approach


THE DECELERATED APPROACH

This technique refers to an approach where the aircraft reaches 1 000 ft in the landing configuration at VAPP. In most cases, this equates to the aircraft being in CONF 1 and at S speed at the FAF. This is the preferred technique for an ILS approach. The deceleration pseudo-waypoint assumes a decelerated approach technique.

THE STABILIZED APPROACH

This technique refers to an approach where the aircraft reaches the FAF in the landing configuration at VAPP. This technique is recommended for non-precision approaches. To get a valuable deceleration pseudo waypoint and to ensure a timely deceleration, the pilot should enter VAPP as a speed constraint at the FAF.

STABILIZED VERSUS DECELERATED APPROACH

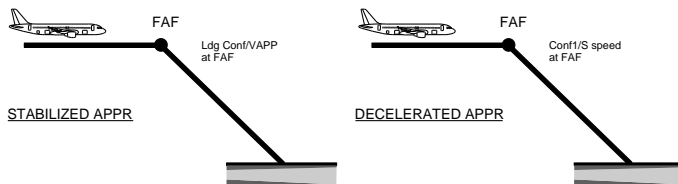

F-PLN SEQUENCING

When in NAV mode, the F-PLN will sequence automatically. In HDG/TRK mode, the F-PLN waypoints will sequence automatically only if the aircraft flies close to the

programmed route. Correct F-PLN sequencing is important to ensure that the programmed missed approach route is available in case of go-around and to ensure correct predictions. A good cue to monitor the proper F-PLN sequencing is the TO waypoint on the upper right side of the ND, which should remain meaningful. If under radar vectors and automatic waypoint sequencing does not occur, the F-PLN will be sequenced by either using the DIR TO RADIAL IN function or by deleting the FROM WPT on the F-PLN page until the next likely WPT to be over flown is displayed as the TO WPT on the ND.

INITIAL APPROACH

Ident.: NO-100-00005522.0002001 / 26 MAR 08

Applicable to: MSN 1320-2180

NAVIGATION ACCURACY

Prior to any approach, a navigation accuracy check is to be carried out. On aircraft equipped with GPS however, no navigation accuracy check is required as long as GPS PRIMARY is available. Without GPS PRIMARY or if no GPS is installed, navigation accuracy check has to be carried out. The navigation accuracy determines which AP modes the crew should use and the type of display to be shown on the ND.

THE FLYING REFERENCE

It is recommended to use the FD bars for ILS approaches and the FPV called "bird" with FPD for non-precision or circling approach approaches.

APPROACH PHASE ACTIVATION

Activation of the approach phase will initiate a deceleration towards VAPP or the speed constraint inserted at FAF, whichever applies.

When in NAV mode with managed speed, the approach phase activates automatically when sequencing the deceleration pseudo-waypoint. If an early deceleration is required, the approach phase can be activated on the MCDU PERF APPR page. When the approach phase is activated, the magenta target speed becomes VAPP.

When in HDG mode, e.g. for radar vectoring, the crew will activate the approach phase manually.

There are two approach techniques:

- The decelerated approach
- The stabilized approach


THE DECELERATED APPROACH

This technique refers to an approach where the aircraft reaches 1 000 ft in the landing configuration at VAPP. In most cases, this equates to the aircraft being in CONF 1 and at S speed at the FAF. This is the preferred technique for an ILS approach. The deceleration pseudo waypoint assumes a decelerated approach technique.

THE STABILIZED APPROACH

This technique refers to an approach where the aircraft reaches the FAF in the landing configuration at VAPP. This technique is recommended for non-precision approaches. To get a valuable deceleration pseudo waypoint and to ensure a timely deceleration, the pilot should enter VAPP as a speed constraint at the FAF.

STABILIZED VERSUS DECELERATED APPROACH

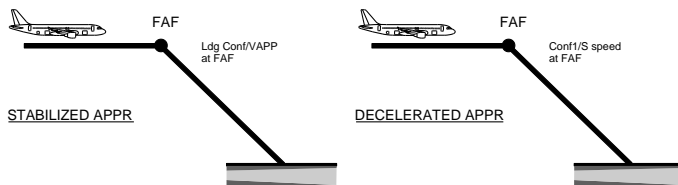

F-PLN SEQUENCING

When in NAV mode, the F-PLN will sequence automatically. In HDG/TRK mode, the F-PLN waypoints will sequence automatically only if the aircraft flies close to the programmed route. Correct F-PLN sequencing is important to ensure that the programmed missed approach route is available in case of go-around and to ensure correct predictions. A good cue to monitor the proper F-PLN sequencing is the TO waypoint on the upper right side of the ND, which should remain meaningful.

If under radar vectors and automatic waypoint sequencing does not occur, the F-PLN will be sequenced by either using the DIR TO RADIAL IN function or by deleting the FROM WPT on the F-PLN page until the next likely WPT to be over flown is displayed as the TO WPT on the ND.

Using DIR TO or DIR TO RADIAL IN function arms the NAV mode. If NAV mode is not appropriate, pull the HDG knob to disarm it.

INTERMEDIATE APPROACH

Ident.: NO-100-00005523.0001001 / 26 MAY 08

Applicable to: MSN 0781-0852

The purpose of the intermediate approach is to bring the aircraft at the proper speed, altitude and configuration at FAF.

DECELERATION AND CONFIGURATION CHANGE

Managed speed is recommended for the approach. Once the approach phase has been activated, the A/THR will guide aircraft speed towards the maneuvering speed of the current configuration, whenever higher than VAPP, e.g. green dot for CONFIG 0, S speed for CONFIG 1 etc.

To achieve a constant deceleration and to minimize thrust variation, the crew should extend the next configuration when reaching the next configuration maneuvering speed +10 kt (IAS must be lower than VFE next), e.g. when the speed reaches green dot +10 kt, the crew should select CONFIG 1. Using this technique, the mean deceleration rate will be approximately 10 kt/NM in level flight. This deceleration rate will be twice i.e. 20 kt/NM, with the use of the speedbrakes.

If selected speed is to be used to comply with ATC, the requested speed should be selected on the FCU. A speed below the manoeuvring speed of the present configuration may be selected provided it is above VLS. When the ATC speed constraint no longer applies, the pilot should push the FCU speed selector to resume managed speed.

When flying the intermediate approach in selected speed, the crew will activate the approach phase. This will ensure further proper speed deceleration when resuming managed speed; otherwise the aircraft will accelerate to the previous applicable descent phase speed.

In certain circumstances, e.g. tail wind or high weight, the deceleration rate may be insufficient. In this case, the landing gear may be lowered, preferably below 220 kt (to avoid gear doors overstress), and before selection of Flap 2. Speedbrakes can also be used to increase the deceleration rate but the crew should be aware of:

- The increase in VLS with the use of speedbrakes
- The limited effect at low speeds
- The speed brake auto-retraction when selecting CONF 3 (A321 only) or CONF full. (Not applicable for A318)

INTERCEPTION OF FINAL APPROACH COURSE

To ensure a smooth interception of final approach course, the aircraft ground speed should be appropriate, depending upon interception angle and distance to runway




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

APPROACH GENERAL

threshold. The pilot should refer to applicable raw data (LOC, needles), XTK information on ND and wind component for the selection of an appropriate IAS. If ATC provides radar vectors, the crew will sequence the F-PLN by checking that the TO WPT, on upper right hand corner of ND, is the most probable one and

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS APPROACH GENERAL
---	---

configuration may be selected provided it is above VLS. When the ATC speed constraint no longer applies, the pilot should push the FCU speed selector to resume managed speed.

When flying the intermediate approach in selected speed, the crew will activate the approach phase. This will ensure further proper speed deceleration when resuming managed speed; otherwise the aircraft will accelerate to the previous applicable descent phase speed.

In certain circumstances, e.g. tail wind or high weight, the deceleration rate may be insufficient. In this case, the landing gear may be lowered, preferably below 220 kt (to avoid gear doors overstress), and before selection of Flap 2. Speedbrakes can also be used to increase the deceleration rate but the crew should be aware of:

- The increase in VLS with the use of speedbrakes
- The limited effect at low speeds
- The speed brake auto-retraction when selecting the landing configuration. (Not applicable for A318)

INTERCEPTION OF FINAL APPROACH COURSE

To ensure a smooth interception of final approach course, the aircraft ground speed should be appropriate, depending upon interception angle and distance to runway threshold. The pilot should refer to applicable raw data (LOC, needles), XTK information on ND and wind component for the selection of an appropriate IAS. If ATC provides radar vectors, the crew will use the DIR TO RADIAL IN-BND facility. This ensures:

- A proper F-PLN sequencing
- A comprehensive ND display
- An assistance for lateral interception
- The VDEV to be computed on reasonable distance assumptions.


However, considerations should be given the following:

- A radial is to be inserted in the MCDU. In the following example, the final approach course is 90 ° corresponding to radial 270 °.
- Deceleration will not occur automatically as long as lateral mode is HDG

When established on the LOC, a DIR TO should not be performed to sequence the F-PLN as this will result in the FMGS reverting to NAV mode. In this case, the LOC will have to be re-armed and re-captured, increasing workload unduly.

The final approach course interception in NAV mode is possible if GPS is PRIMARY or if the navigation accuracy check is positive.

use of DIR TO radial in facility

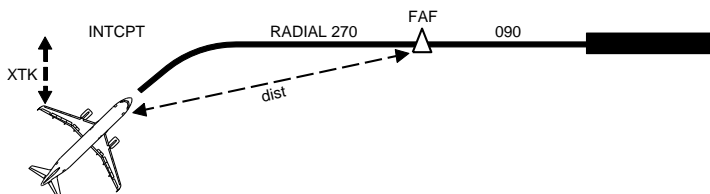

If ATC gives a new wind for landing, the crew will update it on MCDU PERF APPR page.

Once cleared for the approach, the crew will press the APPR P/B to arm the approach modes when applicable.

FINAL APPROACH

Ident.: NO-100-00005524.0001001 / 02 JUL 08

Applicable to: ALL

FINAL APPROACH MODE ENGAGEMENT MONITORING

The crew will monitor the engagement of G/S* for ILS approach, FINAL for fully managed NPA or will select the Final Path Angle (FPA) reaching FAF for selected NPA. If the capture or engagement is abnormal, the pilot will either use an appropriate selected mode or take over manually.

FINAL APPROACH MONITORING


The final approach is to be monitored through available data. Those data depends on the approach type and the result of the navigation accuracy check.

Approach type	Navigation accuracy check	Data to be monitored
ILS	-	LOC, GS deviation, DME and/or OM
Managed NPA	GPS primary	VDEV, XTK and F-PLN
Managed NPA	Non GPS PRIMARY	VDEV, XTK, Needles, DME and ALT
Selected NPA	Accuracy check negative	Needles, DME and ALT, Time

USE OF A/THR

The pilot should use the A/THR for approaches as it provides accurate speed control. The pilot will keep the hand on the thrust levers so as to be prepared to react if needed.

During final approach, the managed target speed moves along the speed scale as a

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS APPROACH GENERAL
---	---

function of wind variation. The pilot should ideally check the reasonableness of the target speed by referring to GS on the top left on ND. If the A/THR performance is unsatisfactory, the pilot should disconnect it and control the thrust manually. If the pilot is going to perform the landing using manual thrust, the A/THR should be disconnected by 1 000 ft on the final approach.

GO-AROUND ALTITUDE SETTING

When established on final approach, the go-around altitude must be set on FCU. This can be done at any time when G/S or FINAL mode engages. However, on a selected Non Precision Approach, i.e. when either FPA or V/S is used, the missed approach altitude must only be set when the current aircraft altitude is below the missed approach altitude, in order to avoid unwanted ALT*.

TRAJECTORY STABILIZATION

The first prerequisite for safe final approach and landing is to stabilize the aircraft on the final approach flight path laterally and longitudinally, in landing configuration, at VAPP speed, i.e:

- Only small corrections are necessary to rectify minor deviations from stabilized conditions
- The thrust is stabilized, usually above idle, to maintain the target approach speed along the desired final approach path

Airbus policy requires that stabilized conditions be reached at 1 000 ft above airfield elevation in IMC and 500 ft above airfield elevation in VMC.

If, for any reason, one flight parameter deviates from stabilized conditions, the PNF will make a callout as stated below:

Exceedance and associated PNF callout				
Parameter		Exceedance		Callout
IAS		VAPP +10 kt / -5 kt		"SPEED"
V/S		< -1 000 ft/min		"SINK RATE"
Pitch attitude		+10 ° / -2.5 ° ⁽¹⁾		"PITCH"
Bank angle		7 °		"BANK"
ILS only	Localizer	Excess Deviation	1/4 dot PFD	"LOCALIZER"
	Glide slope		1 dot PFD	"GLIDE SLOPE"
NPA only	Course	Excess deviation: ½ dot on PFD (or 2.5 ° (VOR)/5 ° (ADF))		"COURSE"
	Altitude at check points	Deviation		" xFT HIGH (LOW)"

(1) The pitch attitude upper threshold becomes +7.5 ° or A321.

Following a PNF flight parameter exceedance call out, the suitable PF response will

be:

- Acknowledge the PNF callout, for proper crew coordination purposes
- Take immediate corrective action to control the exceeded parameter back into the defined stabilized conditions
- Assess whether stabilized conditions will be recovered early enough prior to landing, otherwise initiate a go-around.

REACHING THE MINIMA

Decision to land or go-around must be made at MDA/DH at the latest. Reaching the MDA/DH, at MINIMUM call out:

- If appropriate visual reference can be maintained and the aircraft is properly established, continue and land.
- If not, go-around.

The MDA/DH should not be set as target altitude on the FCU. If the MDA/DH were inserted on the FCU, this would cause a spurious ALT* when approaching MDA/DH, resulting in the approach becoming destabilised at a critical stage.

AP DISCONNECTION

During the final approach with the AP engaged, the aircraft will be stabilised.

Therefore, when disconnecting the AP for a manual landing, the pilot should avoid the temptation to make large inputs on the sidestick.

The pilot should disconnect the autopilot early enough to resume manual control of the aircraft and to evaluate the drift before flare. During crosswind conditions, the pilot should avoid any tendency to drift downwind.

Some common errors include:

- Descending below the final path, and/or
- reducing the drift too early.

VAPP

Ident.: NO-100-00005525.0004001 / 26 MAR 08

Applicable to: ALL

The approach speed (VAPP) is defined by the crew to perform the safest approach. It is function of gross weight, configuration, headwind, A/THR ON/OFF, icing and downburst.

$$VAPP = VLS + \Delta$$

{ Gross weight Configuration
 Max { 5 kts for severe icing
 5 kts for A/THR ON
 1/3 of steady headwind (limited to 15 kts)

In most cases, the FMGC provides valuable VAPP on MCDU PERF APPR page, once tower wind and FLAP3 or FLAP FULL landing configuration has been inserted (VAPP_{fmgc} = VLS + MAX of {5 kt, 1/3 tower head wind component on landing RWY in the F-PLN}).

The crew can insert a lower VAPP on the MCDU APPR page, down to VLS, if landing is performed with A/THR OFF, with no wind, no downburst and no icing.

He can insert a higher VAPP in case of strong suspected downburst, but this increment is limited to 15 kt above VLS.

In case of strong or gusty crosswind greater than 20 kt, VAPP should be at least VLS +5 kt; the 5 kt increment above VLS may be increased up to 15 kt at the flight crew's discretion.

The crew will bear in mind that the wind entered in MCDU PERF APPR page considers the wind direction to be in the same reference as the runway direction e. g. if airport is magnetic referenced, the crew will insert magnetic wind. The wind direction provided by ATIS and tower is given in the same reference as the runway direction whereas the wind provided by VOLMET, METAR or TAF is always true referenced.

VAPP is computed at predicted landing weight while the aircraft is in CRZ or DES phase. Once the approach phase is activated, VAPP is computed using current gross weight.

Managed speed should be used for final approach as it provides Ground Speed mini (GS mini) guidance, even when the VAPP has been manually inserted.

GROUND SPEED MINI

Ident.: NO-100-00005526.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

PURPOSE

The purpose of the ground speed mini function is to keep the aircraft energy level above a minimum value, whatever the wind variations or gusts.

This allows an efficient management of the thrust in gusts or longitudinal shears.

Thrust varies in the right sense, but in a smaller range ($\pm 15\%$ N1) in gusty situations, which explains why it is recommended in such situations.

It provides additional but rational safety margins in shears.

It allows pilots "to understand what is going on" in perturbed approaches by monitoring the target speed magenta bugs: when target goes up = head wind gust.

COMPUTATION

This minimum energy level is the energy the aircraft will have at landing with the expected tower wind; it is materialized by the ground speed of the aircraft at that time which is called GS mini:

$$GS \text{ mini} = VAPP - \text{Tower head wind component}$$


In order to achieve that goal, the aircraft ground speed should never drop below GS mini in the approach, while the winds are changing. Thus the aircraft IAS must vary while flying down, in order to cope with the gusts or wind changes. In order to make this possible for the pilot or for the A/THR, the FMGS continuously computes an IAS target speed, which ensures that the aircraft ground speed is at least equal to GS mini; the FMGS uses the instantaneous wind component experienced by the aircraft:




$$IAS \text{ Target Speed} = GS \text{ mini} + \text{Current headwind component}$$

This target speed is limited by VAPP in case of tailwind or if instantaneous wind is lower than the tower wind.

example

VLS=130 kts
Tower wind=20 kt Head wind
➤ $V_{app}=130 + 1/3 \text{ HW}$
=137 kt
➤ $GS \text{ mini}=V_{app} - \text{HW}$
=117 kt



(a) Current wind = tower wind	(b) Head wind gust	(c) Tailwind gust
Vapp is the IAS target Ground speed = GS mini	The IAS target increases The IAS increases GS mini is maintained Thrust slightly increases	The IAS target decreases (not below Vapp) The IAS decreases GS increases Thrust slightly decreases
		

GROUND SPEED MINI

Ident.: NO-100-00005526.0002001 / 26 MAR 08

Applicable to: MSN 1320-2180

PURPOSE

The purpose of the ground speed mini function is to keep the aircraft energy level above a minimum value, whatever the wind variations or gusts.

This allows an efficient management of the thrust in gusts or longitudinal shears.

Thrust varies in the right sense, but in a smaller range ($\pm 15\%$ N1) in gusty situations, which explains why it is recommended in such situations.

It provides additional but rational safety margins in shears.

It allows pilots "to understand what is going on" in perturbed approaches by monitoring the target speed magenta bugs: when target goes up = head wind gust.

COMPUTATION

This minimum energy level is the energy the aircraft will have at landing with the expected tower wind; it is materialized by the ground speed of the aircraft at that

time which is called GS mini:

$$GS \text{ mini} = VAPP - \text{Tower head wind component}$$


In order to achieve that goal, the aircraft ground speed should never drop below GS mini in the approach, while the winds are changing. Thus the aircraft IAS must vary while flying down, in order to cope with the gusts or wind changes. In order to make this possible for the pilot or for the A/THR, the FMGS continuously computes an IAS target speed, which ensures that the aircraft ground speed is at least equal to GS mini; the FMGS uses the instantaneous wind component experienced by the aircraft:




$$IAS \text{ Target Speed} = GS \text{ mini} + \text{Current headwind component}$$

This target speed is limited by VFE -5 in case of very strong gusts, by VAPP in case of tailwind or if instantaneous wind is lower than the tower wind.

example

VLS=130 kts
Tower wind=20 kt Head wind
➤ $V_{app}=130 + 1/3 \text{ HW}$
=137 kt
➤ $GS \text{ mini}=V_{app} - \text{HW}$
=117 kt



(a) Current wind = tower wind	(b) Head wind gust	(c) Tailwind gust
<p>Vapp is the IAS target</p> <p>Ground speed = GS mini</p> 	<p>The IAS target increases</p> <p>The IAS increases GS mini is maintained</p> <p>Thrust slightly increases</p> 	<p>The IAS target decreases (not below Vapp)</p> <p>The IAS decreases GS increases</p> <p>Thrust slightly decreases</p> 



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS
APPROACH GENERAL

Intentionally left blank



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

ILS APPROACH

PREFACE

Ident.: NO-110-00005529.0001001 / 26 MAY 08

Applicable to: ALL

This chapter deals with some characteristics of the ILS approach. Recommendations mentioned in APPROACH GENERAL chapter apply.

For CAT1 ILS, the crew will insert DA/DH values into MDA (or MDH if QFE function is available) field on the MCDU PERF APPR page, since these values are baro referenced.

For CATII or CATIII ILS, the crew will insert DH into DH field on MCDU PERF APPR page, since this value is a radio altitude referenced.

INITIAL APPROACH

Ident.: NO-110-00005531.0006001 / 17 JUN 08

Applicable to: ALL

NAVIGATION ACCURACY

APPROACH PHASE ACTIVATION

For a standard ILS, the crew should plan a decelerated approach. However, if the G/S angle is greater than 3.5 ° or if forecast tail wind at landing exceeds 10 kt (if permitted by the AFM), a stabilized approach is recommended.

If FAF is at or below 2 000 ft AGL and if deceleration is carried out using selected speed, the crew should plan a deceleration in order to be able to select CONFIG. 2 one dot below the G/S.

MISCELLANEOUS

The ILS or LS PB is to be checked pressed in the first stage of the approach. The crew will check that

- LOC and GS scales and deviations are displayed on PFD
- IDENT is properly displayed on the PFD. If no or wrong ident displayed, the crew will check the audio ident.

INTERMEDIATE APPROACH

Ident.: NO-110-00005533.0001001 / 26 MAR 08

Applicable to: ALL

INTERCEPTION OF FINAL APPROACH COURSE

When cleared for the ILS, the APPR pb should be pressed. This arms the approach mode and LOC and GS are displayed in blue on the FMA. At this stage the second AP, if available, should be selected.

If the ATC clears for a LOC capture only, the crew will press LOC p/b on the FCU. If the ATC clears for approach at a significant distance, e.g. 30 nm, the crew should be aware that the G/S may be perturbed and CAT 1 will be displayed on FMA till a valid Radio Altimeter signal is received.

FINAL APPROACH

Ident.: NO-110-00005534.0001001 / 03 JUL 08

Applicable to: ALL


GLIDE SLOPE INTERCEPTION FROM ABOVE

The following procedure should only be applied when established on the localizer. There are a number of factors which might lead to a glide slope interception from above. In such a case, the crew must react without delay to ensure the aircraft is configured for landing before 1 000 ft AAL. In order to get the best rate of descent when cleared by ATC and below the limiting speeds, the crew should lower the landing gear and select CONF 2. Speedbrakes may also be used, noting the

considerations detailed in the sub-section "Deceleration and configuration change" earlier in this chapter. The recommended target speed for this procedure is VFE 2 - 5 kt. When cleared to intercept the glide slope, the crew should:

- Press the APPR pb on FCU and confirm G/S is armed.
- Select the FCU altitude above aircraft altitude to avoid unwanted ALT*.
- Select V/S 1 500 ft/min initially. V/S in excess of 2 000 ft/min will result in the speed increasing towards VFE

A/C high above G/S - recommended g/s capture technique



It is vital to use V/S rather than OP DES to ensure that the A/THR is in speed mode rather than IDLE mode. The rate of descent will be carefully monitored to avoid exceeding VFE. When approaching the G/S, G/S* will engage. The crew will monitor the capture with raw data (pitch and G/S deviation). The go-around altitude will be set on the FCU and speed reduced so as to be configured for landing by 1 000 ft. In such a situation, taking into account the ground obstacles and if ATC permits, it may be appropriate to carry out a 360 ° turn before resuming the approach.

MISCELLANEOUS

Close to the ground, avoid large down corrections. Give priority to attitude and sink rate. (*Refer to NO-160 TAIL STRIKE AVOIDANCE*).

In case of a double receiver failure, the red LOC/GS flags are displayed, ILS scales are removed, the AP trips off and the FDs revert to HDG/VS mode.

In case of an ILS ground transmitter failure, the AP/FD with LOC/GS modes will remain ON. This is because such a failure is commonly transient. In such a case, ILS scales and FD bars are flashing. If R/A height is below 200 ft, the red LAND warning is triggered. If this failure lasts more than several seconds or in case of AUTOLAND warning, the crew must perform a go-around.



ILS RAW DATA

Ident.: NO-110-00005536.0001001 / 26 MAR 08

Applicable to: ALL

INITIAL APPROACH

FLYING REFERENCE

The "bird" is to be used as the flying reference.

APPROACH PHASE ACTIVATION

The approach technique is the stabilized approach.

INTERMEDIATE APPROACH


The TRK index will be set to the ILS course and, once established on the LOC, the tail of the bird should be coincident with the TRK index. This method allows accurate LOC tracking taking into account the drift.

Should the LOC deviate, the pilot will fly the bird in the direction of the LOC index, and when re-established on the LOC, set the tail of the bird on the TRK index again. If there is further LOC deviation, a slight IRS drift should be suspected. The bird is computed out of IRS data. Thus, it may be affected by IRS data drift amongst other TRK. A typical TRK error at the end of the flight is 1 ° to 2 °.

The ILS course pointer and the TRK diamond are also displayed on PFD compass.

FINAL APPROACH

When ½ dot below the G/S, the pilot should initiate the interception of the G/S by smoothly flying the FPV down to the glide path angle. The bird almost sitting on the -5 ° pitch scale on PFD, provides a -3 ° flight path angle. Should the G/S deviate, the pilot will make small corrections in the direction of the deviation and when re-established on the G/S, reset the bird to the G/S angle.

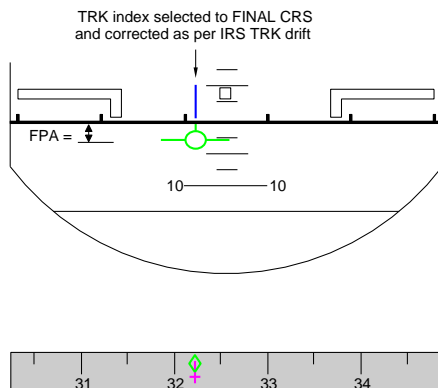



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

ILS APPROACH

Intentionally left blank

PREFACE

Ident.: NO-120-00005538.0001001 / 26 MAR 08

Applicable to: ALL

This chapter deals with some characteristics of the Non Precision Approach (NPA).
Recommendations mentioned *Refer to NO-100 PREFACE*.

NPA are defined as:

- VOR approach
- NDB approach
- LOC, LOC-BC approach
- R-NAV approach.

APPROACH STRATEGY

Ident.: NO-120-00005540.0001001 / 26 MAR 08

Applicable to: ALL

The overall strategy of NPA completion is to fly it "ILS alike" with the same mental image or representation and similar procedure. Instead of being referred to an ILS beam, the AP/FD guidance modes and associated monitoring data are referred to the FMS F-PLN consolidated by raw data. LOC only approach is the exception where LOC mode and localizer scale are to be used. This explains why the crew must ensure that the FMS data is correct, e.g. FMS accuracy, F-PLN (lateral and vertical) and proper leg sequencing.

The use of AP is recommended for all non-precision approaches as it reduces crew workload and facilitates monitoring the procedure and flight path.

LIMITATIONS


Ident.: NO-120-00005541.0001001 / 26 MAR 08

Applicable to: ALL

Lateral and vertical managed guidance (FINAL APP) can be used provided the following conditions are met:

- The approach is defined in the navigation database
- The approach has been crosschecked by the crew with the published procedure
- The final approach is not modified by the crew.

If one engine is inoperative, it is not permitted to use the autopilot to perform NPAs in the following modes: FINAL APP, NAV V/S, NAV/FPA. Only FD use is permitted
(*Refer to FCOM/LIM-22-10 USE OF NAV AND FINAL APP MODES FOR NON-*

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS NON PRECISION APPROACH
--	---

PRECISION APPROACH). In others words, if the use of the autopilot is preferred, its use will be limited to TRK/FPA or HDG/VS modes.

INITIAL APPROACH

Ident.: NO-120-00005543.0002001 / 17 JUN 08
Applicable to: ALL

NAVIGATION ACCURACY

The navigation accuracy check is most essential since it determines

- The AP/FD guidance mode to be used
- The ND display mode to be used
- Which raw data which are to be used.

NAVIGATION ACCURACY	Approach guidance	ND		AP/FD mode
		PF	PNF	
GPS PRIMARY	Managed ⁽³⁾	ARC or ROSE NAV ⁽¹⁾ with navaid raw data		NAV-FPA or APP- NAV/FINAL ⁽³⁾
NAV ACCUR HIGH				
NAV ACCUR LOW and NAV ACCURACY check ≤ 1 nm				
GPS PRIMARY LOST and NAV ACCUR LOW and NAV ACCURACY check > 1 nm	Selected	ROSE VOR ⁽²⁾	ARC or ROSE NAV or ROSE VOR ⁽²⁾ with navaid raw data	TRK-FPA
GPS PRIMARY LOST and aircraft flying within unreliable radio navaid area				

- (1) For VOR approach, one pilot may select ROSE VOR
(2) For LOC approach, select ROSE ILS
(3) The managed vertical guidance can be used provided the approach coding in the navigation database has been validated.

Should a NAV ACCY DNGRADED or a GPS PRIMARY LOST message is displayed before a managed non-precision approach, the crew should proceed as follow:

Message	VOR, ADF, VOR/DME approach	GPS approach
GPS PRIMARY LOST	Cross-check the navigation accuracy: If positive, continue managed approach ⁽¹⁾ If negative, revert to selected approach with raw data.	Interrupt the approach
NAV ACCY DNGRADED		-

- (1) If HIGH accuracy is lost on one FMGC, the approach can be continued with the AP/FD associated to the other FMGC.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

NON PRECISION APPROACH

FLYING REFERENCE

The "bird" is to be used as the flying reference

APPROACH PHASE ACTIVATION

The stabilized approach technique is recommended. The crew will set VAPP as a speed constraint at FAF in order to get a meaningful deceleration pseudo waypoint.

INTERMEDIATE APPROACH

Ident.: NO-120-00005545.0001001 / 26 MAR 08

Applicable to: MSN 0781-0852

crew will:

- For managed approach
 - Select HDG according to ATC
 - Select APPR p/b on FCU
 - Check on FMA the final approach mode engagement

If the green solid line intercepts the F-PLN active leg (1), this creates an INTERCPT point with final approach axis. APP NAV will engage when intercepting the final approach course.


If the green solid line intercepts the PRE NAV engagement path (2), APP NAV engages when intercepting the final approach course. The PRE NAV engagement path is at least 1 nm and may be longer depending on aircraft speed.

HDG or TRK may be used to smooth the final approach course interception. When close to the final approach course, DIR TO function may be used.

If the green solid line does not intercept the PRE NAV engagement path (3), APP NAV will not engage.

XTK is related to the beam and the ND gives a comprehensive display.

Additionally, the VDEV becomes active and represents the vertical deviation, which may include a level segment. The VDEV/brick scale will only be displayed if ILS or LS pb is not pressed. If the ILS or LS pb is pressed by mistake, the V/DEV will flash in amber on the PFD.

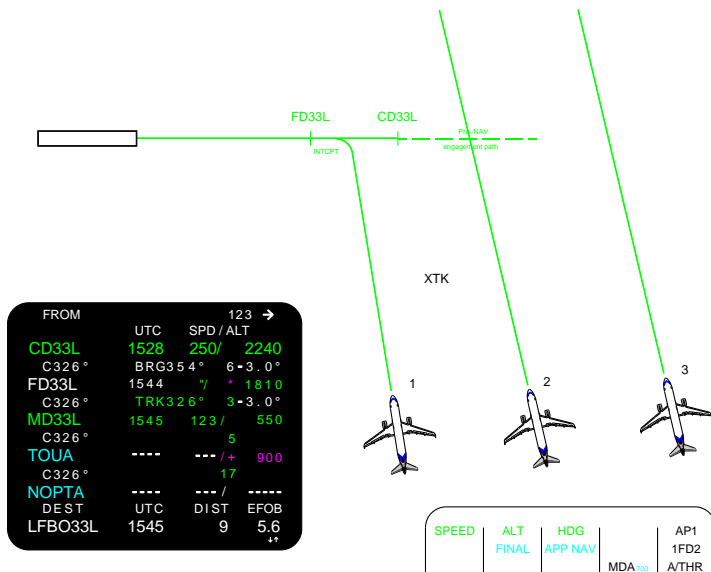

- For selected approach

- Select appropriate TRK on FCU in order to establish final course tracking with reference to raw data. When established on the final course, the selected track will compensate for drift.

The final approach course interception will be monitored through applicable raw data.

INTERMEDIATE APPROACH


Ident.: NO-120-00005545.0002001 / 26 MAR 08

Applicable to: MSN 1320-2180

INTERCEPTION OF FINAL APPROACH COURSE


It is essential to have a correct F-PLN in order to ensure proper final approach guidance. Indeed the NAV and APPR NAV modes are always guiding the aircraft along the F-PLN active leg and the managed vertical mode ensures $VDEV = 0$, $VDEV$, being computed along the remaining F-PLN to destination. Hence, the crew will monitor the proper sequencing of the F-PLN, more specifically if HDG mode is selected, by checking that the TO WPT, on upper right hand corner of ND, is the most probable one and meaningful.

F-PLN sequence in approach

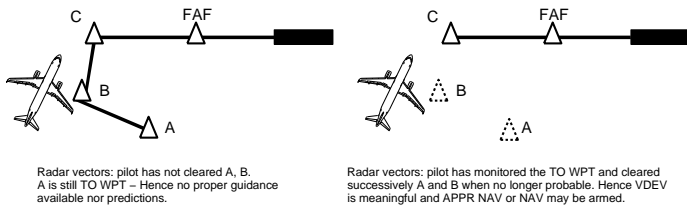

If ATC gives radar vectors for final approach course interception, the crew will use DIR TO FAF with RADIAL INBND facility. This creates an ILS alike beam which will be intercepted by NAV and APPR NAV modes. Additionally, the VDEV is realistic, XTK is related to the beam and the ND gives a comprehensive display.

F-PLN in approach

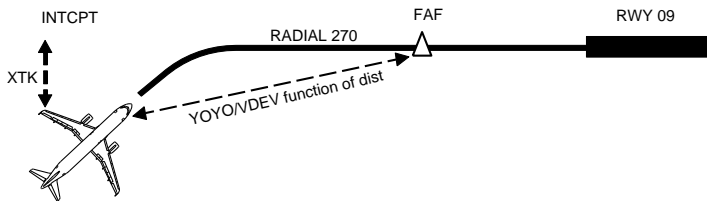

When cleared for final approach course interception, the pilot will either

- For managed approach

Press APPR p/b on FCU. On the FMA, APP NAV becomes active and FINAL becomes armed. The VDEV or "brick" scale becomes active and represents the vertical deviation, which may include a level segment. The VDEV/brick scale will only be displayed if ILS or LS pb is not pressed. If the ILS or LS pb is pressed by mistake, the V/DEV will flash in amber on the PFD

- For selected approach

Select adequate TRK on FCU in order to establish final course tracking with reference to raw data. When established on the final course, the selected track will compensate for drift.

The final approach course interception will be monitored through applicable raw data.

FINAL APPROACH

Ident.: NO-120-00005546.0002001 / 26 MAR 08

Applicable to: ALL

It is essential that the crew does not modify the final approach in the MCDU FPLN page.

The final approach will be flown either

- Managed or
- Selected


MANAGED

For a managed approach, FINAL APP becomes active and the FM manages both lateral and vertical guidance. The crew will monitor the final approach using

- Start of descent blue symbol on ND
- FMA on PFD
- VDEV, XTK, F-PLN on ND with GPS PRIMARY
- VDEV, XTK, F-PLN confirmed by needles, distance/altitude

If FINAL APPR does not engage at start of descent, the crew will select FPA convergent to the final path so as to fly with VDEV=0. Once VDEV=0, the crew may try to re-engage APPR.

In some NPAs, the final approach flies an "idle descent" segment from one altitude constraint to another, followed by a level segment. This is materialized by a magenta level off symbol on ND followed by a blue start of descent.

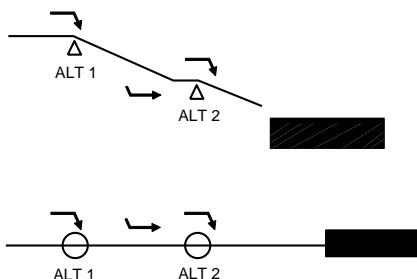Final approach trajectory with idle descent segment

SELECTED

For a selected approach, the Final Path Angle (FPA) should be preset on the FCU 1 nm prior to the FAF at the latest. A smooth interception of the final approach path

NORMAL OPERATIONS
NON PRECISION APPROACH

can be achieved by pulling the FPA selector 0.2 nm prior to the FAF. If GPS is PRIMARY, the crew will monitor VDEV, XTK and F-PLN. Additionally, for VOR or ADF approaches, the crew will monitor raw data.

REACHING THE MINIMA

Ident.: NO-120-00005548.0001001 / 26 MAR 08
Applicable to: ALL

When approaching MDA, the pilot flying should expand the instrument scan to include outside visual cues.

Reaching MDA, "MINIMUM" is either monitored or called by the crew. The current altitude value becomes amber.

If the required conditions are not met by MDA, a missed approach must be initiated. When the required visual conditions are met to continue the approach, the AP must be disconnected, the FDs selected off, Bird ON and continue for visual approach.

LOC ONLY APPROACH

Ident.: NO-120-00005550.0001001 / 26 MAR 08
Applicable to: ALL

LOC ONLY approaches may be flown using the LOC signal for lateral navigation and FPA for vertical guidance. General recommendations mentioned above still apply i.e. stabilized approach technique, use of the bird. Some additional recommendations need to be highlighted.

INITIAL APPROACH

The crew will select LS p/b on the EIS control panel.

INTERMEDIATE APPROACH

The crew will press LOC p/b on the FCU when cleared to intercept. He will monitor the LOC armed mode and then LOC capture.

FINAL APPROACH

Approaching FAF, the crew will select FPA. When established on the final path, the crew will monitor:

- Lateral displacement with LOC deviation
- Vertical displacement with DME and ALT, "yoyo", chrono

LOC BACK COURSE APPROACH

Ident.: NO-120-00005552.0001001 / 26 MAR 08

Applicable to: ALL

LOC-BC approaches may be flown using the Bird with reference to the LOC-BC signal for lateral guidance and FPA for vertical guidance. General recommendations mentioned above still apply i.e. stabilized approach technique and use of the bird. Some additional recommendations need to be highlighted.

GENERAL

The LOC BC approach consists in using the LOC signal of the opposite runway for lateral approach management.

The ILS will be manually entered in the MCDU RAD NAV page using:

- Either the ident (ILS stored in the FMS database). RWY/ILS MISMATCH message may be triggered and will be disregarded.
- Or the frequency (ILS not stored in the FMS database).

In both cases, the front course will be entered in the CRS field.

INITIAL APPROACH

The crew will select ROSE ILS and TRK/FPA. The crew will not select ILS or L/S p/b on the EIS control panel and ISIS r, as it would provide reverse deviation.

INTERMEDIATE APPROACH

When clear for approach, the crew will intercept manually LOC/BC using the blue TRK index with reference with LOC/BC lateral deviation on ND. The crew will not arm LOC or APPR modes.

FINAL APPROACH

Approaching the FAF, the crew will select the FPA corresponding to the final approach path, LOC deviation (proper directional guidance), DME/ALT, time, yoyo.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS
NON PRECISION APPROACH

Intentionally left blank

PREFACE

Ident.: NO-130-00005554.0001001 / 26 MAY 08

Applicable to: ALL

The circling approach is flown when the tower wind is such that the landing runway is different from the runway fitted with an instrument approach, which is used for the descent and approach in order to get visual with the airfield.

APPROACH PREPARATION

Ident.: NO-130-00005556.0001001 / 26 MAY 08

Applicable to: ALL

The approach preparation follows the same schema as described in APPROACH PREPARATION section in the CRUISE chapter. However, some characteristics need to be highlighted:

FPLN

Lateral: STAR, instrument approach procedure.

Vertical: Insert F speed as constraint at FAF since the approach will be flown CONF 3, landing gear down and F speed (stabilized approach). Check altitude constraints.

RAD NAV

Manually tune the VOR/DME of destination airfield as required.

PROG

Insert VOR/DME of destination airfield in the BRG/DIST field as required. Check NAV ACCY if required by comparing BRG/DIST data to raw data.

PERF

PERF APPR: Descent winds, destination airfield weather, minima and landing flap selection (wind shear anticipated or in case of failure).

PERF GO AROUND: Check thrust reduction and acceleration altitude.

FUEL PRED

Check estimated landing weight and extra fuel.

SEC F-PLN

When planning for a circling approach, the landing runway will be inserted into the SEC F-PLN. The crew will update the SEC F-PLN as follows:

- SEC F-PLN then COPY ACTIVE

- Lateral revision on destination and insert landing runway
- Keep the F-PLN discontinuity

FINAL INSTRUMENT APPROACH

Ident.: NO-130-00005557.0001001 / 26 MAR 08

Applicable to: ALL

The crew will fly a stabilized approach at F speed, configuration 3 and landing gear down.

CIRCLING APPROACH

Ident.: NO-130-00005558.0001001 / 25 JUN 08


Applicable to: ALL

When reaching circling minima and with appropriate visual reference for circling,

- Level OFF
- Select TRK/FPA
- Select a TRK of 45 ° away from the final approach course (or as required by the published procedure)
- When wings level, start the chrono.
- Once established downwind, activate the SEC F-PLN to take credit of the "GS mini" protection in final approach when managed speed is used. Additionally, the landing runway will be shown on the ND and the 10 nm range should be selected to assist in positioning onto final approach.
- By the end of the downwind leg, disconnect the AP, select both FDs off and keep the A/THR
- When leaving the circling altitude, select the landing configuration
- Once fully configured, complete the Landing Checklist.

Once the SEC F-PLN is activated, the go-around procedure in the MCDU will be that for the landing runway rather than the one associated with the instrument approach just carried out. Therefore, if visual references were lost during the circling approach, the go-around would have to be flown using selected guidance, following the pre-briefed missed approach procedure.

For circling approach with one engine inoperative, *Refer to AO-020 CIRCLING ONE ENGINE INOPERATIVE.*

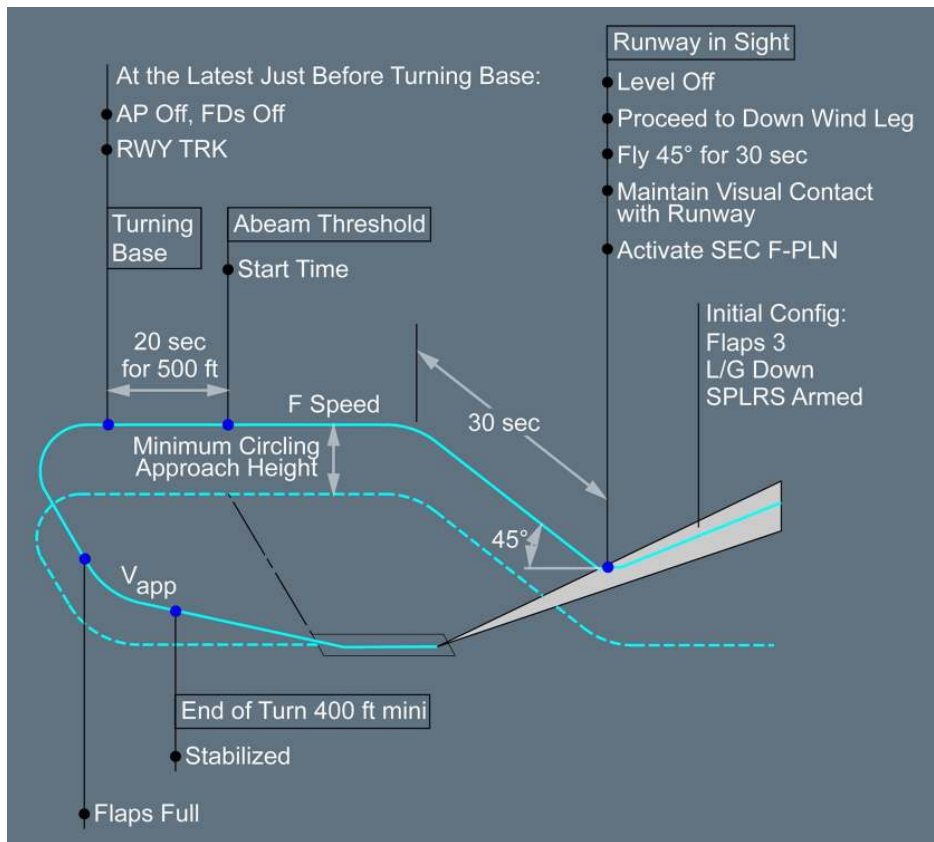Low Visibility Circling Approach




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS
CIRCLING APPROACH

Intentionally left blank

INITIAL APPROACH

Ident.: NO-140-00005560.0001001 / 26 MAY 08

Applicable to: MSN 0781-0852

The crew must keep in mind that the pattern is flown visually. However, the XTK is a good cue of the aircraft lateral position versus the runway centreline. This is obtained when sequencing the F-PLN until the TO WPT (displayed on the ND top right hand corner) is on the final approach course.

The crew will aim to get the following configuration on commencement of the downwind leg:

- Both AP and FDs will be selected off
- BIRD ON
- A/THR confirmed active in speed mode, i.e. SPEED on the FMA.
- Managed speed will be used to enable the "GS mini" function
- The downwind track will be selected on the FCU to assist in downwind tracking.
- The downwind track altitude will be set on FCU

INITIAL APPROACH

Ident.: NO-140-00005560.0002001 / 26 MAY 08

Applicable to: MSN 1320-2180

The crew must keep in mind that the pattern is flown visually. However, the XTK is a good cue of the aircraft lateral position versus the runway centreline. This is obtained when pressing DIR TO CI RADIAL IN.

The crew will aim to get the following configuration on commencement of the downwind leg:

- Both AP and FDs will be selected off
- BIRD ON
- A/THR confirmed active in speed mode, i.e. SPEED on the FMA.
- Managed speed will be used to enable the "GS mini" function
- The downwind track will be selected on the FCU to assist in downwind tracking.
- The downwind track altitude will be set on FCU

INTERMEDIATE/FINAL APPROACH

Ident.: NO-140-00005562.0001001 / 26 MAR 08


Applicable to: ALL

Assuming a 1 500 ft AAL circuit, the base turn should be commenced 45 s after passing abeam the downwind threshold (± 1 s/kt of head/tailwind).

The final turn onto the runway centreline will be commenced with 20° angle of bank. Initially the rate of descent should be 400 ft/min, increasing to 700 ft/min when established on the correct descent path

The pilot will aim to be configured for landing at VAPP by 500 ft AAL, at the latest. If not stabilised, a go-around must be carried out.

visual approach

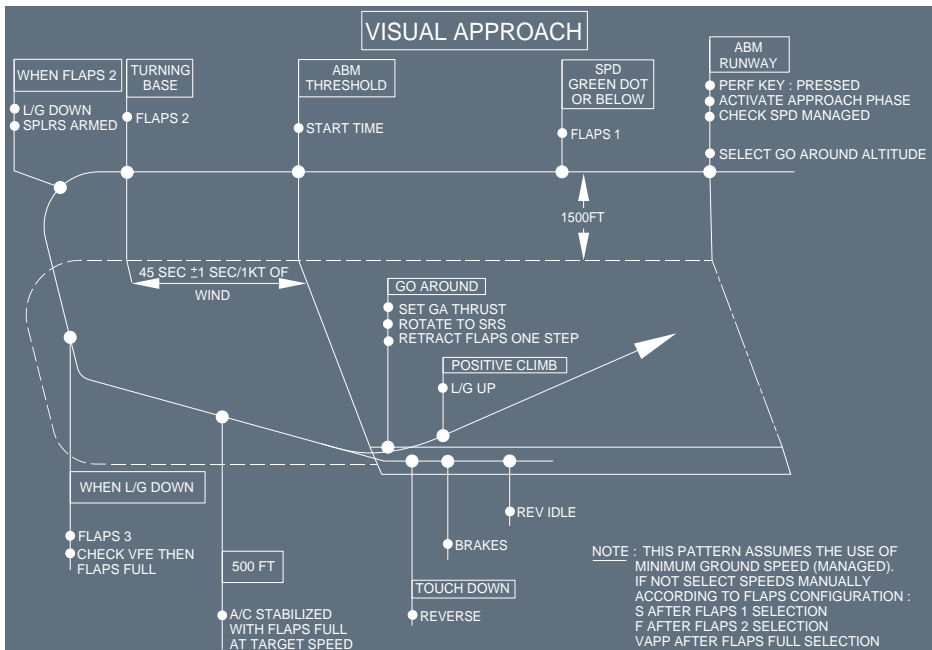





A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

VISUAL APPROACH

Intentionally left blank

GENERAL

Ident.: NO-150-00005563.0001001 / 23 MAY 08

Applicable to: ALL

CAT II and CAT III approaches are flown to very low DH (or without DH) with very low RVR. The guidance of the aircraft on the ILS beam and the guidance of the aircraft speed must be consistently of high performance and accurate so that an automatic landing and roll out can be performed in good conditions and, the acquisition of visual cues is achieved and the aircraft properly stabilized. Hence,

- The automatic landing is required in CAT III operations including roll out in CAT IIIB.
- The automatic landing is the preferred landing technique in CAT II conditions
- Any failures of the automated systems shall not significantly affect the aircraft automatic landing system performance
- The crew procedures and task sharing allow to rapidly detect any anomaly and thus lead to the right decision

DEFINITION

Ident.: NO-150-00005564.0001001 / 25 JUN 08

Applicable to: ALL

DECISION HEIGHT

The Decision Height (DH) is the wheel height above the runway elevation by which a go around must be initiated unless appropriate visual reference has been established and the aircraft position and the approach path have been assessed as satisfactory to continue the automatic approach and landing safely. The DH is based on RA.

ALERT HEIGHT

The Alert Height (AH) is the height above the runway, based on the characteristics of the aeroplane and its fail-operational automatic landing system, above which a CATIII approach would be discontinued and a missed approach initiated if a failure occurred in one of the redundant parts of the automatic landing system, or in the relevant ground equipment.

In others AH definition, it is generally stated that if a failure affecting the fail-operational criteria occurs below the AH, it would be ignored and the approach continued (except if AUTOLAND warning is triggered). The AH concept is relevant when CAT 3 DUAL is displayed on FMA.

On single aisle Airbus family, the AH =100 ft.

CAT 3 SINGLE

CAT 3 SINGLE is announced when the airborne systems are fail passive which means that a single failure will lead to the AP disconnection without any significant out of trim condition or deviation of the flight path or attitude. Manual flight is then required. This minimum DH is 50 ft.

CAT 3 DUAL

CAT 3 DUAL is announced when the airborne systems are fail-operational. In case of a single failure, the AP will continue to guide the aircraft on the flight path and the automatic landing system will operate as a fail-passive system. In the event of a failure below the AH, the approach, flare and landing can be completed by the remaining part of the automatic system. In that case, no capability degradation is indicated. Such a redundancy allows CAT III operations with or without DH.

CAT II OR CAT III APPROACHES

		ICAO	FAA	JAA
CAT II	DH	100 ft ≤ DH < 200 ft	100 ft ≤ DH < 200 ft	100 ft ≤ DH < 200 ft
	RVR	RVR ≥ 350 m RVR ≥ 1 200 ft	350 m ≤ RVR < 800 m 1 200 ft ≤ RVR < 2 400 ft	RVR ≥ 300 m RVR ≥ 1 000 ft
CAT IIIA	DH	No DH or DH < 100 ft	No DH or DH < 100 ft	DH < 100 ft ⁽¹⁾
	RVR	RVR ≥ 200 m RVR ≥ 700 ft	RVR ≥ 200 m RVR ≥ 700 ft	RVR ≥ 200 m RVR ≥ 700 ft
CAT IIIB	DH	No DH or DH < 50 ft	No DH or DH < 50 ft	No DH or DH < 50 ft
	RVR	50 m ≤ RVR < 200 m 150 ft ≤ RVR < 700 ft	50 m ≤ RVR < 200 m 150 ft ≤ RVR < 700 ft	75 m ≤ RVR < 200 m 250 ft ≤ RVR < 700 ft

(1) DH ≥ 50 ft if fail passive


FLIGHT PREPARATION

Ident.: NO-150-00005566.0001001 / 26 MAR 08

Applicable to: ALL

In addition to the normal flight preparation, the following preparation must be performed when CAT II or CAT III approach is planned:

- Ensure that destination airport meets CAT II or CAT III requirements
- Check aircraft required equipment for CAT II or CAT III in QRH
- Check that crew qualification is current
- Consider extra fuel for possible approach delay

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRECISION APPROACH
---	---

- Consider weather at alternate

APPROACH PREPARATION
Ident.: NO-150-00005567.0001001 / 23 MAY 08 Applicable to: ALL

LIMITATIONS

- The crew will check that tower wind remains within the limit for CAT II or CAT III approaches (*Refer to FCOM/LIM-22-20 MAXIMUM WIND CONDITIONS FOR CAT II OR CAT III AUTOMATIC APPROACH LANDING AND ROLL OUT*)
- The autoland maximum altitude must be observed.

AIRCRAFT CAPABILITY

The failures that may affect the aircraft's CAT II or CAT III capability are listed in the QRH. Most of these failures are monitored by the FMGS and the landing capability will be displayed on the FMA once the APPR pb is pressed, i.e. CAT II, CAT III SINGLE, CAT III DUAL. However, there are a number of failures which affect the aircraft's landing capability which are not monitored by the FMGS and, consequently, not reflected on the FMA. It is very important, therefore, that the crew refer to the QRH to establish the actual landing capability if some equipment are listed inoperative.

AIRPORT FACILITIES

The airport authorities are responsible for establishing and maintaining the equipment required for CAT II/III approach and landing. The airport authorities will activate the LVP procedures as the need arises based on RVR. Prior to planning a CAT II/III approach, the crew must ensure that LVP are in force.

CREW QUALIFICATION

The captain must ensure that both crew members are qualified and that their qualification is current for the planned approach.

SEATING POSITION

The crew must realise the importance of eye position during low visibility approaches and landing. A too low seat position may greatly reduce the visual segment. When the eye reference position is lower than intended, the visual segment is further reduced by the cut-off angle of the glareshield or nose. As a rule of thumb, an incorrect seating position which reduces the cut-off angle by 1 ° reduces the visual segment by approximately 10 m (30 ft).

USE OF LANDING LIGHTS

The use of landing lights at night in low visibility can be detrimental to the acquisition of visual reference. Reflected lights from water droplets or snow may actually reduce visibility. The landing lights would, therefore, not normally be used in CAT II/III weather conditions.

APPROACH STRATEGY

Irrespective of the actual weather conditions, the crew should plan the approach using the best approach capability. This would normally be CAT III DUAL with autoland, depending upon aircraft status. The crew should then assess the weather with respect to possible downgrade capability.

Conditions	CAT I	CAT II	CAT III	
			WITH DH	NO DH
Flying technique	Manual flying or AP/FD, A/THR	AP/FD, A/THR down to DH	AP/FD/ATHR and Autoland	
Minima & weather	DA (DH) Baro ref Visibility	DH with RA RVR		
Autoland	Possible with precautions	Recommended	Mandatory	


GO AROUND STRATEGY

The crew must be ready mentally for go-around at any stage of the approach. Should a failure occur above 1 000 ft RA, all ECAM actions (and DH amendment if required) should be completed before reaching 1 000 ft RA, otherwise a go-around should be initiated. This ensures proper task sharing for the remainder of the approach. Any alert generated below 1 000 ft should lead to a go-around.

APPROACH BRIEFING

Before commencing a CAT II/III approach a number of factors must be considered by the crew. In addition to the standard approach briefing, the following points should be emphasised during an approach briefing for a low visibility approach:

- Aircraft capability
- Airport facilities
- Crew qualification
- Weather minima
- Task sharing
- Call-outs

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS PRECISION APPROACH
---	---

- Go-around strategy

APPROACH PROCEDURE
Ident.: NO-150-00005568.0001001 / 25 JUN 08 Applicable to: ALL

TASK SHARING

The workload is distributed in such a way that the PF primary tasks are supervising and decision making and the PNF primary task is monitoring the operation of the automatic system.

The PF supervises the approach (trajectory, attitude, speed) and takes appropriate decision in case of failure and at DH. Since the approach is flown with AP/FD/A-THR, the PF must be continuously ready to take-over

- If any AP hard over is experienced
- If a major failure occurs
- If any doubt arises

The PF announces "LAND", when displayed on FMA.

The PNF is head down throughout the approach and landing. The PNF monitors:

- The FMA and calls mode change as required (except "LAND")
- The Auto call out
- The aircraft trajectory or attitude exceedance
- Any failures

The PNF should be go-around minded.

SOME SYSTEM PARTICULARS

- Below 700 ft RA, data coming from the FMS is frozen e.g. ILS tune inhibit.
- Below 400 ft RA, the FCU is frozen.
- At 350 ft, LAND must be displayed on FMA. This ensures correct final approach guidance.
- Below 200 ft, the AUTOLAND red light illuminates if
 - Both APs trip off
 - Excessive beam deviation is sensed
 - Localizer or glide slope transmitter or receiver fails
 - A RA discrepancy of at least 15 ft is sensed.
- Flare comes at or below 40 ft
- THR IDLE comes at or below 30 ft

- RETARD auto call out comes at 10 ft for autoland as an order. (Instead of 20 ft for manual landing as an indication)

VISUAL REFERENCE

Approaching the DH, the PF starts to look for visual references, progressively increasing external scanning. It should be stressed that the DH is the lower limit of the decision zone. The captain should come to this zone prepared for a go-around but with no pre-established judgement.

Required conditions to continue

- With DH

In CAT II operations, the conditions required at DH to continue the approach are that the visual references should be appropriate to monitor the continued approach and landing and that the flight path should be acceptable. If both these conditions are not satisfied, it is mandatory to initiate a go-around. A 3 lights segment and a lateral light element is the minimum visual cue for JAR OPS.

In CAT III operations, the condition required at DH is that there should be visual references which confirm that the aircraft is over the touch down zone. Go-around is mandatory if the visual references do not confirm this. A 3 lights segment is required by JAR OPS for fail passive system and 1 centerline light segment for fail operational system.

- Without DH

The decision to continue does not depend on visual references, even though a minimum RVR is specified. The decision depends only on the operational status of the aircraft and ground equipment. If a failure occurs prior to reaching the AH, a go-around will be initiated. A go-around must nevertheless be performed if AUTOLAND warning is triggered below AH. However, it is good airmanship for the PF to acquire visual cues during flare and to monitor the roll out.

Loss of visual reference

- With DH before touch down

If decision to continue has been made by DH and the visual references subsequently become inappropriate a go-around must be initiated.

A late go-around may result in ground contact. If touch down occurs after TOGA is engaged, the AP remains engaged in that mode and A/THR remains in TOGA. The ground spoilers and auto-brake are inhibited.

- With DH or without DH after touch down

If visual references are lost after touch down, a go-around should not be attempted. The roll-out should be continued with AP in ROLL OUT mode down to taxi speed.

FLARE/LANDING/ROLL OUT

During the flare, decrab and roll-out, the PF will look outside to assess that the autoland is properly carried out, considering the appropriate visual references. For CAT II approaches, autoland is recommended. If manual landing is preferred, the PF will take-over at 80 ft at the latest. This ensures a smooth transition for the manual landing.

Select maximum reverse at main landing gear touch down.

The use of auto-brake is recommended as it ensures a symmetrical brake pressure application. However, the crew should be aware of possible dissymmetry in case of crosswind and wet runways.

The PNF will use standard call out. Additionally, he will advise ATC when aircraft is properly controlled (speed and lateral trajectory).

FAILURE AND ASSOCIATED ACTIONS

Ident.: NO-150-00005570.0001001 / 26 MAR 08

Applicable to: ALL

As a general rule, if a failure occurs above 1 000 ft AGL, the approach may be continued, ECAM actions completed, approach briefing update performed and a higher DH set if required.

Below 1 000 ft (and down to AH in CAT3 DUAL), the occurrence of any failure implies a go-around and a reassessment of the system capability. Another approach may be under taken according to the new system capability. It has been considered that below 1 000 ft, not enough time is available for the crew to perform the necessary switching, to check system configuration and limitation and brief for minima.

In CAT3 DUAL and below AH, as a general rule, a single failure does not necessitate a go-around. A go-around is required if the AUTOLAND warning is triggered.

AUTOLAND IN CAT 1 OR BETTER WEATHER CONDITIONS

Ident.: NO-150-00005571.0001001 / 26 MAR 08

Applicable to: ALL

The crew may wish to practice automatic landings in CAT I or better weather conditions for training purposes. This type of approach should be carried out only with the airline authorization. The crew should be aware that fluctuations of the LOC and/or GS might occur due to the fact that protection of ILS sensitive areas, which applies during LVP, will not necessarily be in force. It is essential, therefore, that the PF is prepared to take over manually at any time during a practice approach and rollout, should the performance of the AP become unsatisfactory.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS
PRECISION APPROACH

Intentionally left blank

PREFACE

Ident.: NO-160-00005573.0001001 / 26 MAR 08

Applicable to: ALL

When Transitioning from IMC to VMC, the crew will watch the bird versus the aircraft attitude symbol in the center of the PFD. This provides a good assessment of the drift, thus in which direction to look for the runway.

But, then


- Do not turn towards the runway
- Do not duck under

MAIN GEAR CLEARANCE


Ident.: NO-160-00005575.0001001 / 26 MAR 08

Applicable to: ALL

The boxed images below are the one to retain to ensure about 20 ft wheel clearance at threshold.

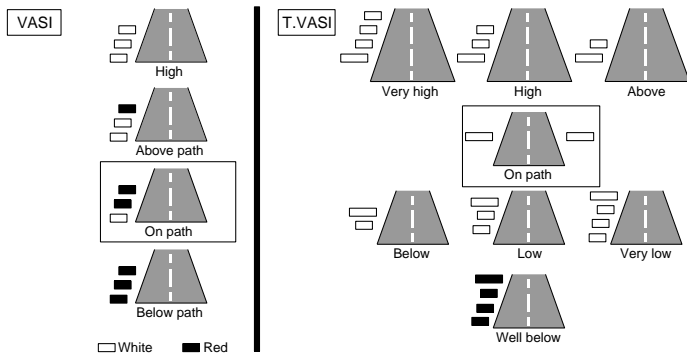use of VASI/TVASI/PAPI


use of VASI/TVASI/PAPI

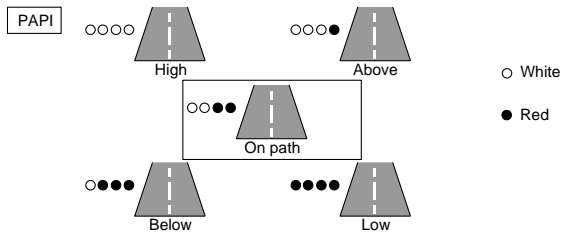

This technique will ensure that performance margins are not compromised and provide adequate main gear clearance.

FLARE

Ident.: NO-160-00005576.0001001 / 26 MAR 08

Applicable to: ALL

PITCH CONTROL

When reaching 50 ft, auto-trim ceases and the pitch law is modified to flare law. Indeed, the normal pitch law, which provides trajectory stability, is not the best adapted to the flare manoeuvre. The system memorizes the attitude at 50 ft, and that attitude becomes the initial reference for pitch attitude control. As the aircraft descends through 30 ft, the system begins to reduce the pitch attitude at a predetermined rate of 2 ° down in 8 s. Consequently, as the speed reduces, the pilot will have to move the stick rearwards to maintain a constant path. The flare technique is thus very conventional.

From stabilized conditions, the flare height is about 30 ft. This height varies with different parameters, such as weight, rate of descent, wind variations...

Avoid under flaring.

- The rate of descent must be controlled prior to the initiation of the flare (rate not increasing)
- Start the flare with positive backpressure on the sidestick and holding as necessary
- Avoid forward stick movement once Flare initiated (releasing back-pressure is acceptable)

At 20 ft, the "RETARD" auto call-out reminds the pilot to retard thrust levers. It is a reminder rather than an order. The pilot will retard the thrust levers when best adapted e.g. if high and fast on the final path the pilot will retard earlier. In order to assess the rate of descent in the flare, and the aircraft position relative to the ground,

look well ahead of the aircraft. The typical pitch increment in the flare is approximately 4 °, which leads to -1 ° flight path angle associated with a 10 kt speed decay in the manoeuvre. A prolonged float will increase both the landing distance and the risk of tail strike.

LATERAL AND DIRECTIONAL CONTROL

FINAL APPROACH

In crosswind conditions, a crabbed-approach should be flown.

FLARE

The objectives of the lateral and directional control of the aircraft during the flare are:

- To land on the centerline
- And, to minimize the loads on the main landing gear.

During the flare, rudder should be applied as required to align the aircraft with the runway heading. Any tendency to drift downwind should be counteracted by an appropriate lateral (roll) input on the sidestick.

In the case of a very strong cross wind, the aircraft may be landed with a residual drift (up to about 5 °) to prevent an excessive bank (up to about 5 °).

Consequently, combination of the partial de-crab and wing down techniques may be required.

MAXIMUM DEMONSTRATED CROSSWIND FOR LANDING

Ident.: NO-160-00005578.0001001 / 16 JUN 08

Applicable to: ALL

With a good reported braking action, the maximum demonstrated crosswind at landing is 33 knots, with gusts up to 38 knots.

CALL OUT

Ident.: NO-160-00005579.0001001 / 26 MAR 08

Applicable to: MSN 1320-1637, 1777-2180

If pitch attitude exceeds 10 °, the PNF will announce "PITCH".



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

LANDING

CALL OUT

Ident.: NO-160-00005579.0002001 / 26 MAR 08

Applicable to: MSN 0781-0852, 1720

If pitch attitude exceeds 7.5° , the PNF will announce "PITCH".

DEROTATION

Ident.: NO-160-00005581.0001001 / 26 MAR 08

Applicable to: ALL

When the aircraft is on the ground, pitch and roll control operates in Direct Law. Consequently, when the aircraft touches down, the pilot flies the nose down conventionally, varying sidestick input as required, to control the derotation rate. After touch down, when reverse thrust is selected (on at least one engine) and one main landing gear strut is compressed, the ground spoilers partially extend to establish ground contact. The ground spoilers fully extend when both main landing gears are compressed. A small nose down term on the elevators is introduced by the control law, which compensates the pitch up tendency with ground spoiler extension. It is not recommended to keep the nose high in order to increase aircraft drag during the initial part of the roll-out, as this technique is inefficient and increases the risk of tail strike. Furthermore, if auto brake MED is used, it may lead to a hard nose gear touch down.

ROLL OUT

Ident.: NO-160-00005583.0001001 / 26 MAR 08

Applicable to: ALL

NORMAL CONDITIONS

During the roll out, the rudder pedals will be used to steer the aircraft on the runway centreline. At high speed, directional control is achieved with rudder. As the speed reduces, the Nose Wheel Steering (NWS) becomes active. However, the NWS tiller will not be used until taxi speed is reached.

CROSSWIND CONDITIONS

The above-mentioned technique applies. Additionally, the pilot will avoid setting stick into the wind as it increases the weathercock effect. Indeed, it creates a differential down force on the wheels into the wind side and differential drag due to spoiler retraction.

The reversers have a destabilizing effect on the airflow around the rudder and thus

decrease the efficiency of the rudder. Furthermore they create a side force, in case of a remaining crab angle, which increases the lateral skidding tendency of the aircraft. This adverse effect is quite noticeable on contaminated runways with crosswind. In case a lateral control problem occurs in high crosswind landing, the pilot will consider to set reversers back to Idle.

At lower speeds, the directional control of the aircraft is more problematic, more specifically on wet and contaminated runways. Differential braking is to be used if necessary. On wet and contaminated runways, the same braking effect may be reached with full or half deflection of the pedals; additionally the anti skid system releases the brake pressure on both sides very early when the pilot presses on the pedals. Thus if differential braking is to be used, the crew will totally release the pedal on the opposite side to the expected turn direction.

BRAKING

Ident.: NO-160-00005584.0001001 / 30 JUN 08

Applicable to: ALL

Once on the ground, the importance of the timely use of all means of stopping the aircraft cannot be overemphasised. Three systems are involved in braking once the aircraft is on the ground:

- The ground spoilers
- The thrust reversers
- The wheel brakes

THE GROUND SPOILERS

When the aircraft touches down with at least one main landing gear and when at least one thrust lever is in the reverse sector, the ground spoilers partially automatically deploy to ensure that the aircraft is properly sit down on ground. Then, the ground spoilers automatically fully deploy. This is the partial lift dumping function.

The ground spoilers contribute to aircraft deceleration by increasing aerodynamic drag at high speed. Wheel braking efficiency is improved due to the increased load on the wheels. Additionally, the ground spoiler extension signal is used for auto-brake activation.

THRUST REVERSERS

Thrust reverser efficiency is proportional to the square of the speed. So, it is recommended to use reverse thrust at high speeds.

Select maximum reverse at main landing gear touch down.

The maximum reverse thrust is obtained at N1 between 70 % and 85 % and is controlled by the FADEC.

A slight pitch-up, easily controlled by the crew, may appear when the thrust reversers are deployed before the nose landing gear touches down.

Below 70 kt, reversers efficiency decreases rapidly. Additionally, the use of high levels of reverse thrust at low speed can cause engine stalls.

Therefore, it is recommended to smoothly reduce the reverse thrust to idle at 70 kt. However, the use of maximum reverse is allowed down to aircraft stop in case of emergency.

If airport regulations restrict the use of reverse, select and maintain reverse idle until taxi speed is reached.

Stow the reversers before leaving the runway to avoid foreign object ingestion.

WHEEL BRAKES

Wheel brakes contribute the most to aircraft deceleration on the ground. Many factors may affect efficient braking such as load on the wheels, tire pressure, runway pavement characteristics and runway contamination and braking technique. The only factor over which the pilot has any control is the use of the correct braking technique, as discussed below.

ANTI-SKID

The anti-skid system adapts pilot applied brake pressure to runway conditions by sensing an impending skid condition and adjusting the brake pressure to each individual wheel as required. The anti-skid system maintains the skidding factor (slip ratio) close to the maximum friction force point. This will provide the optimum deceleration with respect to the pilot input. Full pedal braking with anti-skid provides a deceleration rate of 10 kt/sec.

BRAKES

The use of auto brake versus pedal braking should observe the following guidelines:

- The use of A/BRAKE is usually preferable because it minimizes the number of brake applications and thus reduces brake wear. Additionally, the A/BRAKE provides a symmetrical brake pressure application which ensures an equal braking effect on both main landing gear wheels on wet or evenly contaminated runway. More particularly, the A/BRAKE is recommended on short, wet, contaminated runway, in poor visibility conditions and in Auto land.
- The use of LO auto brake should be preferred on long and dry runways whereas the use of MED auto brake should be preferred for short or contaminated runways. The use of MAX auto brake is not recommended.
- On very short runways, the use of pedal braking is to be envisaged since the pilot may apply full pedal braking with no delay after touch down.

- On very long runways, the use of pedal braking may be envisaged if the pilot anticipates that braking will not be needed. To reduce brake wear, the number of brake application should be limited.
- In case of pedal braking, do not ride the brakes but apply pedal braking when required and modulate the pressure without releasing. This minimizes brake wear.

The green DECEL light comes on when the actual deceleration is 80 % of the selected rate. For example the DECEL light might not appear when the autobrake is selected on a contaminated runway, because the deceleration rate is not reached with the autobrake properly functioning. Whereas the DECEL light might appear with LO selected on a dry runway while only the reversers achieve the selected deceleration rate without autobrake being actually activated. In other words, the DECEL light is not an indicator of the autobrake operation as such, but that the deceleration rate is reached.


Since the auto brake system senses deceleration and modulates brake pressure accordingly, the timely application of MAX reverse thrust will reduce the actual operation of the brakes themselves, thus the brake wear and temperature.

Auto-brake does not relieve the pilot of the responsibility of achieving a safe stop within the available runway length.

CROSS WIND CONDITIONS

The reverse thrust side force and crosswind component can combine to cause the aircraft to drift to the downwind side of the runway if the aircraft is allowed to weathercock into wind after landing. Additionally, as the anti-skid system will be operating at maximum braking effectiveness, the main gear tire cornering forces available to counteract this drift will be reduced.


braking force and cornering force vs antiskid

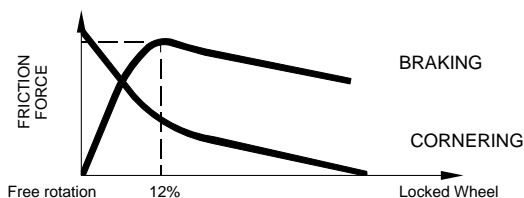

To correct back to the centreline, the pilot must reduce reverse thrust to reverse idle and release the brakes. This will minimise the reverse thrust side force component, without the requirement to go through a full reverser actuating cycle, and provide the total tire cornering forces for realignment with the runway centreline. Rudder and differential braking should be used, as required, to correct back to the runway

centreline. When re-established on the runway centreline, the pilot should re-apply braking and reverse thrust as required.

Directional Control during Crosswind Landing

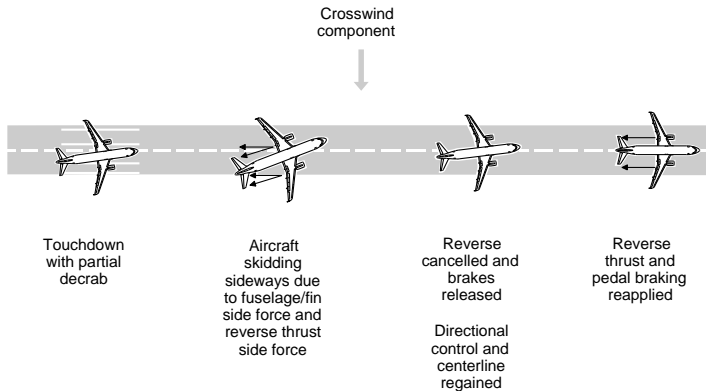

FACTORS AFFECTING LANDING DISTANCE

Ident.: NO-160-00005586.0001001 / 16 MAY 08

Applicable to: ALL

The field length requirements are contained in the FCOM PER, LND LANDING. The landing distance margin will be reduced if the landing technique is not correct. Factors that affect stopping distance include:

- Height and speed over the threshold
- Glide slope angle
- Landing flare technique
- Delay in lowering the nose on to the runway
- Improper use of braking system
- Runway conditions (discussed in adverse weather).

Height of the aircraft over the runway threshold has a significant effect on total landing distance. For example, on a 3 ° glide path, passing over the runway threshold at 100 ft altitude rather than 50 ft could increase the total landing distance by approximately 300 m/950 ft. This is due to the length of runway used before the aircraft touches down.


A 5 kt speed increment on VAPP produces a 5 % increase in landing distance with auto brake selected.

For a 50 ft Threshold Crossing Height, a shallower glide path angle increases the landing distance, as the projected touchdown point will be further down the runway. Floating above the runway before touchdown must be avoided because it uses a large portion of the available runway. The aircraft should be landed as near the normal touchdown point as possible. Deceleration rate on the runway is approximately three times greater than in the air.


Reverse thrust and speedbrake drag are most effective during the high-speed portion of the landing. Therefore, reverse thrust should be selected without delay.

Speed brakes fully deployed, in conjunction with maximum reverse thrust and maximum manual anti-skid braking provides the minimum stopping distance.

Operational factors affecting actual landing distance

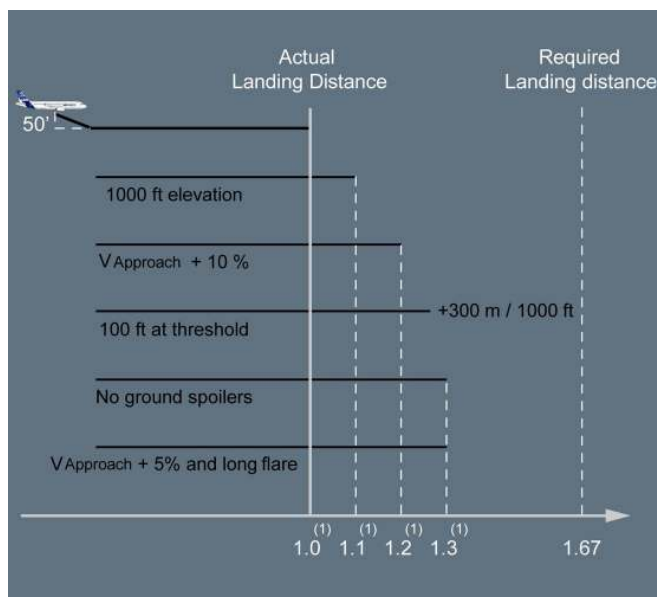

⁽¹⁾ Those coefficients are given as indications.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	<h2 style="text-align: center;">NORMAL OPERATIONS</h2> <h3 style="text-align: center;">LANDING</h3>
--	---

CLEARANCE AT TOUCH DOWN

Ident.: NO-160-00005587.0003001 / 26 MAR 08

Applicable to: MSN 1320-1637, 1777-2180

Geometry limit at touch down	Pitch attitude at VAPP(Vref +5 kt) ⁽¹⁾	Pitch attitude at touch down	Clearance ⁽²⁾
13.5 °	3.3 °	7.6 °	5.9 °

(1) *Flight path in approach: -3 °*

(2) *Clearance = geometry limit - pitch attitude at touch down*

CLEARANCE AT TOUCH DOWN

Ident.: NO-160-00005587.0006001 / 26 MAR 08

Applicable to: MSN 0781-0852, 1720

Geometry limit at touch down	Pitch attitude at VAPP(Vref +5 kt) ⁽¹⁾	Pitch attitude at touch down	Clearance ⁽²⁾
10.8 °	2.4 °	6.6 °	4.2 °

(1) *Flight path in approach: -3 °*

(2) *Clearance = geometry limit - pitch attitude at touch down*

TAIL STRIKE AVOIDANCE

Ident.: NO-160-00005589.0001001 / 23 MAY 08

Applicable to: ALL


Although most of tail strikes are due to deviations from normal landing techniques, some are associated with external conditions such as turbulence and wind gradient.

DEVIATION FROM NORMAL TECHNIQUES

Deviations from normal landing techniques are the most common causes of tail strikes. The main reasons for this are due to:

- Allowing the speed to decrease well below VAPP before flare

Flying at too low speed means high angle of attack and high pitch attitude, thus reducing ground clearance. When reaching the flare height, the pilot will have to significantly increase the pitch attitude to reduce the sink rate. This may cause the pitch to go beyond the critical angle.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	NORMAL OPERATIONS LANDING
---	--

- Prolonged hold off for a smooth touch down
As the pitch increases, the pilot needs to focus further ahead to assess the aircraft's position in relation to the ground. The attitude and distance relationship can lead to a pitch attitude increase beyond the critical angle.
- Too high flare
A high flare can result in a combined decrease in airspeed and a long float. Since both lead to an increase in pitch attitude, the result is reduced tail clearance.
- Too high sink rate, just prior reaching the flare height
In case of too high sink rate close to the ground, the pilot may attempt to avoid a firm touch down by commanding a high pitch rate. This action will significantly increase the pitch attitude and, as the resulting lift increase may be insufficient to significantly reduce the sink rate, the high pitch rate may be difficult to control after touch down, particularly in case of bounce.
- Bouncing at touch down
In case of bouncing at touch down, the pilot may be tempted to increase the pitch attitude to ensure a smooth second touch down. If the bounce results from a firm touch down, associated with high pitch rate, it is important to control the pitch so that it does not further increase beyond the critical angle.

APPROACH AND LANDING TECHNIQUES

A stabilized approach is essential for achieving successful landings. It is imperative that the flare height be reached at the appropriate airspeed and flight path angle. The A/THR and FPV are effective aids to the pilot.

VAPP should be determined with the wind corrections (provided in FCOM/QRH) by using the FMGS functions. As a reminder, when the aircraft is close to the ground, the wind intensity tends to decrease and the wind direction to turn (direction in degrees decreasing in the northern latitudes). Both effects may reduce the head wind component close to the ground and the wind correction to VAPP is there to compensate for this effect.

When the aircraft is close to the ground, high sink rate should be avoided, even in an attempt to maintain a close tracking of the glideslope. Priority should be given to the attitude and sink rate. If a normal touchdown distance is not possible, a go-around should be performed.

If the aircraft has reached the flare height at VAPP, with a stabilized flight path angle, the normal SOP landing technique will lead to the right touchdown attitude and airspeed.

During the flare, the pilot should not concentrate on the airspeed, but only on the attitude with external cues.

Specific PNF call outs have been reinforced for excessive pitch attitude at landing.

After touch down, the pilot must "fly" the nosewheel smoothly, but without delay, on to the runway, and must be ready to counteract any residual pitch up effect of the ground spoilers. However, the main part of the spoiler pitch up effect is compensated by the flight control law itself.

BOUNCING AT TOUCH DOWN

In case of light bounce, maintain the pitch attitude and complete the landing, while keeping the thrust at idle. Do not allow the pitch attitude to increase, particularly following a firm touch down with a high pitch rate.

In case of high bounce, maintain the pitch attitude and initiate a go-around. Do not try to avoid a second touch down during the go-around. Should it happen, it would be soft enough to prevent damage to the aircraft, if pitch attitude is maintained.

Only when safely established in the go-around, retract flaps one step and the landing gear. A landing should not be attempted immediately after high bounce, as thrust may be required to soften the second touch down and the remaining runway length may be insufficient to stop the aircraft.

CUMULATIVE EFFECTS

No single factor should result in a tail strike, but accumulation of several can significantly reduce the margin.



PREFACE

Ident.: NO-170-00005592.0001001 / 26 MAR 08

Applicable to: ALL

Failure to recognize the need for and to execute a go-around, when required, is a major cause of approach and landing accidents. Because a go-around is an infrequent occurrence, it is important to be "go-around minded". The decision to go-around should not be delayed, as an early go-around is safer than a last minute one at lower altitude.

CONSIDERATIONS ABOUT GO-AROUND

Ident.: NO-170-00005593.0001001 / 26 MAR 08

Applicable to: ALL

A go-around must be considered if:

- There is a loss or a doubt about situation awareness
- If there is a malfunction which jeopardizes the safe completion of the approach e.g. major navigation problem
- ATC changes the final approach clearance resulting in rushed action from the crew or potentially unstable approach
- The approach is unstable in speed, altitude, and flight path in such a way that stability will not be obtained by 1 000 ft IMC or 500 ft VMC.
- Any GPWS, TCAS or windshears alert occur
- Adequate visual cues are not obtained reaching the minima.

AP/FD GO-AROUND PHASE ACTIVATION

Ident.: NO-170-00005594.0001001 / 26 MAR 08

Applicable to: MSN 0852

The go-around phase is activated when the thrust levers are set to TOGA, provided the flap lever is selected to Flap 1 or greater. The missed approach becomes the active F-PLN and the previously flown approach is strung back into the F-PLN.

For the go-around, the appropriate flying reference is the attitude, since it is dynamic manoeuvre. So, if the "bird" is ON, the PF will ask the PNF to select HDG/VS, in order to remove the "bird". This also permits to replace the FPD by the FD bars, if the flight director is in use.

If the autopilot or the flight director is in use, SRS and GA TRK modes engage.

If the autopilot and both flight directors are off, the PF will maintain 15 ° of pitch.

If TOGA thrust is not required during a go-around for any reason, e.g. an early go-

around ordered by ATC, it is essential that thrust levers are set to TOGA momentarily to sequence the F-PLN. If this is not done, the destination airfield will be sequenced and the primary F-PLN will become PPOS - DISCONT- .

AP/FD GO-AROUND PHASE ACTIVATION

Ident.: NO-170-00005594.0002001 / 26 MAR 08

Applicable to: MSN 0781, 1320-2180

The go-around phase is activated when the thrust levers are set to TOGA, provided the flap lever is selected to Flap 1 or greater. The FDs bars are displayed automatically and SRS and GA TRK modes engage. The missed approach becomes the active F-PLN and the previously flown approach is strung back into the F-PLN.

For the go-around, the appropriate flying reference is the attitude, since it is dynamic manoeuvre. This is why, if the "bird" is ON, it is automatically removed, and the FD bars automatically replace the FPD.

If TOGA thrust is not required during a go-around for any reason, e.g. an early go-around ordered by ATC, it is essential that thrust levers are set to TOGA momentarily to sequence the F-PLN. If this is not done, the destination airfield will be sequenced and the primary F-PLN will become PPOS - DISCONT-

GO-AROUND PHASE

Ident.: NO-170-00005595.0001001 / 02 JUL 08

Applicable to: MSN 0852

GO AROUND WITH FD ON

The SRS mode guides the aircraft with a maximum speed of VAPP or IAS at time of TOGA selection (limited to maximum of VLS +25 with all engines operative or VLS +15 with one engine inoperative with FMS 2) until the acceleration altitude where the target speed increases to green dot.

Some FMS misbehaviour may prevent this automatic target speed increase. Should this occur, pulling the FCU ALT knob for OP CLB manually disengages SRS mode and allows the target speed to increase to green dot. It should be noted however, that the target speed increases to green dot speed as soon as ALT* mode engages when approaching the FCU clearance altitude.

The GA TRK mode guides the aircraft on the track memorised at the time of TOGA selection. The missed approach route becomes the ACTIVE F-PLN provided the waypoints have been correctly sequenced on the approach. Pushing for NAV enables the missed approach F-PLN to be followed.

Above the go-around acceleration altitude, or when the flight crew engages another

vertical mode (CLB, OP CLB), the target speed is green dot.

GO AROUND WITH FD OFF

The PF maintains 15 ° of pitch.

The crew will not select the FD ON before the acceleration altitude, since this would not activate the SRS mode. (V/S mode would be activated, maintaining the V/S at mode engagement).

At the thrust reduction/acceleration altitude, the crew will set the selected speed to green dot before setting CLB thrust, since the autothrust will activate in selected speed mode.

The crew will then set the FD ON , and select the appropriate modes.

GO-AROUND PHASE

Ident.: NO-170-00005595.0002001 / 02 JUL 08

Applicable to: MSN 0781, 1320-2180

The SRS mode guides the aircraft with a maximum speed of VAPP or IAS at time of TOGA selection (limited to maximum of VLS +25 with all engines operative or VLS +15 with one engine inoperative with FMS 2) until the acceleration altitude where the target speed increases to green dot.

Some FMS misbehaviour may prevent this automatic target speed increase. Should this occur, pulling the FCU ALT knob for OP CLB manually disengages SRS mode and allows the target speed to increase to green dot. It should be noted however, that the target speed increases to green dot speed as soon as ALT* mode engages when approaching the FCU clearance altitude.

The GA TRK mode guides the aircraft on the track memorised at the time of TOGA selection. The missed approach route becomes the ACTIVE F-PLN provided the waypoints have been correctly sequenced on the approach. Pushing for NAV enables the missed approach F-PLN to be followed.

Above the go-around acceleration altitude, or when the flight crew engages another vertical mode (CLB, OP CLB), the target speed is green dot.

ENGINES ACCELERATION


Ident.: NO-170-00005596.0001001 / 23 MAY 08

Applicable to: ALL

When the pilot sets TOGA thrust for go-around, it takes some time for the engines to spool up due to the acceleration capability of the high by pass ratio engines. Therefore, the pilot must be aware that the aircraft will initially lose some altitude. This altitude loss will be greater if initial thrust is close to idle and/or the aircraft speed is lower than

VAPP.

altitude loss following a go-around

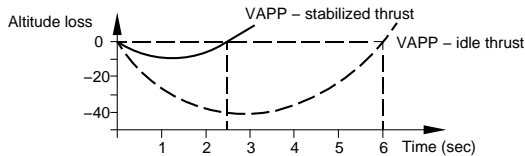

LEAVING THE GO-AROUND PHASE

Ident.: NO-170-00005597.0001001 / 26 MAR 08

Applicable to: ALL

The purpose of leaving the go-around phase is to obtain the proper target speed and proper predictions depending upon the strategy chosen by the crew. During the missed approach, the crew will elect either of the following strategies:

- Fly a second approach
- Carry out a diversion

SECOND APPROACH

If a second approach is to be flown, the crew will activate the approach phase in the MCDU PERF GO-AROUND page. The FMS switches to Approach phase and the target speed moves according to the flaps lever setting, e.g. green dot for Flaps 0. The crew will ensure proper waypoint sequencing during the second approach in order to have the missed approach route available, should a further go-around be required.

DIVERSION

Once the aircraft path is established and clearance has been obtained, the crew will modify the FMGS to allow the FMGS switching from go-around phase to climb phase:

- If the crew has prepared the ALTN FPLN in the active F-PLN, a lateral revision at the TO WPT is required to access the ENABLE ALTN prompt. On selecting the ENABLE ALTN prompt, the lateral mode reverts to HDG if previously in NAV. The aircraft will be flown towards the next waypoint using HDG or NAV via a DIR TO entry.
- If the crew has prepared the ALTN FPLN in the SEC F-PLN, the SEC F-PLN will be activated, and a DIR TO performed as required. AP/FD must be in HDG mode for the ACTIVATE SEC F-PLN prompt to be displayed.

- If the crew has not prepared the ALTN FPLN, a selected climb will be initiated. Once established in climb and clear of terrain, the crew will make a lateral revision at any waypoint to insert a NEW DEST. The route and a CRZ FL (on PROG page) can be updated as required.

REJECTED LANDING

Ident.: NO-170-00005598.0001001 / 24 APR 08

Applicable to: ALL

A rejected landing is defined as a go-around manoeuvre initiated below the minima. Once the decision is made to reject the landing, the flight crew must be committed to proceed with the go-around manoeuvre and not be tempted to retard the thrust levers in a late decision to complete the landing.

TOGA thrust must be applied but a delayed flap retraction should be considered. If the aircraft is on the runway when thrust is applied, a CONFIG warning will be generated if the flaps are in conf full. The landing gear should be retracted when a positive climb is established with no risk of further touch down. Climb out as for a standard go-around. In any case, if reverse thrust has been applied, a full stop landing must be completed.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

GO AROUND

Intentionally left blank



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

NORMAL OPERATIONS

TAXI IN

BRAKE FANS r

Ident.: NO-180-00005601.0001001 / 21 APR 08

Applicable to: ALL

The use of brake fans could increase oxidation of the brake surface hot spots if brakes are not thermally equalized, leading to the rapid degradation of the brakes. For this reason, selection of brake fans should be delayed until approximately 5 min after touchdown or just prior to stopping at the gate (whichever occurs first). Selecting brake fans before reaching the gate allows avoiding blowing carbon brake dust on ground personal.

BRAKE TEMPERATURE

Ident.: NO-180-00005602.0001001 / 23 MAY 08

Applicable to: MSN 1320-1637, 1777-2180

If there is a significant difference in brake temperature between the wheels of the same gear, when reaching the gate, this materializes a potential problem with brake and a maintenance action is due e.g. if one wheel reaches the limit temperature of 600 °C while all others wheels brakes indicate less than 450 °C, this indicates that there is a potential problem of brake binding or permanent brake application on that wheel. Conversely, if one wheel brake is at or below 60 °C whereas the others are beyond 210 °C, this indicates that there is a potential loss of braking on that wheel. Selecting brake fans r before reaching the gate allows avoiding blowing carbon brake dust on ground personal.

If brake temperature is above 500 °C with fans OFF r (350 °C fans ON r), use of the parking brake, unless operationally necessary, should be avoided to prevent brake damage.

If one brake temperature exceeds 900 °C, a maintenance action is due.

The MEL provides information regarding brake ground cooling time, both with and without brake fans r.

BRAKE TEMPERATURE

Ident.: NO-180-00005602.0003001 / 23 MAY 08

Applicable to: MSN 0781-0852, 1720

If there is a significant difference in brake temperature between the wheels of the same gear, when reaching the gate, this materializes a potential problem with brake and a maintenance action is due. e.g. if one wheel reaches the limit temperature of 600 °C while all others wheels brakes indicate less than 450 °C, this indicates that there is a



potential problem of brake binding or permanent brake application on that wheel. Conversely, if one wheel brake is at or below 60 °C whereas the others are beyond 210 °C, this indicates that there is a potential loss of braking on that wheel. Selecting brake fans **☑** before reaching the gate allows avoiding blowing carbon brake dust on ground personal.

If brake temperature is above 500 °C with fans OFF **☑** (350 °C fans ON **☑**), use of the parking brake, unless operationally necessary, should be avoided to prevent brake damage.

If one brake temperature exceeds 800 °C, a maintenance action is due.

The MEL provides information regarding brake ground cooling time, both with and without brake fans **☑**.

ENGINES COOLING PERIOD

Ident.: NO-180-00005604.0001001 / 26 MAR 08

Applicable to: ALL

To avoid engine thermal stress, it is required that the engine be operated at, or near, idle for a cooling period as described in FCOM (*Refer to FCOM/PRO-NOR-SOP-25-A PARKING - ENG MASTER 1 AND 2*)

TAXI WITH ONE ENGINE SHUTDOWN

Ident.: NO-180-00005605.0001001 / 26 MAR 08


Applicable to: ALL

Refer to NO-040 TAXI WITH ONE ENGINE SHUTDOWN

AFTER LANDING FLOW PATTERN

Ident.: NO-180-00005606.0001001 / 26 MAR 08

Applicable to: ALL

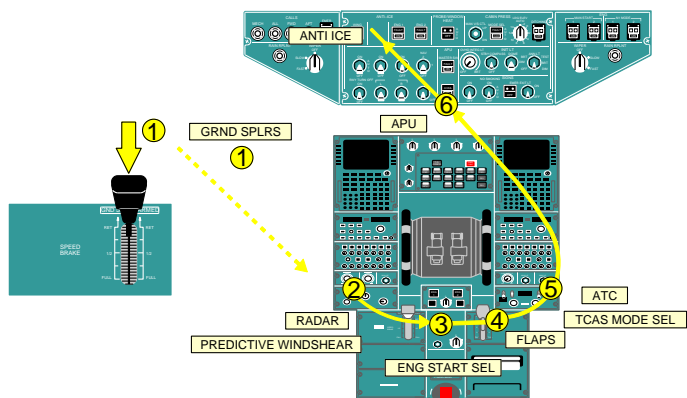AFTER LANDING FLOW PATTERN
PF
PNF




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL


NORMAL OPERATIONS

TAXI IN

Intentionally left blank

ABNORMAL OPERATIONS

Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS PRELIMINARY PAGES TABLE OF CONTENTS
---	---

AO-PLP. PRELIMINARY PAGES

TABLE OF CONTENTS	1/2
-------------------------	-----

AO-010. GENERAL

PREFACE	1/6
LANDING DISTANCE PROCEDURE	1/6
Vapp DETERMINATION	1/6
IN FLIGHT LANDING DISTANCE CALCULATION FOLLOWING FAILURES	4/6

AO-020. OPERATING TECHNIQUES

LOW SPEED ENGINE FAILURE.....	1/16
REJECTED TAKEOFF	1/16
INTRODUCTION TO EMERGENCY EVACUATION	4/16
The Emergency Evacuation Procedure	5/16
TASKSHARING IN CASE OF EMERGENCY EVACUATION	7/16
ENGINE FAILURE AFTER V1	7/16
ENGINE FAILURE DURING INITIAL CLIMB-OUT	11/16
ENGINE FAILURE DURING CRUISE	11/16
ENGINE-OUT LANDING	14/16
CIRCLING ONE ENGINE INOPERATIVE.....	14/16
ONE ENGINE INOPERATIVE GO-AROUND	15/16
Thrust Levers Management in case of Inoperative Reverser(s).....	15/16

AO-022. AUTOFLIGHT

FMGC FAILURE	1/2
--------------------	-----

AO-024. ELECTRICAL


INTRODUCTION TO EMERGENCY ELECTRICAL CONFIGURATION	1/2
TECHNICAL BACKGROUND	1/2
GENERAL GUIDELINES	1/2
REMAINING SYSTEMS.....	2/2

AO-026. FIRE PROTECTION

PREFACE	1/6
SMOKE DETECTION AND PROCEDURE APPLICATION.....	1/6
COORDINATION WITH CABIN CREW	2/6
SMOKE/FUMES/AVNCS SMOKE PAPER PROCEDURE	3/6
CARGO SMOKE	5/6

AO-027. FLIGHT CONTROLS

ABNORMAL FLAPS/SLATS CONFIGURATION	1/2
--	-----

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS PRELIMINARY PAGES TABLE OF CONTENTS
---	--

AO-028. FUEL	
FUEL LEAK.....	1/2
AO-029. HYDRAULIC	
HYDRAULIC GENERATION PARTICULARITIES.....	1/4
DUAL HYDRAULIC FAILURES	1/4
REMAINING SYSTEMS.....	3/4
AO-032. LANDING GEAR	
LDG WITH ABNORMAL L/G.....	1/2
Nose Wheel Steering Fault	2/2
AO-034. NAVIGATION	
ADR/IRS FAULT.....	1/8
UNRELIABLE AIRSPEED INDICATIONS	1/8
ADR CHECK PROC / UNRELIABLE SPEED INDICATION QRH PROCEDURE.....	4/8
DUAL RADIO ALTIMETER FAILURE.....	8/8
AO-070. POWER PLANT	
ALL ENGINE FLAMEOUT.....	1/2
AO-090. MISCELLANEOUS	
EMERGENCY DESCENT.....	1/6
OVERWEIGHT LANDING	3/6
CREW INCAPACITATION.....	4/6

PREFACE

Ident.: AO-010-00005607.0001001 / 26 MAR 08

Applicable to: ALL

The ABNORMAL OPERATIONS chapter highlights techniques that will be used in some abnormal and emergency operations. Some of the procedures discussed in this chapter are the result of double or triple failures. Whilst it is very unlikely that any of these failures will be encountered, it is useful to have a background understanding of the effect that they have on the handling and management of the aircraft. In all cases, the ECAM should be handled as described in FCTM (*Refer to OP-040 PURPOSE OF THE ECAM*).

LANDING DISTANCE PROCEDURE

Ident.: AO-010-00005608.0001001 / 26 MAR 08

Applicable to: ALL

Should a failure occur with "LANDING DISTANCE PROC....APPLY" message displayed on the ECAM STATUS page, the crew will enter the LDG CONF/APP SPD/LDG DIST/ CORRECTIONS FOLLOWING FAILURES table in QRH abnormal procedures and read:

- The flap lever position for landing
- Delta VREF if required for VAPP determination
- The landing distance factor for landing distance calculation

VAPP DETERMINATION

Ident.: AO-010-00005609.0001001 / 01 JUL 08

Applicable to: ALL

BACKGROUND

Some failures affect the approach speed.

- Some failures (typically slat or flap failure) increase the VLS. In this case, the VLS displayed on the PFD (if available) takes into account the actual configuration.
- In some others failures, it is required to fly at speed higher than VLS to improve the handling characteristics of the aircraft. This speed increment is to be added to the VLS displayed on the PFD when the landing configuration is reached.

In order to prepare the approach and landing, the crew needs to calculate the VAPP in advance. The appropriate VLS is not necessarily available at that time on the PFD, because the landing configuration is not yet established. Hence, VAPP is determined

using VREF, which is the VLS of CONF FULL, and is available both in the MCDU PERF APPR page and the QRH part 2. $\Delta VREF$, extracted from the QRH part 2, is then added.

$VAPP = VREF + \Delta VREF + APPRoach CORrection$

The APPRoach CORrection (APPR COR) takes into account:

- The use of A/THR
- Ice accretion if applicable and
- Wind correction when required.

METHOD

- If QRH shows a $\Delta VREF$

VAPP computation principle with $\Delta VREF$

APPR

DEST	FLP RETR	FINAL
QNH	F= 162	ILS14R
TEMP	SLT RETR	MDA
20°	S= 186	688
MAG WIND	CLEAN	DH
200° /005	O= 234	1.1
TRANS ALT		
5000		
VAPP		
140		
PREV		
<PHASE		

LDG CONF
CONF 3°
FULL
NEXT
PHASE>

LDG CONF - APPR SPD - LDG DIST CORRECTIONS FOR FAILURES

FLAPS/SLATS				
HYD				
BRK				
NAV				
ENG				

Select CONF FULL
Read VREF = VLS CONF FULL

Add $\Delta VREF$ to VREF

APPRoach CORrection		
if $\Delta VREF \leq 10$ kt (1)	if 10 kt $< \Delta VREF < 20$ kt	if $\Delta VREF \geq 20$ kt
APPR COR is the Highest of 5 kt (2) if A/THR ON pr in case of ice accretion (3)	1/3 Headwind Max = 15 kt	APPR COR = 1/3 Headwind Max = 10 kt
APPR COR = 0 kt		

Add APPRoach CORrection

Enter VAPP manually
Select CONF 3, if LDG in CONF 3

VAPP
5000
160
PREV

APPR

DEST	FLP RETR	FINAL
QNH	F= 162	ILS14R
TEMP	SLT RETR	MDA
20°	S= 186	688
MAG WIND	CLEAN	DH
200° /005	O= 234	1.1
TRANS ALT		
5000		
VAPP		
160		
PREV		
<PHASE		

LDG CONF
CONF 3°
FULL
NEXT
PHASE>

- (1) For $\Delta VREF \leq 10$ kt: apply speed increment to the VAPP and/or additional factor to the landing distance if applicable (See (2) and See (3))
- (2) Multiply the landing distance by an additional factor of 1.1
- (3) In CONF 3, add another 5 kt speed increment and multiply

the landing distance by an additional factor of 1.2 (instead of 1.1)

Then, if landing in CONF 3 is required, select CONF 3 on the MCDU (this ensures proper operation of the GPWS).

When fully configured in final approach, the crew will check the reasonableness of the final approach speed computed by the crew with regard to VLS on the PFD speed scale.

- **If the QRH shows no $\Delta VREF$:**

The flight crew can use the MCDU VAPP, as computed by the FMS (the FMS takes systematically into account the use of A/THR).

IN FLIGHT LANDING DISTANCE CALCULATION FOLLOWING FAILURES

Ident.: AO-010-00005610.0001001 / 01 JUL 08

Applicable to: ALL


GENERAL

The actual landing distance (from 50 ft above the runway surface until the aircraft comes to the complete stop) is measured during specific flight tests for the certification of the aircraft. This distance represents the absolute performance capability of the aircraft. It is published without safety margin under the name "LANDING DISTANCE WITHOUT AUTOBRAKE" in the QRH.

To compute the actual landing distance following any failure affecting the landing performance, the crew multiplies the "LANDING DISTANCE WITHOUT AUTOBRAKE" CONFIGURATION FULL by the associated landing distance factor found in the QRH. This actual landing distance following a failure is computed with no safety margin.

The flight crew checks this actual landing distance against the Landing Distance Available (LDA) of the runway used for landing applying the relevant safety margins. The safety margins to be applied depend of the circumstances according to:

-

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS GENERAL
---	--

Note: For example:



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

ABNORMAL OPERATIONS
GENERAL

Intentionally left blank

LOW SPEED ENGINE FAILURE

Ident.: AO-020-00005612.0001001 / 26 MAR 08

Applicable to: ALL

If an engine failure occurs at low speed, the resultant yaw may be significant, leading to rapid displacement from the runway centreline. For this reason, it is essential that the Captain keeps his hand on the thrust levers once take-off thrust has been set. Directional control is achieved by immediately closing the thrust levers and using maximum rudder and braking. If necessary, the nosewheel tiller should be used to avoid runway departure.

REJECTED TAKEOFF

Ident.: AO-020-00005614.0001001 / 03 JUL 08

Applicable to: ALL

FACTORS AFFECTING RTO

Experience has shown that a rejected takeoff can be hazardous, even if correct procedures are followed. Some factors that can detract from a successful rejected takeoff are as follows:

- Tire damage
- Brakes worn or not working correctly
- Error in gross weight determination
- Incorrect performance calculations
- Incorrect runway line-up technique
- Initial brake temperature
- Delay in initiating the stopping procedure
- Runway friction coefficient lower than expected

Thorough pre-flight preparation and a conscientious exterior inspection can eliminate the effect of some of these factors.

During the taxi-out, a review of the takeoff briefing is required. During this briefing, the crew should confirm that the computed takeoff data reflects the actual takeoff conditions e.g. wind and runway condition. Any changes to the planned conditions require the crew to re-calculate the takeoff data. In this case, the crew should not be pressurised into accepting a takeoff clearance before being fully ready. Similarly, the crew should not accept an intersection takeoff until the takeoff performance has been checked.

The line-up technique is very important. The pilot should use the over steer technique to minimize field length loss and consequently, to maximize the acceleration-stop

distance available.

DECISION MAKING

A rejected takeoff is a potentially hazardous manoeuvre and the time for decision-making is limited. To minimize the risk of inappropriate decisions to reject a takeoff, many warnings and cautions are inhibited between 80 kt and 1 500 ft. Therefore, any warnings received during this period must be considered as significant.

To assist in the decision making process, the takeoff is divided into low and high speeds regimes, with 100 kt being chosen as the dividing line. The speed of 100 kt is not critical but was chosen in order to help the Captain make the decision and to avoid unnecessary stops from high speed:

- Below 100 kt, the Captain will seriously consider discontinuing the takeoff if any ECAM warning/caution is activated.
- Above 100 kt, and approaching V1, the Captain should be "go-minded" and only reject the takeoff in the event of a major failure, sudden loss of thrust, any indication that the aircraft will not fly safely, any red ECAM warning, or any amber ECAM caution listed below:
 - F/CTL SIDESTICK FAULT
 - ENG FAIL
 - ENG REVERSER FAULT
 - ENG REVERSE UNLOCK

If a tire fails within 20 kt of V1, unless debris from the tire has caused noticeable engine parameter fluctuations, it is better to get airborne, reduce the fuel load and land with a full runway length available.

The decision to reject the takeoff is the responsibility of the Captain and must be made prior to V1 speed:

- If a malfunction occurs before V1, for which the Captain does not intend to reject the takeoff, he will announce his intention by calling "GO".
- If a decision is made to reject the takeoff, the Captain calls "STOP". This call both confirms the decision to reject the takeoff and also states that the Captain now has control. It is the only time that hand-over of control is not accompanied by the phrase "I have control".

RTO PROCEDURE

Should a RTO procedure is initiated, the following task sharing will be applied.

CAPT	F/O
RTO.....Announce Thrust levers.....IDLE Reverse thrust.....MAX AVAIL	Reversers.....Check/Announce Deceleration...Check/Announce (1) Cancel any audio warning
<u>Aircraft stopped</u> Reverse.....Stowed Parking brake.....Apply Cabin Crew (PA).....Alert Order ECAM Actions	Advise ATC Locate EMER EVAC Procedure Achieve ECAM Actions


(1): Announcing the deceleration means that the deceleration is felt by the crew, and confirmed by the Vc trend on the PFD. The deceleration may also be confirmed by the DECEL light (if the autobrake is on). However, this light only comes on when the actual deceleration is 80 % of the selected rate, it is not an indicator of the proper autobrake operation. For instance, the DECEL light might not appear on a contaminated runway, with the autobrake working properly, due to the effect of the antiskid.

If the takeoff is rejected prior to 72 kt, the spoilers will not deploy and the auto-brake will not function.

If a rejected takeoff is initiated and MAX auto brake decelerates the aircraft, the captain will avoid pressing the pedals (which might be a reflex action). Conversely, if deceleration is not felt, the captain will press the brake pedals fully down.

If takeoff has been rejected due to an engine fire, the ECAM actions will be completed until shutting down the remaining engines.

Rejected takeoff flow pattern

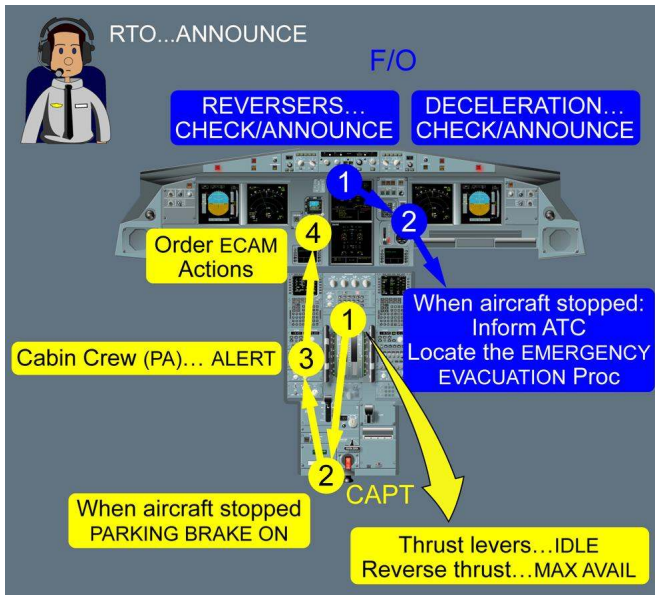

INTRODUCTION TO EMERGENCY EVACUATION

Ident.: AO-020-00005615.0001001 / 22 MAY 08

Applicable to: ALL

GENERAL

The typical case, which may require an emergency evacuation, is an uncontrollable on ground engine fire. This situation, which may occur following a rejected takeoff or after landing, requires good crew coordination to cope with a high workload situation:

- In the rejected takeoff case, the Captain calls "STOP". This confirms that the Captain has controls
- In all other cases, the Captain calls "I HAVE CONTROLS" if required, to state the control hand over.

DECISION MAKING

As soon as aircraft is stopped, and the parking brake is set, the captain notifies the cabin crew and calls for ECAM ACTIONS. At this stage, the task sharing is defined as

follow:

- The first officer carries out the ECAM actions until shutting down the remaining engine
- The captain builds up his decision to evacuate depending on the circumstances. Considerations should be given to:
 - Fire remaining out of control after having discharged the agents
 - Possible passenger evacuation of the aircraft on the runway
 - Positioning the aircraft to keep the fire away from the fuselage, taking into account the wind direction
 - Communicating intentions or requests to ATC.

If fire remains out of control after having discharged the fire agents, the captain calls for the **EMERGENCY EVACUATION** procedure located in the inside back cover of the QRH.

THE EMERGENCY EVACUATION PROCEDURE

Ident.: AO-020-00005626.0001001 / 22 MAY 08

Applicable to: ALL

Some items need to be highlighted:

- It is essential that the differential pressure be zeroed.
In automatic pressurization mode, the crew can rely on the CPC, and the Delta P check is therefore not applicable.
If MAN CAB PRESS is used in flight, the CAB PR SYS (1+2) FAULT procedure requires selecting MAN V/S CTL to FULL UP position during final approach to cancel any residual cabin pressure.
However, since the residual pressure sensor indicator, installed in the cabin door, is inhibited with slides armed, an additional Delta P check is required by the **EMERGENCY EVACUATION** procedure.
Since MAN CAB PRESS is never used for takeoff as at least one automatic cabin pressure control must be operative for departure, the Delta P check does not apply to the case of emergency evacuation following a rejected takeoff.
- CABIN CREW (PA)...ALERT reminds the captain for the "CABIN CREW AT STATION" call out. (In case of RTO, this is done during the RTO flow pattern).
Cabin crew must be aware that the flight crew is still in control of the situation. In certain circumstances, this will avoid any unwanted or unnecessary evacuation initiated by the cabin crew

- EVACUATION...INITIATE requires the captain confirmation that the emergency evacuation is still required. If still required, the captain:

- Notifies the cabin crew to start the evacuation
- Activates the EVAC command
- Advises ATC if required.

This will be done preferably in this order for a clear understanding by cabin crew.

On ground with engines stopped, only the right dome light is operational and the three positions (BRT, DIM, OFF) of the DOME light sw remain available, allowing the **EMERGENCY EVACUATION** procedure completion.


The crew will keep in mind that as long as the evacuation order is not triggered, the crew may differ or cancel the passengers' evacuation. As soon as the evacuation order is triggered, this decision is irreversible.

When aircraft is on batteries power, the crew seats can only be operated mechanically.

TASKSHARING IN CASE OF EMERGENCY EVACUATION

Ident.: AO-020-00005628.0001001 / 24 APR 08

Applicable to: ALL

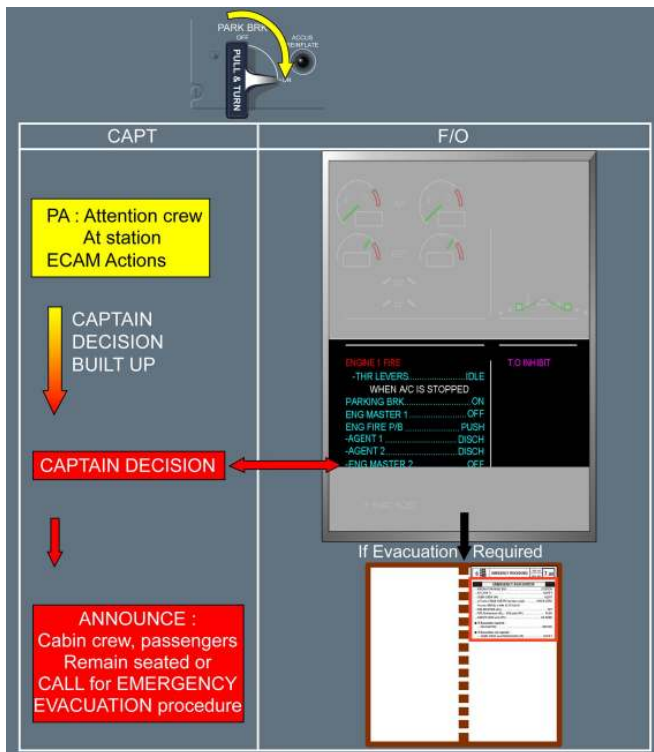

When applying the **EMERGENCY EVACUATION** procedure, the F/O can select the engine masters OFF and push the FIRE pb, without any confirmation from the Captain.

ENGINE FAILURE AFTER V1

Ident.: AO-020-00005617.0001001 / 22 MAY 08

Applicable to: ALL

AIRCRAFT HANDLING

If an engine fails after V1 the takeoff must be continued. The essential and primary

tasks are linked to aircraft handling. The aircraft must be stabilized at the correct pitch and airspeed, and established on the correct track prior to the initiation of the ECAM procedure.

ON THE GROUND:

Rudder is used conventionally to maintain the aircraft on the runway centreline. At VR, rotate the aircraft smoothly, at a slower rate than with all engines operation, using a continuous pitch rate to an initial pitch attitude of 12.5 °. The combination of high FLEX temperature and low V speeds requires precise handling during the rotation and lift off. The 12.5 ° pitch target will ensure the aircraft becomes airborne.

WHEN SAFELY AIRBORNE:

The SRS orders should then be followed which may demand a lower pitch attitude to acquire or maintain V2.

With a positive rate of climb and when the Radio Altitude has increased, the PNF will call "positive climb". This will suggest to the PF for landing gear retraction. Shortly after lift off, the lateral normal law commands some rudder surface deflection to minimize the sideslip (there is no feedback of this command to the pedals). Thus, the lateral behavior of the aircraft is safe and the pilot should not be in a hurry to react on the rudder pedals and to chase the beta target.

The blue beta target will replace the normal sideslip indication on the PFD. Since the lateral normal law does not command the full needed rudder surface deflection, the pilot will have to adjust conventionally the rudder pedals to center the beta target.

When the beta target is centred, total drag is minimized even though there is a small amount of sideslip. The calculation of the beta target is a compromise between drag produced by deflection of control surfaces and airframe drag produced by a slight sideslip. Centering the beta target produces less total drag than centering a conventional ball, as rudder deflection, aileron deflection, spoiler deployment and aircraft body angle are all taken into account.

The crew will keep in mind that the yaw damper reacts to a detected side slip. This means that, with hands off the stick and no rudder input, the aircraft will bank at about 5 ° maximum and then, will remain stabilized. Thus, laterally, the aircraft is a stable platform and no rush is required to laterally trim the aircraft. Control heading conventionally with bank, keeping the beta target at zero with rudder. Accelerate if the beta target cannot be zeroed with full rudder. Trim the rudder conventionally.

The use of the autopilot is **STRONGLY** recommended. Following an engine failure, the rudder should be trimmed out prior to autopilot engagement.

Once AP is engaged, the rudder trim is managed through the AP and, hence, manual rudder trim command, including reset, is inhibited.

THRUST CONSIDERATIONS

Consider the use of TOGA thrust, keeping in mind the following:

- For a FLEX takeoff, selecting the operating engine to TOGA provides additional performance margin but is not a requirement of the reduced thrust takeoff certification. The application of TOGA will very quickly supply a large thrust increase but this comes with a significant increase in yawing moment and an increased pitch rate. The selection of TOGA restores thrust margins but it may be at the expense of increased workload in aircraft handling.
- TOGA thrust is limited to 10 min.

PROCEDURE

INITIATION OF THE PROCEDURE

The PNF will closely monitor the aircraft's flight path. He will cancel any Master Warning/Caution and read the ECAM title displayed on the top line of the E/WD. Procedures are initiated on PF command. No action is taken (apart from cancelling audio warnings through the MASTER WARNING light) until:

- The appropriate flight path is established and,
- The aircraft is at least 400 ft above the runway, if a failure occurs during takeoff, approach or go-around.

A height of 400 ft is recommended because it is a good compromise between the necessary time for stabilization and the excessive delay in procedure initiation. In some emergency cases and provided the flight path is established, the PF may initiate the ECAM actions before 400 ft.

Once the PF has stabilised the flight path, the PNF confirms the failure. If it is necessary to delay the ECAM procedure, the PF should order "Standby", otherwise he should announce "ECAM actions".

Priority must be given to the control of aircraft trajectory, and acceleration phase should not be delayed for the purpose of applying the ENG FAIL ECAM procedure. Should the PF require an action from the PNF during ECAM procedures, the order "STOP ECAM" should be used. When ready to resume ECAM procedure, the order "CONTINUE ECAM" should be used.

The procedure may be continued until "ENG MASTER OFF" (in case of engine failure without damage) or until AGENT 1 DISCH (in case of engine failure with damage) before acceleration.

Note: In case of ENG FIRE, fire drill remains high priority.

ACCELERATION SEGMENT

At the engine-out acceleration altitude, push ALT to level off and allow the speed to increase. If the aircraft is being flown manually, the PF should remember that, as airspeed increases, the rudder input needed to keep the beta target centred will reduce. Retract the flaps as normal. When the flap lever is at zero, the beta target reverts to the normal sideslip indication.

FINAL TAKEOFF SEGMENT

As the speed trend arrow reaches Green Dot speed, pull for OPEN CLIMB, set THR MCT when the LVR MCT message flashes on the FMA (triggered as the speed index reaches green dot) and resume climb using MCT. If the thrust lever are already in the FLX/MCT detent, move lever to CL and then back to MCT. When an engine failure occurs after takeoff, noise abatement procedures are no longer a requirement. Additionally, the acceleration altitude provides a compromise between obstacle clearance and engine thrust limiting time. It allows the aircraft to be configured to Flap 0 and green dot speed, which provides the best climb gradient.


Once established on the final takeoff flight path, continue the ECAM until the STATUS is displayed. At this point, the AFTER T/O checklist should be completed, computer reset considered and OEBS consulted (if applicable). STATUS should then be reviewed.

ONE ENGINE OUT FLIGHT PATH

The one engine out flight path will be flown according to the takeoff briefing made at the gate:

- The EOSID (with attention to the decision point location)
- The SID
- Radar vectors...

Engine failure after V1

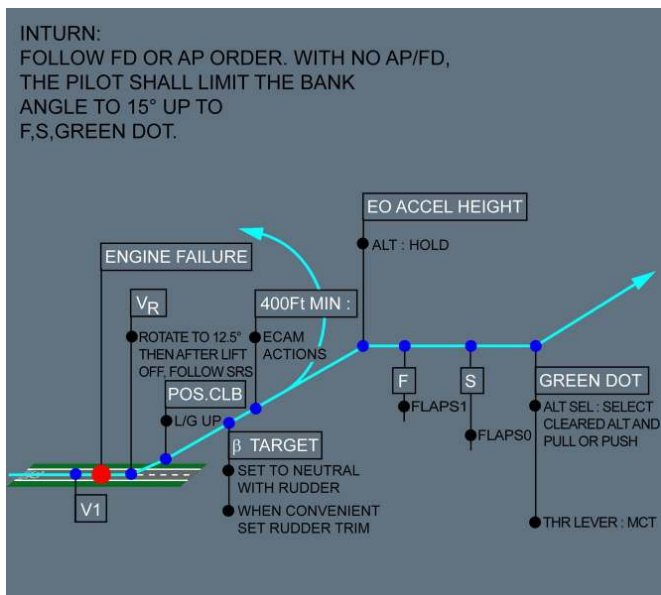

ENGINE FAILURE DURING INITIAL CLIMB-OUT

Ident.: AO-020-00005619.0001001 / 26 MAR 08

Applicable to: ALL

Proceed as above. If the failure occurs above V2 however, maintain the SRS commanded attitude. In any event the minimum speed must be V2.

When an engine failure is detected, the FMGS produces predictions based on the engine-out configuration and any pre-selected speeds entered in the MCDU are deleted.

ENGINE FAILURE DURING CRUISE

Ident.: AO-020-00005620.0001001 / 22 MAY 08

Applicable to: ALL

GENERAL

There are three strategies available for dealing with an engine failure in the cruise:

- The standard strategy

- The obstacle strategy
- The fixed speed strategy

The fixed speed strategy refers to ETOPS. It is discussed in FCOM 2 "special operations" and is discussed in a separate course.

Unless a specific procedure has been established before dispatch (considering ETOPS or mountainous areas), the standard strategy is used.

Note: *Pressing the EO CLR key on the MCDU restores the all engine operative predictions and performance. Reverting to one engine-out performance again is not possible.*

PROCEDURE

As soon as the engine failure is recognized, the PF will simultaneously:

- Set MCT on the remaining engine(s)
- Disconnect A/THR


Then, PF will

- Select the SPEED according to the strategy
- If appropriate, select a HDG to keep clear of the airway, preferably heading towards an alternate. Consideration should be given to aircraft position relative to any relevant critical point
- Select the appropriate engine inoperative altitude in the FCU ALT window and pull for OPEN DES

Then, PF will

- Require the ECAM actions

At high flight levels close to limiting weights, crew actions should not be delayed, as speed will decay quickly requiring prompt crew response. The crew will avoid decelerating below green dot.

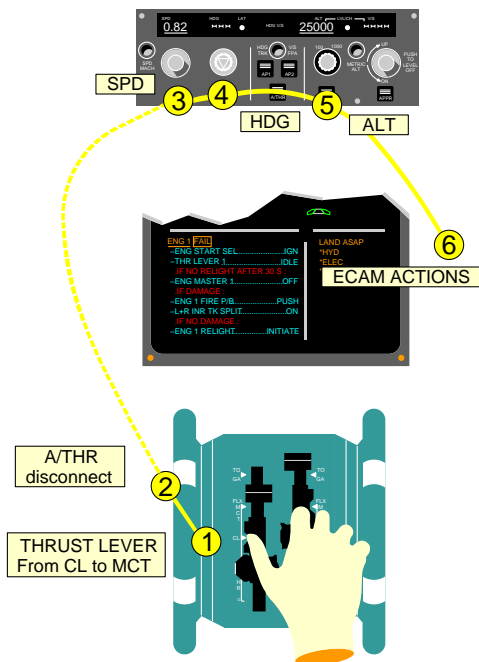

The A/THR is disconnected to avoid any engine thrust reduction when selecting speed according to strategy or when pulling for OPEN DES to initiate the descent. With the A/THR disconnected, the target speed is controlled by the elevator when in OPEN DES.

Carrying out the ECAM actions should not be hurried, as it is important to complete the drill correctly. Generally, there will be sufficient time to cross check all actions.

STANDARD STRATEGY

Set speed target M 0.78/300 kt. The speed of 0.78/300 kt is chosen to ensure the aircraft is within the stabilised windmill engine relight in-flight envelope.

The REC MAX EO Cruise altitude, which equates to LRC with anti-icing off, is displayed on the MCDU PROG page and should be set on the FCU. (One engine out gross ceiling at long-range speed is also available in the QRH in case of double FM failure).

If V/S becomes less than 500 ft/min, select V/S - 500 ft/min and A/THR on. This is likely to occur as level off altitude is approached.

Once established at level off altitude, long-range cruise performance with one engine

out may be extracted from QRH or *Refer to FCOM/PER-CRZ-OEI-GEN-10 PROCEDURE.*

OBSTACLE STRATEGY

To maintain the highest possible level due to terrain, the drift down procedure must be adopted. The speed target in this case is green dot. The procedure is similar to the standard strategy, but as the speed target is now green dot, the rate and angle of descent will be lower.

The MCDU PERF CRZ page in EO condition will display the drift down ceiling, assuming green dot speed and should be set on FCU. (One engine out gross ceiling at green dot speed is also available in the QRH and FCOM).

If, having reached the drift down ceiling altitude, obstacle problems remain, the drift down procedure must be maintained so as to fly an ascending cruise profile.

When clear of obstacles, set LRC ceiling on FCU, return to LRC speed and engage A/THR.

ENGINE-OUT LANDING

Ident.: AO-020-00005622.0001001 / 22 APR 08

Applicable to: ALL

Autoland is available with one engine inoperative, and maximum use of the AP should be made to minimise crew workload. If required, a manual approach and landing with one engine inoperative is conventional. The pilot should trim to keep the slip indication centred. It remains yellow as long as the thrust on the remaining engine(s) is below a certain value.

With flap selected and above this threshold value, the indicator becomes the blue beta target. This is a visual cue that the aircraft is approaching its maximum thrust capability.

Do not select the gear down too early, as large amounts of power will be required to maintain level flight at high weights and/or high altitude airports.

To make the landing run easier, the rudder trim can be reset to zero in the later stages of the approach. On pressing the rudder trim reset button, the trim is removed and the pilot should anticipate the increased rudder force required. With rudder trim at zero, the neutral rudder pedal position corresponds to zero rudder and zero nose wheel deflection.

CIRCLING ONE ENGINE INOPERATIVE

Ident.: AO-020-00005623.0001001 / 26 MAR 08

Applicable to: ALL

In normal conditions, circling with one engine inoperative requires the down wind leg to

be flown in CONF 3, with landing gear extended.

In hot and high conditions and at high landing weight, the aircraft may not be able to maintain level flight in CONF 3 with landing gear down. The flight crew should check the maximum weight showed in the QRH CIRCLING APPROACH WITH ONE ENGINE INOPERATIVE procedure table. If the landing weight is above this maximum value, the landing gear extension should be delayed until established on final approach.

If the approach is flown at less than 750 ft RA, the warning "L/G NOT DOWN" will be triggered. "TOO LOW GEAR" warning is to be expected, if the landing gear is not downlocked at 500 ft RA. Therefore, if weather conditions permit, it is recommended to fly a higher circling pattern.

ONE ENGINE INOPERATIVE GO-AROUND

Ident.: AO-020-00005624.0001001 / 26 MAR 08

Applicable to: ALL

A one engine inoperative go-around is similar to that flown with all engines. On the application of TOGA, rudder must be applied promptly to compensate for the increase in thrust and consequently to keep the beta target centred. Provided the flap lever is selected to Flap 1 or greater, SRS will engage and will be followed. If SRS is not available, the initial target pitch attitude is 12.5 °. The lateral FD mode will be GA TRK and this must be considered with respect to terrain clearance. ALT should be selected at the engine inoperative acceleration altitude, with the flap retraction and further climb carried out using the same technique as described earlier in "ENGINE FAILURE AFTER V1" section.

THRUST LEVERS MANAGEMENT IN CASE OF INOPERATIVE REVERSER(S)

Ident.: AO-020-00006319.0002001 / 25 JUN 08

Applicable to: ALL

PREFACE

This section provides recommendations on thrust levers management in case of inoperative reverser(s). These recommendations are applicable in case of in-flight failure (including engine failure) and/or in case of MEL dispatch with reverser(s) deactivated.

AT LEAST ONE REVERSER OPERATIVE

If at least one reverser is operative, the general recommendation is to select the reverser thrust on both engines during rejected takeoff (RTO) and at landing, as per normal procedures.

Note: The **ENG 1(2) REVERSER FAULT** ECAM caution may be triggered after the reverser thrust is selected. This is to remind the flight crew that one reverser is inoperative.

CAUTION	In case of MEL dispatch with one reverser deactivated: If the ENG (affected side) REVERSE UNLOCKED ECAM caution is triggered during flight, the PF must not select the thrust lever on the affected engine at landing.
----------------	---

NO REVERSERS OPERATIVE

If no reversers are operative, the general recommendation is to not select the reverser thrust during RTO and at landing.

However, the PF still sets both thrust levers to the IDLE detent, as per normal procedures.

BRIEFING

IMPORTANCE OF THE FLIGHT CREW BRIEFING

Among others, the aircraft status must be reviewed during the flight crew briefing. Any particularities (operational consequences, procedures, associated task sharing and callout) must be reviewed at that time. The flight crew must notably review:

- The status of the thrust reversers and if reverser thrust can be used
- Operational effect (aircraft handling during roll-out).

FMGC FAILURE

Ident.: AO-022-00005631.0001001 / 26 MAR 08

Applicable to: ALL

SINGLE FMGC FAILURE

Should a single FMGC failure occur, the AP, if engaged on affected side, will disconnect. The AP will be restored using the other FMGC. The A/THR remains operative. Furthermore, flight plan information on the affected ND may be recovered by using same range as the opposite ND. The crew should consider a FMGC reset as detailed in QRH.

DUAL FMGC FAILURE

Should a dual FMGC failure occur, the AP/FD and A/THR will disconnect. The crew will try to recover both AP and A/THR by selecting them back ON (The AP and A/THR can be recovered if the FG parts of the FMGS are still available).

If both AP and A/THR cannot be recovered, the thrust levers will be moved to recover manual thrust. The pilot will switch off the FDs and select TRK / FPA to allow the blue track index and the bird to be displayed. The RMPs will be used to tune the NAVAIDs.

The crew will refer to the QRH for computer reset considerations and then will *Refer to FCOM/PRO-SUP-22-A AUTOMATIC FMGS RESET AND RESYNCHRONIZATION - FM RESET* to reload both FMGC as required.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

ABNORMAL OPERATIONS

AUTOFLIGHT

Intentionally left blank

INTRODUCTION TO EMERGENCY ELECTRICAL CONFIGURATION

Ident.: AO-024-00005633.0001001 / 26 MAR 08

Applicable to: ALL

The procedure discussed in this section is the EMERGENCY ELECTRICAL CONFIGURATION. Whilst it is very unlikely that this failure will be encountered, it is useful:

- To refresh on the technical background
- To recall the general guidelines that must be followed in such a case
- To outline the main available systems according to the electrical power source.

TECHNICAL BACKGROUND

Ident.: AO-024-00005673.0002001 / 26 MAR 08

Applicable to: ALL

The emergency electrical configuration is due to the loss of AC BUS 1 and 2. The RAT extends automatically. This powers the blue hydraulic circuit which drives the emergency generator. The emergency generator supplies both AC and DC ESS BUS.

Below 125 kt, the RAT stalls and the emergency generator is no longer powered. The emergency generation network is automatically transferred to the batteries and AC SHED ESS and DC SHED ESS BUS are shed.

Below 100 kt, the DC BAT BUS is automatically connected and below 50 kt, the AC ESS BUS is shed.

GENERAL GUIDELINES

Ident.: AO-024-00005674.0002001 / 26 MAR 08

Applicable to: ALL

As only PFD1 is available, the left hand seat pilot becomes PF. Once a safe flight path is established, and the aircraft is under control, ECAM actions will be carried out.

This is a serious emergency and ATC should be notified using appropriate phraseology ("MAYDAY"). Although the ECAM displays LAND ASAP in red, it would be unwise to attempt an approach at a poorly equipped airfield in marginal weather. However, prolonged flight in this configuration is not recommended.

AP/FD and ATHR are lost. The flight is to be completed manually in alternate and then, when gear down, in direct law. Crews should be aware that workload is immediately greatly increased.

As only the EWD is available, disciplined use of the ECAM Control Panel (ECP) is essential, (*Refer to OP-040 ECAM HANDLING*).

Consideration should be given to starting the APU as indicated by the ECAM and taking into account the probability to restore using APU generator.

A clear reading of STATUS is essential to assess the aircraft status and properly sequence actions during the approach.

The handling of this failure is referred to as a "complex procedure". A summary for handling the procedure is included in the QRH, which will be referred to upon completion of the ECAM procedure.

The ELEC EMER CONFIG SYS REMAINING list is available in QRH.

When landing gear is down, flight control law reverts to direct law.

The approach speed must be at least min RAT speed (140 kt) to keep the emergency generator supplying the electrical network.

The BSCU are lost. Consequently, the NWS and anti skid are lost. Alternate braking with yellow hydraulic pressure modulation up to 1 000 PSI will be used. Additionally, reversers are not available.

RA 1+2 are lost with their associated call out. Call out will be made by PNF.

Approaching 50 kt during the landing roll, all CRTs will be lost.

REMAINING SYSTEMS

Ident.: AO-024-00005675.0001001 / 26 MAR 08

Applicable to: ALL

The electrical distribution has been designed to fly, navigate, communicate and ensure passengers comfort. The ELEC EMER CONFIG SYS REMAINING list is available in QRH. The significant remaining systems are:

Significant remaining systems in ELEC EMER CONFIG	
FLY	PFD1, alternate law
NAVIGATE	ND1, FMGC1,, RMP1, VOR1/ILS1
COMMUNICATE	VHF1, HF1, ATC1

On BAT, some additional loads are lost such as FAC1 and FMGC1.

PREFACE

Ident.: AO-026-00005676.0001001 / 26 MAR 08

Applicable to: ALL

Fire and/or smoke in the fuselage present the crew with potentially difficult situations. Not only will they have to deal with the emergency itself but also the passengers are likely to panic should they become aware of the situation. It is essential therefore, that action to control the source of combustion is not delayed.

An immediate diversion should be considered as soon as the smoke is detected. If the source is not immediately obvious, accessible and extinguishable, it should be initiated without delay.

SMOKE DETECTION AND PROCEDURE APPLICATION

Ident.: AO-026-00005677.0001001 / 26 MAR 08

Applicable to: ALL


The smoke will be identified either by an ECAM warning, or by the crew without any ECAM warning.

If the smoke is detected by the crew, without any ECAM warning, the flight crew will refer directly to the QRH SMOKE/FUMES/AVNCS SMOKE paper procedure.

If the "AVIONICS SMOKE" ECAM caution is activated, the flight crew can refer directly to the QRH SMOKE/FUMES/AVNCS SMOKE paper procedure, or apply first the ECAM actions, before entering the QRH.

After the immediate actions, the ECAM displays a countdown (5 min). The flight crew will take the opportunity of this countdown to switch to paper procedure. When the paper procedure is entered, the flight crew will continue with this procedure, rather than coming back to the ECAM.

If another ECAM SMOKE warning (e.g. LAVATORY SMOKE) is triggered, the flight crew must apply the ECAM procedure. If any doubt exists about the smoke origin, the flight crew will then refer to the QRH SMOKE/FUMES/AVNCS SMOKE paper procedure

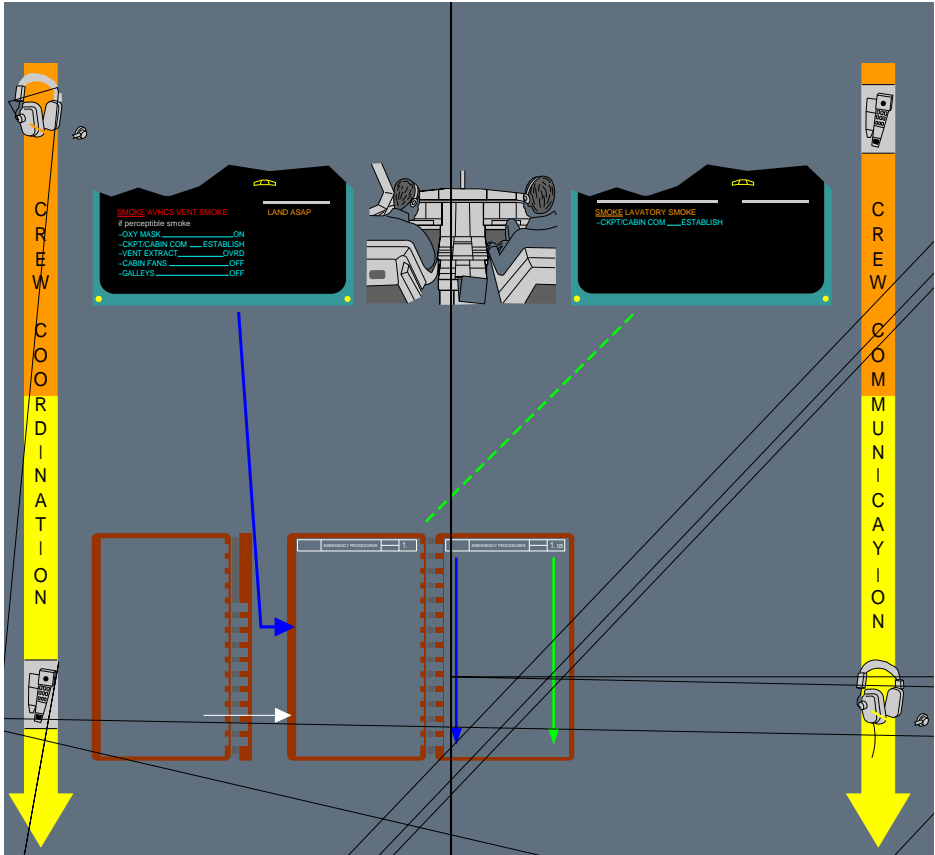smoke/fumes procedure architecture


SMOKE/FUMES/AVNCS SMOKE PAPER PROCEDURE

Ident.: AO-026-00005679.0001001 / 01 JUL 08

Applicable to: ALL


GENERAL

The SMOKE/FUMES/AVNCS SMOKE paper procedure implements a global philosophy that is applicable to both cabin and cockpit smoke cases. This philosophy includes the following main steps:

- Diversion to be anticipated
- Immediate actions
 - If smoke source not immediately isolated:
- Diversion initiation
- Smoke origin identification and fighting

Furthermore, at any time during the procedure application, if smoke/fumes becomes the greatest threat, the boxed items will be completed.

The main steps of this global philosophy may be visualized in the SMOKE/FUMES/AVNCS SMOKE QRH procedure.

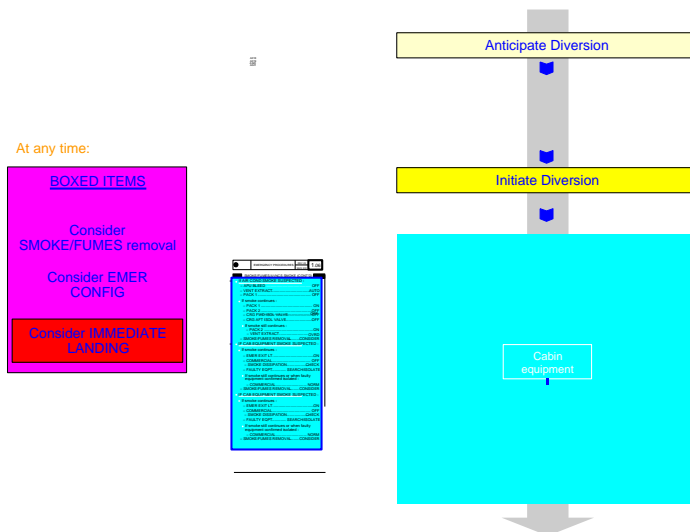SMOKE/FUMES/AVNCS SMOKE procedure presentation in QRH


CONSIDERATIONS ABOUT DIVERSION

Time is critical.

This is why a diversion must be immediately anticipated (as indicated by LAND ASAP).

Then, after the immediate actions, if the smoke source cannot immediately identified and isolated, the diversion must be initiated before entering the SMOKE ORIGIN IDENTIFICATION AND FIGHTING part of the procedure.

IMMEDIATE ACTIONS

These actions are common to all cases of smoke and fumes, whatever the source.

Their objectives are:

- avoiding any further contamination of the cockpit/cabin,
- communication with cabin crew
- flight crew protection.

SMOKE ORIGIN IDENTIFICATION AND FIGHTING

The crew tries to identify the smoke source by isolating systems. Some guidelines may help the crew to identify the origin of smoke:

- If smoke initially comes out of the cockpit's ventilation outlets, or if smoke is detected in the cabin, the crew may suspect an AIR COND SMOKE. In addition, very shortly thereafter, several SMOKE warnings (cargo, lavatory, avionics) will be triggered. The displayed ECAM procedures must therefore be applied.
- Following an identified ENG or APU failure, smoke may emanate from the faulty item through the bleed system and be perceptible in the cockpit or the cabin. In that case, it will be re-circulated throughout the aircraft, until it completely disappears from the air conditioning system.
- If only the AVIONICS SMOKE warning is triggered, the crew may suspect an AVIONICS SMOKE.
- If smoke is detected, while an equipment is declared faulty, the crew may suspect that smoke is coming from this equipment.

According to the source he suspects, the crew will enter one of the 3 paragraphs:

1. IF AIR COND SMOKE SUSPECTED...
2. IF CAB EQUIPMENT SMOKE SUSPECTED...
3. IF AVNCS/COCKPIT SMOKE SUSPECTED...

Since electrical fire is the most critical case, he will also enter paragraph 3 if he doesn't know the source of the smoke, or if the application of paragraph 1 and/or 2 has been unsuccessful.

In this part of the procedure, the flight crew must consider setting the Emergency Electrical Configuration, to shed as much equipment as possible. This is in order to

attempt to isolate the smoke source.

If at least one battery is charging when one side and then the other side of the electrical system are shed, the DC1, DC2, and BAT bus bars become inoperative for the remainder of the flight. Therefore, the procedure for attempting to partially shed the electrical system was removed from the smoke procedure. This change in the procedure is to enable the flight crew to recover the normal electrical configuration for landing, particularly to recover normal braking.

BOXED ITEMS

These items (applying SMOKE REMOVAL procedure, setting electrical emergency configuration, or considering immediate landing) may be applied at any time, in the procedure (but not before the immediate actions).

Once the first step of the smoke removal procedure have been applied, the flight crew will come back to the SMOKE/FUMES/AVNCS SMOKE procedure, to apply the appropriate steps, depending on the suspected smoke source while descending to FL 100. Reaching FL 100, the smoke removal procedure will be completed.

CARGO SMOKE

Ident.: AO-026-00005678.0001001 / 26 MAR 08

Applicable to: ALL

The crew should be aware that, even after successful operation of the cargo fire bottle, the CARGO SMOKE warning might persist due to the smoke detectors being sensitive to the extinguishing agent.

On the ground, the crew should instruct the ground crew not to open the cargo door until the passengers have disembarked and fire services are present.

If SMOKE warning is displayed on ground with the cargo compartment door open, do not initiate an AGENT DISCHARGE. Request the ground crew to investigate and eliminate the smoke source. On ground, the warning may be triggered due to a high level of humidity.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

ABNORMAL OPERATIONS

FIRE PROTECTION

Intentionally left blank

ABNORMAL FLAPS/SLATS CONFIGURATION

Ident.: AO-027-00005681.0001001 / 22 MAY 08

Applicable to: ALL

CAUSES

Abnormal operation of the flaps and/or slats may be due to one of the following problems:

- Double SFCC failure
- Double hydraulic failure (B+G or Y+G)
- Flaps/Slats jammed (operation of the WTB)

CONSEQUENCES

Abnormal operation of the flaps and slats has significant consequences since:

- The control laws may change
- The selected speed must be used
- A stabilized approach should be preferred
- The approach attitudes change
- Approach speeds and landing distances increase
- The go-around procedure may have to be modified.

Note: *The FMS predictions do not take into account the slat or flap failures. Since fuel consumption is increased, these predictions are not valid.*

FAILURE AT TAKEOFF

Should a flap/slat retraction problem occur at takeoff, the crew will PULL the speed knob for selected speed to stop the acceleration and avoid exceeding VFE. The overspeed warning is computed according to the actual slats/flaps position. The landing distance available at the departure airport and the aircraft gross weight will determine the crew's next course of action.

FAILURE DURING THE APPROACH

The detection of a slat or flap failure occurs with the selection of flap lever during the approach. With A/THR operative, the managed speed target will become the next manoeuvring characteristic speed e.g. S speed when selecting flap lever to 1. At this stage, if a slat or flap failure occurs, the crew will:

- Pull the speed knob for selected speed to avoid further deceleration
- Delay the approach to complete the ECAM procedure
- Refer to LANDING WITH FLAPS OR SLATS JAMMED paper check list.

- Update the approach briefing

In the QRH, the line, "SPEED SEL.....VFE NEXT -5 kt" is designed to allow the crew to configure the aircraft for landing whilst controlling the speed in a safe manner. This procedure may involve reducing speed below the manoeuvring speed for the current configuration which is acceptable provided the speed is kept above VLS. The speed reduction and configuration changes should preferably be carried out wings level.

The landing distance factors and approach speed increments are available in the QRH. (*Refer to AO-010 LANDING DISTANCE PROCEDURE*)

Assuming VLS is displayed on the PFD, VAPP should be close to VLS + wind correction, since this speed is computed on the actual slat/flap position.

The AP may be used down to 500 ft AGL. As the AP is not tuned for the abnormal configurations, its behaviour can be less than optimum and must be monitored.

During the approach briefing, emphasis should be made of:

- Tail strike awareness
- The go-around configuration
- Any deviation from standard call out
- The speeds to be flown, following a missed approach
- At the acceleration altitude, selected speed must be used to control the acceleration to the required speed for the configuration.

Consider the fuel available and the increased consumption associated with a diversion when flying with flaps and/or slats jammed. Additionally, when diverting with flaps/slats extended, cruise altitude is limited to 20 000 ft.

FUEL LEAK

Ident.: AO-028-00005682.0001001 / 22 MAY 08

Applicable to: ALL

Significant fuel leaks although rare, are sometimes difficult to detect. Fuel check will be carried out by

- Checking that the remaining fuel added to the burnt fuel corresponds to the fuel on board at the gate.
- Maintaining the fuel log and comparing fuel on board to expected flight plan fuel would alert the crew to any discrepancy.

Fuel checks should be carried out when sequencing a waypoint and at least every 30 min. Any discrepancy should alert the crew and investigation should be carried out without delay.

Should an engine failure occur, the ECAM requires the opening of the fuel X feed to avoid fuel imbalance. In case of supposed or obvious engine damages, the opening of the fuel X feed will be performed only after being certain that there is no fuel leak.

Any time an unexpected fuel quantity indication, ECAM fuel message or imbalance is noted, a fuel leak should be considered as a possible cause. Initial indications should be carefully cross-checked by reference to other means, including if possible, a visual inspection.

If a leak is suspected, the crew should action the "FUEL LEAK" abnormal checklist available in QRH:

- If the leak is positively identified as coming from the engine, the affected engine is shut down to isolate the fuel leak and fuel cross-feed valve may be used as required.
- If the leak is not from the engine or cannot be located, it is imperative that the cross-feed valve is not opened.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

ABNORMAL OPERATIONS

FUEL

Intentionally left blank

HYDRAULIC GENERATION PARTICULARITIES

Ident.: AO-029-00005683.0001001 / 26 MAR 08

Applicable to: ALL

PREFACE

The aircraft has three continuously operating hydraulic systems: green, blue and yellow. A bidirectional Power Transfer Unit (PTU) enables the yellow system to pressurize the green system and vice versa. Hydraulic fluid cannot be transferred from one system to another.

PTU PRINCIPLE

In flight, the PTU operates automatically if differential pressure between green and yellow systems exceeds 500 PSI. This allows to cover the loss of one engine or one engine driven pump cases.

USE OF PTU IN CASE OF FAILURE

In case of reservoir low level, reservoir overheat, reservoir low air pressure, the PTU must be switched OFF as required by ECAM to avoid a PTU overheat which may occur two minutes later. Indeed, a PTU overheat may lead to the loss of the second hydraulic circuit.

RECOMMENDATIONS

When required by the ECAM, the PTU should be switched off without significant delay in case of:

- HYD G(Y) RSVR LO LVL
- HYD G(Y) RSVR LO PR
- HYD G(Y) RSVR OVHT

However, if PTU has been switched off because of HYD G(Y) RSVR OVHT and the alert disappears, affected pump may be restored and PTU switched back to AUTO.

DUAL HYDRAULIC FAILURES

Ident.: AO-029-00005684.0001001 / 26 MAR 08

Applicable to: ALL

PREFACE

Single hydraulic failures have very little effect on the handling of the aircraft but will cause a degradation of the landing capability to CAT 3 Single.

Dual hydraulic failures however, although unlikely, are significant due to the following

consequences:

- Loss of AP
- Flight control law degradation (ALTN)
- Landing in abnormal configuration
- Extensive ECAM procedures with associated workload and task-sharing considerations
- Significant considerations for approach and landing.

GENERAL GUIDELINES

It is important to note that the AP will not be available to the crew but both FD and A/THR still remain. Additionally, depending on the affected hydraulic circuits, aircraft handling characteristics may be different due to the loss of some control surfaces. The PF will maneuver with care to avoid high hydraulic demand on the remaining systems. The PF will be very busy flying the aircraft and handling the communications with the flight controls in Alternate Law.

A double hydraulic failure is an emergency situation, with red LAND ASAP displayed, and a MAYDAY should be declared to ATC. A landing must be carried out as soon as possible bearing in mind, however, that the ECAM actions should be completed prior to the approach.

PF will then require the ECAM actions. A clear reading of STATUS is essential to assess the aircraft status and properly sequence actions during the approach.


This failure is called a "complex procedure" and the QRH summary should be referred to upon completion of the ECAM procedure. *Refer to OP-040 USE OF SUMMARIES*

While there is no need to remember the following details, an understanding of the structure of the hydraulic and flight control systems would be an advantage. The F/CTL SD page and the OPS DATA section of the QRH provide an overview of the flight controls affected by the loss of hydraulic systems.

The briefing will concentrate on safety issues since this will be a hand-flown approach with certain handling restrictions:

- Use of the selected speeds on the FCU.
- Landing gear gravity extension
- Approach configuration and flap lever position
- Approach speed VAPP
- Tail strike awareness
- Braking and steering considerations
- Go around call out, aircraft configuration and speed

The STATUS page requires, in each case, a landing gear gravity extension. The LANDING GEAR GRAVITY EXTENSION procedure will be completed with reference

 AIRBUS A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS HYDRAULIC
---	--

to the QRH.

A stabilized approach will be preferred.

REMAINING SYSTEMS
Ident.: AO-029-00005685.0001001 / 26 MAR 08 Applicable to: ALL


Flight phase	Systems	Remaining systems		
		HYD G+B SYS LO PR	HYD G+Y SYS LO PR	HYD B+Y SYS LO PR
Cruise	Auto pilot	Inop	Inop	Inop
	Yaw damper	YD2 only	Inop	YD1 only
	Control law	ALTN LAW and DIRECT LAW when L/G DN	ALTN LAW and DIRECT LAW when L/G DN	NORM LAW
	Stabilizer	Avail	Inop See (1)	Avail
	Spoilers	2 SPLRS/wing	1 SPLR/wing	2 SPLRS/wing
	Elevator	R ELEV only	Avail	L ELEV only
	Aileron	Inop	Avail	Avail
Landing	Slats/Flaps	FLAPS slow only	SLATS slow Only See (2)	SLATS/FLAPS slow only
	L/G extension	Gravity	Gravity	Gravity
	Braking	ALTN BRK only	Y ACCU PRESS only	NORM BRK only
	Anti skid	Avail	Inop	Avail
	Nose wheel steering	Inop	Inop	Inop
	Reverse	REV 2 only	Inop	REV 1 only
Go/around	L/G retraction	Inop	Inop	Inop

SYSTEMS PARTICULARITIES

1. The stabilizer is lost. In alternate law, the auto trim function is provided through the elevators. At landing gear extension, switching to direct law, the auto trim function is lost. However, the mean elevator position at that time is memorized, and becomes the reference for centered sidestick position. This is why, in order to ensure proper centered sidestick position for approach and landing, the procedure requires to wait for stabilization at VAPP, before landing gear extension.

If this procedure is missed, the flare and pitch control in case of go-around may be difficult.

The PFD message USE MAN PITCH TRIM after landing gear extension should thus be disregarded.

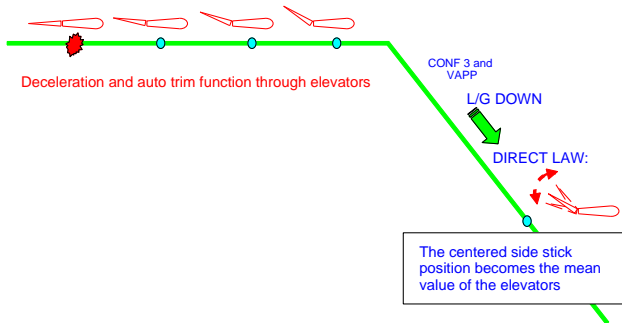

2. High pitch during approach should be expected. Approach briefing should outline it for tail strike awareness and pitch attitude will be monitored during flare.

LDG WITH ABNORMAL L/G

Ident.: AO-032-00005686.0001001 / 22 MAY 08

Applicable to: ALL

This situation might occur following completion of a L/G GEAR NOT DOWNLOCKED procedure. It is always better to land with any available gear rather than carry out a landing without any gear.

In all cases, weight should be reduced as much as possible to provide the slowest possible touchdown speed. Although foaming of the runway is not a requirement, full advantage should be taken of any ATC offer to do so.

The passengers and cabin crew should be informed of the situation in good time. This will allow the cabin crew to prepare the cabin and perform their emergency landing and evacuation procedures.

If one or both main landing gears in abnormal position, the ground spoilers will not be armed to keep as much roll authority as possible for maintaining the wings level. Ground spoiler extension would prevent spoilers from acting as roll surfaces.

The crew will not arm the autobrake as manual braking will enable better pitch and roll control. Furthermore, with at least one main landing gear in the abnormal position, the autobrake cannot be activated (ground spoilers not armed).

With one main landing gear not extended, the reference speed used by the anti-skid system is not correctly initialized. Consequently, the anti-skid must be switched off to prevent permanent brake release.

In all cases, a normal approach should be flown and control surfaces used as required to maintain the aircraft in a normal attitude for as long as possible after touchdown. The engines should be shut down early enough to ensure that fuel is cut off prior to nacelle touchdown, but late enough to keep sufficient authority on control surfaces in order to:

- Maintain runway axis
- Prevent nacelle contact on first touch down
- Maintain wing level and pitch attitude as long as possible.

Considering a realistic hydraulic demand, the hydraulic power remains available up to approximately 30 s after the shut down of the related engine. It is the reason why the recommendations to switch the ENG masters OFF are as follow:

- If NOSE L/G abnormal
Before nose impact
- If one MAIN L/G abnormal
At touch down.
- If both MAIN L/G abnormal
In the flare, before touch down

The reversers will not be used to prevent the ground spoilers extension and because the



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

ABNORMAL OPERATIONS

LANDING GEAR

engine will touch the ground during roll out.

The engines and APU fire pbs are pushed when the use of flight controls is no longer required i.e. when aircraft has stopped.

NOSE WHEEL STEERING FAULT

Ident.: AO-032-00006423.0001001 / 02 JUL 08

Applicable to: ALL

If the Nose Wheel Steering (NWS) is lost for taxiing, the flight crew can steer the aircraft with differential braking technique. If the flight crew does not have experience with this technique, he should preferably request a towing to return to the gate. The flight crew can request the towing early in approach, if the failure has been triggered in flight.

ADR/IRS FAULT

Ident.: AO-034-00005687.0001001 / 26 MAR 08

Applicable to: ALL

Each ADIRS has two parts (ADR and IRS), that may fail independently of each other. Additionally the IRS part may fail totally or may be available in ATT mode.

Single NAV ADR FAULT or NAV IRS FAULT are simple procedures, and only require action on the switching panel as indicated by the ECAM.

Dual NAV ADR or NAV IRS failures will cause the loss of AP, A/THR and flight controls revert to ALTN LAW.

Due to the low probability of a triple ADR failure, the associated procedure will not be displayed on the ECAM. In this case, the crew will refer to QRH procedure for ADR 1 + 2 + 3 failure.

There is no procedure for IRS 1 + 2 + 3 failure but the ECAM status page will give approach procedure and inoperative systems. In this unlikely event, the standby instruments are the only attitude, altitude, speed and heading references.

Note: To switch off an ADR, the flight crew must use the ADR pushbutton. Do not use the rotary selector, because this would also cut off the electrical supply to the IR part.

UNRELIABLE AIRSPEED INDICATIONS

Ident.: AO-034-00005688.0001001 / 22 MAY 08

Applicable to: ALL

PREFACE

Most failures modes of the airspeed/altitude system are detected by the ADIRS. These failures modes lead to the loss of corresponding cockpit indications and the triggering of associated ECAM drills.

However, there may be some cases where the airspeed or altitude output is erroneous without being recognized as such by the ADIRS. In these cases, the cockpit indications appear normal but are actually false and pilots must rely on their basic flying skills to identify the faulty source and take the required corrective actions. When only one source provides erroneous data, a straightforward crosscheck of the parameters provided by the three ADRs allows the faulty ADR to be identified. This identification becomes more difficult in the extreme situation when two, or even all of three, sources provide erroneous information.

MAIN REASONS FOR ERRONEOUS AIRSPEED/ALTITUDE DATA

The most probable reason for erroneous airspeed and altitude information is obstructed pitot tubes or static sources. Depending on the level of obstruction, the symptoms visible to the flight crew will be different. However, in all cases, the data provided by the obstructed probe will be false. Since it is highly unlikely that the aircraft probes will be obstructed at the same time, to the same degree and in the same way, the first indication of erroneous airspeed/altitude data available to flight crews, will most probably be a discrepancy between the various sources.

CONSEQUENCES OF OBSTRUCTED PITOT TUBES OR STATIC PORTS

All aircraft systems, using anemometric data, have been built-in fault accommodation logics. The fault accommodation logics are not the same for various systems but, all rely on voting principle whereby when one source diverges from the average value, it is automatically rejected and the system continues to operate normally with the remaining two sources. This principle applies to flight controls and flight guidance systems.

NORMAL SITUATION

Each ELAC receives speed information from all ADIRUs and compares the 3 values. Pressure altitude information is not used by the ELAC.

Each FAC (Flight Augmentation Computer) receives speed information from all ADIRUs and compares the 3 values.

ONE ADR OUTPUT IS ERRONEOUS AND THE TWO REMAINING ARE CORRECT


The ELAC and the FAC and/or FMGC eliminate it without any cockpit effect (no caution, normal operation is continued), except that one display is wrong and CAT III DUAL is displayed as INOP SYS on STATUS page.

TWO ADR OUTPUTS ARE ERRONEOUS, BUT DIFFERENT, AND THE REMAINING ADR IS CORRECT, OR IF ALL THREE ARE ERRONEOUS, BUT DIFFERENT :

The autopilot and the auto thrust are disconnected (whichever autopilot is engaged). The ELAC triggers the F/CTL ADR DISAGREE ECAM caution. Flight controls revert to Alternate law (without high and low speed protection). On both PFDs, the "SPD LIM" flag is shown; no VLS, no VSW and no VMAX is displayed.

This situation is latched, until an ELAC reset is performed on ground, without any hydraulic pressure.

However, if the anomaly was only transient, the autopilot and the autothrust can be re-engaged when the disagree has disappeared.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS NAVIGATION
---	---

ONE ADR IS CORRECT, BUT THE OTHER TWO ADRS PROVIDE THE SAME ERRONEOUS OUTPUT, OR IF ALL THREE ADRS PROVIDE CONSISTENT AND ERRONEOUS DATA :

The systems will reject the "good" ADR and will continue to operate normally using the two "bad" ADRs. This condition can be met when, for example, two or all three pitot tubes are obstructed at the same time, to the same degree, and in the same way. (Flight through a cloud of volcanic ash, takeoff with two pitots obstructed by foreign matter (mud, insects)).

The following chart provides a non-exhaustive list of the consequences of various cases of partially or totally obstructed pitot tubes and static ports on airspeed and altitude indications. It should be noted that the cases described below cover extreme situations (e.g. totally obstructed or unobstructed drain holes), and that there could be multiple intermediate configurations with similar, but not identical, consequences.

FAILURE CASE	CONSEQUENCES
Water accumulated due to heavy rain. Drain holes unobstructed.	Transient speed drop until water drains. IAS fluctuations. IAS step drop and gradual return to normal.
Water accumulated due to heavy rain. Drain holes obstructed.	Permanent speed drop.
Ice accretion due to pitot heat failure, or transient pitot blocked due to severe icing. Unobstructed drain holes.	Total pressure leaks towards static pressure. IAS drop until obstruction cleared/fluctuation, if transient erratic A/THR is transient.
Ice accretion due to pitot heat failure, or pitot obstruction due to foreign objects. Obstructed drain holes.	Total pressure blocked. Constant IAS in level flight, until obstruction is cleared. In climb, IAS increases. In descent, IAS decreases. Abnormal AP/FD/ATHR behavior : a. AP/FD pitch up in OPN CLB to hold target IAS. b. AP/FD pitch down in OPN DES to hold target IAS
Total obstruction of static ports on ground.	Static pressure blocked at airfield level. Normal indications during T/O roll. After lift-off altitude remains constant. IAS decreases, after lift-off. IAS decreases, when aircraft climbs. IAS increases, when aircraft descends.

The above table clearly illustrates that no single rule can be given to conclusively identify all possible erroneous airspeed/altitude indications cases.

ADR CHECK PROC / UNRELIABLE SPEED INDICATION QRH PROCEDURE

Ident.: AO-034-00005690.0001001 / 30 JUN 08

Applicable to: ALL

INTRODUCTION

The UNRELIABLE SPEED INDICATIONS / ADR CHECK PROC procedure has two objectives: to identify and isolate the affected ADR (s), and, if not successful, to fly the aircraft until landing without any speed reference.

It includes the following steps:

1. Memory items
2. Trouble shooting and isolation
3. Flight using Pitch/thrust references.

WHEN TO APPLY THIS PROCEDURE?

The flight crew may enter this procedure, either upon ECAM request (ADR DISAGREE or ANTI-ICE PITOT caution), or because he suspects an erroneous indication, without any ECAM warning.

Erroneous speed/altitude indication can be suspected by:

1. Speed discrepancy (between ADR1, 2, 3, and standby indication)
2. Fluctuating or unexpected increase/decrease/permanent indicated speed, or pressure altitude.
3. Abnormal correlation of basic flight parameters (IAS, pitch, attitude, thrust, climb rate) :
 - IAS increasing, with large nose-up pitch attitude
 - IAS decreasing, with large nose down pitch attitude
 - IAS decreasing, with nose down pitch attitude and aircraft descending
4. Abnormal AP/FD/ATHR behavior
5. STALL warning, or OVERSPEED warnings, or a Flap RELIEF ECAM message, that contradicts with at least one of the indicated speeds.
 - Rely on the stall warning that could be triggered in alternate or direct law. It is not affected by unreliable speeds, because it is based on angle of attack.
 - Depending on the failure, the OVERSPEED warning may be false or justified. Buffet, associated with the OVERSPEED VFE warning, is a symptom of a real overspeed condition.
6. Inconsistency between radio altitude and pressure altitude.
7. Reduction in aerodynamic noise with increasing speed, or increase in aerodynamic noise with decreasing speed.
8. Impossibility of extending the landing gear by the normal landing gear system.

HOW TO APPLY THIS PROCEDURE?

ANY DOUBT ABOUT SPEED INDICATION, or relevant ECAM WARNING

- If safe conduct of the flight affected: **MEMORY ITEMS**
- If safe conduct of the flight NOT affected: **TROUBLE SHOOTING (with or without level flight)**

Because the displayed information may be erroneous, the flying accuracy cannot be assumed. Incorrect transponder altitude reporting could cause confusion. Therefore, this is an emergency situation which requires to land as soon as possible, and a MAYDAY should be declared to advise ATC and other aircraft of the situation.

PART 1: MEMORY ITEMS

If the safe conduct of the flight is affected, the flight crew applies the memory items. They allow "safe flight conditions" to be rapidly established in all flight phases (takeoff, climb, cruise) and aircraft configurations (weight and slats/flaps). The memory items apply more particularly when a failure appears just after takeoff.

Once the target pitch attitude and thrust values have been stabilized, as soon as above safe altitude, the flight crew will enter the QRH abnormal procedures, to level off the aircraft and perform trouble shooting. This should not be delayed, since using the memory item parameters for a prolonged period may lead to speed limit exceedance.

PART 2: TROUBLE SHOOTING AND ISOLATION

GENERAL

If the wrong speed or altitude information does not affect the safe conduct of the flight, the crew will not apply the memory items, and will directly enter the QRH abnormal procedures.

Depending of the cause of the failure, the altitude indication may also be unreliable. There are however, a number of correct indications available to the crew. GPS altitude and ground speed are available on MCDU GPS monitor page and RA may be used at low altitude.

For affected ADR (s) identification, the flight crew may, either level off and stabilize the flight using the dedicated table in PART 2, or, if for instance already stabilized in climb, use the CLIMB table given in part 3. The trouble shooting will be more accurate, using the level off table.

LEVEL OFF AND STABILIZATION (IF REQUIRED)

The table gives the proper pitch and thrust values for stabilization in level off according to weight, configuration and altitude.

It must be noticed that, if the altitude information is unreliable, FPV and V/S are also affected. In this case, the GPS altitude, if available, is the only means to confirm when the aircraft is maintaining a level. When reliable, the FPV should be used.

If the memory items have been maintained for a significant period of time, the current speed may be quite above the target.

- **If FPV is reliable, or if GPS altitude information is available:**
 - Maintain level flight (FPV on the horizon or constant GPS altitude)
 - Adjust thrust according to the table
 - Observe the resulting pitch attitude, and compare it with the recommended table pitch target.
 - If the aircraft pitch to maintain level flight is above the table pitch target, the aircraft is slow, then increase thrust
 - If the aircraft pitch to maintain level flight is below the table pitch target, the aircraft is fast, then decrease thrust

When the pitch required to maintain level off gets close to the table pitch target,

re-adjust thrust according to table thrust target.

This technique permits to stabilize the speed quickly, without inducing altitude changes.

- If FPV is not reliable and GPS altitude information is not available (no means to ensure level flight):
Adjust pitch and thrust according to table, and wait for speed stabilization.




A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

ABNORMAL OPERATIONS

NAVIGATION

If final descent is started with stabilized speed (VAPP), flying a -3° flight path with the recommended table thrust, the resulting pitch attitude should be close to the

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS POWER PLANT
---	--

ALL ENGINE FLAMEOUT

Ident.: AO-070-00005691.0001001 / 22 MAY 08

Applicable to: ALL

Following an all engine flame out, the flight deck indications change dramatically as the generators drop off line. The RAT is deployed to supply the emergency generator and pressurize the blue hydraulic circuit.

Control of the aircraft must be taken immediately by the left hand seat pilot, and a safe flight path established.

When convenient, an emergency will be declared to ATC using VHF1. Depending on the exact situation, assistance may be available from ATC regarding position of other aircraft, safe direction etc.

Significant remaining systems in ALL ENGINES FLAME OUT	
FLY	PFD1, Alternate law
NAVIGATE	RMP1, VOR1
COMMUNICATE	VHF1/HF1/ATC1

Note: The AP and pitch trim are not available. Rudder trim is recoverable.

If engine wind milling is sufficient, additional hydraulic power may be recovered. The ECAM actions are displayed and allow coping with this situation. However, as the ECAM cannot distinguish whether fuel is available or not, they provide a dimensioning procedure which cover all cases. Furthermore, The ECAM procedure refers to paper QRH for OPERATING SPEEDS, L/G GRAVITY EXTENSION and DITCHING or FORCED LANDING.


It is the reason why the ENG DUAL FAILURE- FUEL REMAINING or ENG DUAL FAILURE - NO FUEL REMAINING procedures are available in the QRH. As they distinguish whether fuel is available or not, these single paper procedures are optimized for each case and include the required paper procedure until landing, including FORCED LANDING and DITCHING. Consequently, the crew should apply the QRH procedure and then, if time permits, clear ECAM warning to read status.

In the fuel remaining case,

- The actions should be commenced, with attention to the optimum relight speed without starter assist (with wind milling). If there is no relight within 30 s, the ECAM will order engine masters off for 30 s. This is to permit ventilation of the combustion chamber. Then, the engine masters may be set ON again. Without starter assist (wind milling), this can be done at the same time.
- If the crew wants to take credit of the APU bleed air, the APU should be started below FL 250. Below FL 200, an engine relight should be attempted with starter assist (using the APU bleed).

- Green dot, which corresponds to the optimum relight speed with starter assist, is displayed on the left PFD. With starter assist (APU bleed), only one engine must be started at a time.

All engine flame out procedure

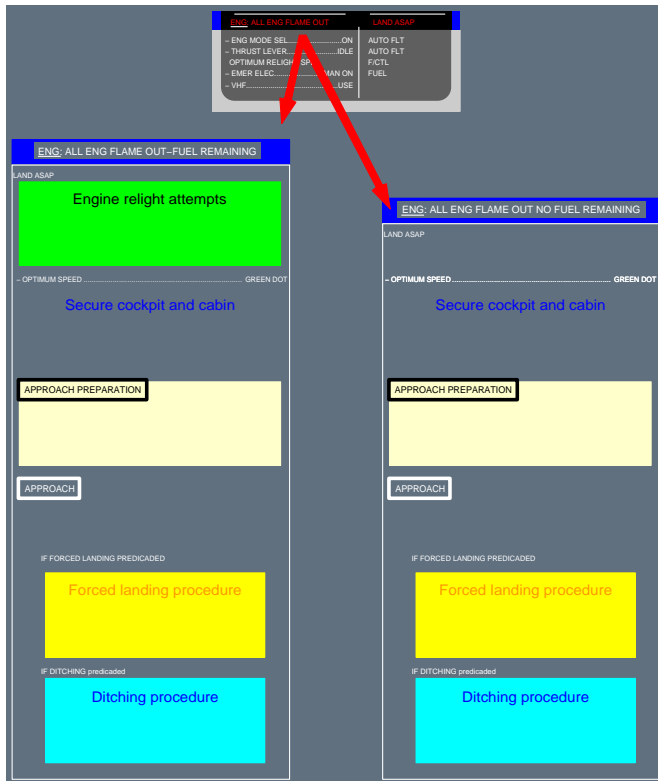

EMERGENCY DESCENT

Ident.: AO-090-00005694.0001001 / 21 APR 08

Applicable to: ALL


The emergency descent should only be initiated upon positive confirmation that cabin altitude and rate of climb is excessive and uncontrollable. This procedure should be carried out by the crew from memory. The use of AP and auto thrust is strongly recommended for an emergency descent. The FCU selections for an emergency descent progress from right to left, i.e. ALT, HDG, SPD.

At high flight levels, the speed brake should be extended slowly while monitoring VLS to avoid the activation of angle of attack protection. This would cause the speed brakes to retract and may also result in AP disconnection. If structural damage is suspected, caution must be used when using speed brakes to avoid further airframe stress. When the aircraft is established in the descent, the PF should request the ECAM actions if any or QRH.

The passenger oxygen MASK MAN ON pb should be pressed only when it is clear that cabin altitude will exceed 14 000 ft.

When in idle thrust, high speed and speed brake extended, the rate of descent is approximately 7 000 ft/min. To descend from FL 390 to FL 100, it takes approximately 4 min and 40 nm. The crew will be aware that MORA displayed on ND (if available) is the highest MORA within a 80 nm circle round the aircraft.

After taking off the emergency mask following an emergency descent, the crew should close the mask box and reset the control slide in order to deactivate the mask microphone.

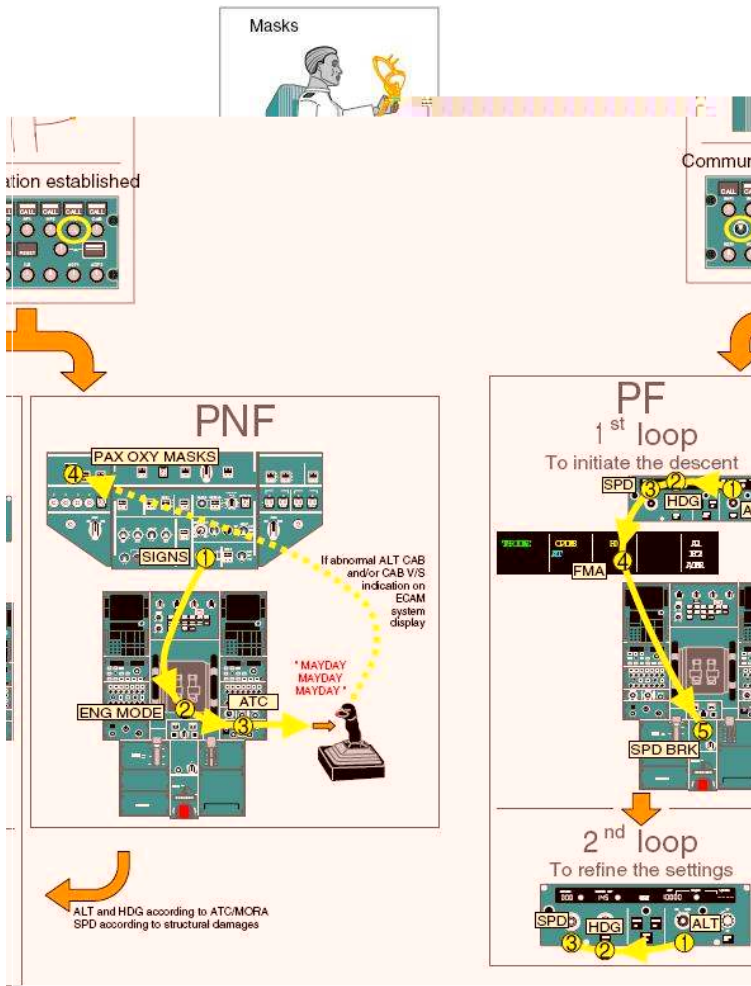

OVERWEIGHT LANDING

Ident.: AO-090-00005692.0037001 / 24 JUN 08

Applicable to: MSN 0781-0852, 1720

Should an overweight landing be required, a long straight in approach, or a wide visual pattern, should be flown in order to configure the aircraft for a stabilized approach. At very high weights, VFE CONF1 is close to VLS clean. To select CONF 1, deselect A/THR, decelerate to (or slightly below) VLS and select CONF 1 when below VFE. When established at CONF 1, the crew can reengage A/THR and use managed speed again.

The stabilized approach technique should be used, and VAPP established at the FAF. The speed will be reduced to reach VLS at runway threshold, to minimize the aircraft energy.

The crew will elect the landing configuration according to the "maximum weight for go-around in CONF 3" table provided both in QRH and in FCOM:

- If aircraft weight is below the maximum weight for go-around in CONF 3, landing will be performed CONF full (and go-around CONF 3) as it is the preferred configuration for optimized landing performance
- If aircraft weight is above the maximum weight for go-around in CONF 3, landing will be performed CONF 3 (and go-around CONF 1+F). The CONF 1+F meets the approach climb gradient requirement in all cases (high weights, high altitude and temperature).

If a go-around CONF 1+F is carried out following an approach CONF 3, VLS CONF 1+F may be higher than VLS CONF 3 +5 kt. The recommendation in such a case is to follow SRS orders which will accelerate the aircraft up to the displayed VLS. It should be noted, however, that VLS CONF 1+F equates to 1.23 VS1G whereas the minimum go-around speed required by regulations is 1.13 VS1G. This requirement is always satisfied. The crew should be aware that the transition from -3 ° flight path angle to go around climb gradient requires a lot of energy and therefore some altitude loss.

Taking into account the runway landing distance available, the use of brakes should be modulated to avoid very hot brakes and the risk of tire deflation.

When the aircraft weight exceeds the maximum landing weight, structural considerations impose the ability to touch down at 360 ft/min without damage. This means that no maintenance inspection is required if vertical speed is below 360 ft/min. If vertical speed exceeds 360 ft/min at touch down, a maintenance inspection is required.



OVERWEIGHT LANDING

Ident.: AO-090-00005692.0038001 / 24 JUN 08

Applicable to: MSN 1320-1637, 1777-2180

Should an overweight landing be required, a long straight in approach, or a wide visual pattern, should be flown in order to configure the aircraft for a stabilized approach. The stabilized approach technique should be used, and VAPP established at the FAF. The speed will be reduced to reach VLS at runway threshold, to minimize the aircraft energy.

The crew will elect the landing configuration according to the "maximum weight for go-around in CONF 3" table provided both in QRH and in FCOM:

- If aircraft weight is below the maximum weight for go-around in CONF 3, landing will be performed CONF full (and go-around CONF 3) as it is the preferred configuration for optimized landing performance
- If aircraft weight is above the maximum weight for go-around in CONF 3, landing will be performed CONF 3 (and go-around CONF 1+F). The CONF 1+F meets the approach climb gradient requirement in all cases (high weights, high altitude and temperature).

If a go-around CONF 1+F is carried out following an approach CONF 3, VLS CONF 1+F may be higher than VLS CONF 3 +5 kt. The recommendation in such a case is to follow SRS orders which will accelerate the aircraft up to the displayed VLS. It should be noted, however, that VLS CONF 1+F equates to 1.23 VS1G whereas the minimum go-around speed required by regulations is 1.13 VS1G. This requirement is always satisfied. The crew should be aware that the transition from -3 ° flight path angle to go around climb gradient requires a lot of energy and therefore some altitude loss.

Taking into account the runway landing distance available, the use of brakes should be modulated to avoid very hot brakes and the risk of tire deflation.

When the aircraft weight exceeds the maximum landing weight, structural considerations impose the ability to touch down at 360 ft/min without damage. This means that no maintenance inspection is required if vertical speed is below 360 ft/min. If vertical speed exceeds 360 ft/min at touch down, a maintenance inspection is required.


CREW INCAPACITATION

Ident.: AO-090-00005696.0001001 / 22 MAY 08

Applicable to: ALL

GENERAL

Crew incapacitation is a real safety hazard which occurs more frequently than many of the other emergencies. Incapacitation can occur in many form varying from obvious

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	ABNORMAL OPERATIONS MISCELLANEOUS
---	--

sudden death to subtle, partial loss of function. It may not be preceded by any warning.

RECOGNITION

The keys to early recognition of the incapacitation are

- Routine monitoring and cross checking of flight instruments
- Crew members should have a very high index of suspicion of a subtle incapacitation
- If one crew member does not feel well, the other crew must be advised
- Others symptoms e.g. incoherent speech, pale fixed facial expression or irregular breathing could indicate the beginning of an incapacitation.

ACTION

The recovery from a detected incapacitation of the fit pilot shall follow the sequence below:

First phase

- Assume control, return the aircraft to a safe flight path, announce "I have control", use the take-over pb and engage the on side AP as required.
- Declare an emergency to ATC
- Take whatever steps are possible to ensure the incapacitated pilot cannot interfere with the handling of the aircraft. This may include involving cabin crew to restrain the incapacitated pilot
- Request assistance from any medically qualified passenger
- Check if a type qualified company pilot is on board to replace the incapacitated crew member
- Land as soon as practicable after considering all pertinent factors
- Arrange medical assistance after landing giving many details about the condition of the affected crewmember

Second phase

- Prepare the approach and read the checklist earlier than usual
- Request radar vectoring and prefer a long approach to reduce workload
- Perform the landing from the fit pilot usual seat.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL


ABNORMAL OPERATIONS

MISCELLANEOUS

Intentionally left blank

SUPPLEMENTARY INFORMATION

Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	SUPPLEMENTARY INFORMATION PRELIMINARY PAGES TABLE OF CONTENTS
---	--

SI-PLP. PRELIMINARY PAGES

TABLE OF CONTENTS	1/2
-------------------------	-----

SI-010. ADVERSE WEATHER

GENERAL	1/16
COLD WEATHER OPERATIONS AND ICING CONDITIONS	1/16
TURBULENCE	8/16
WINDSHEAR	10/16
VOLCANIC ASH	14/16

SI-020. FLYING REFERENCE

GENERAL	1/4
THE ATTITUDE	1/4
THE FLIGHT PATH VECTOR	1/4
GO-AROUND	4/4

SI-030. NAVIGATION ACCURACY

GENERAL	1/8
AIRCRAFT POSITION COMPUTATION	1/8
USE OF FMS	4/8
AIRCRAFT POSITION AWARENESS AND OPERATIONAL CONSEQUENCES	5/8

SI-040. ZFW - ZFCG ENTRY ERRORSZFW - ZFCG ENTRY ERRORS

GENERAL	1/4
TECHNICAL BACKGROUND	1/4
ZFW ENTRY ERROR AND OPERATIONAL CONSEQUENCES	2/4
OPERATIONAL RECOMMENDATIONS	3/4

SI-060. TCAS

TECHNICAL BACKGROUND	1/4
OPERATIONAL RECOMMENDATIONS	2/4

SI-070. USE OF RADAR

GENERAL	1/4
FUNCTIONS	1/4
OPERATIONAL RECOMMENDATIONS FOR WEATHER DETECTION	3/4
OTHER OPERATIONAL RECOMMENDATIONS	4/4



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

SUPPLEMENTARY INFORMATION

PRELIMINARY PAGES

TABLE OF CONTENTS

Intentionally left blank

GENERAL

Ident.: SI-010-00005700.0001001 / 26 MAR 08

Applicable to: ALL

The adverse weather operation take into account the following topics:

- Cold weather operations and icing conditions
- Turbulence
- Windshear
- Volcanic ashes

COLD WEATHER OPERATIONS AND ICING CONDITIONS

Ident.: SI-010-00005701.0001001 / 30 JUN 08

Applicable to: ALL

PREFACE

Aircraft performance is certified on the basis of a clean wing. Ice accretion affects wing performance. When the wing is clean, the airflow smoothly follows the shape of the wing. When the wing is covered with ice, the airflow separates from the wing when the Angle-Of-Attack (AOA) increases. Therefore, the maximum lift-coefficient is reduced. As a result, the aircraft may stall at a lower AOA, and the drag may increase.

The flight crew must keep in mind that the wing temperature of the aircraft may be significantly lower than 0 °C, after a flight at high altitude and low temperature, even if the Outside Air Temperature (OAT) is higher than 0 °C. In such cases, humidity or rain will cause ice accretion on the upper wing, and light frost under the wing. (Only 3 mm of frost on the under side of the wing tank area is acceptable.)

EXTERIOR INSPECTION

When icing conditions on ground are encountered, and/or when ice accretion is suspected, the Captain should determine, on the basis of the exterior inspection, whether the aircraft requires ground deicing/anti-icing treatment. This visual inspection must take into account all vital parts of the aircraft, and must be performed from locations that offer a clear view of these parts.

COCKPIT PREPARATION

The following systems may be affected in very cold weather:

- The EFIS/ECAM (when the cockpit temperature is very low)
- The IRS alignment (may take longer than usual, up to 15 min)

The probe and window heating may be used on ground. Heating automatically operates at low power.

AIRCRAFT GROUND DE-ICING/ANTI-ICING

DE-ICING/ANTI-ICING FLUID

Deicing/anti-icing fluids must be able to remove ice and to prevent its accumulation on aircraft surfaces until the beginning of the takeoff. In addition, the fluids must flow off the surfaces of the aircraft during takeoff, in order not to degrade takeoff performance.

Several types of fluids can be used. These fluids have different characteristics:

type 1	type 2, 3, 4
Low viscosity	High viscosity
Limited hold-over time	Longer hold-over time
Used mainly for de-icing	Used for de-icing and anti-icing

The holdover time starts from the beginning of the application of the fluid, and depends on the type of fluid, and on the nature and severity of precipitation. The flight crew should refer to applicable tables as guidelines. These tables must be used in conjunction with the pre-takeoff check.


Depending upon the severity of the weather, de-icing/anti-icing procedure must be applied either:

- In one step, via the single application of heated and diluted deicing/anti-icing fluid: This procedure provides a short holdover time, and should be used in low moisture conditions only. The holdover time starts from the beginning of the application of the fluid.
- In two steps, by first applying the heated deicing fluid, then by applying a protective anti-icing fluid: These two sprays must be applied consecutively. The holdover time starts from the beginning of the application of the second fluid.

PROCEDURES

The following outlines the various procedures to be applied before and after spraying:

- All ENG and APU BLEED pushbuttons must be set to OFF and the DITCHING pushbutton must be set to ON, to prevent any engine ingestion of deicing/anti-icing fluid.
- The aircraft can be deiced/anti-iced, with the engine and/or the APU running or off. However, the APU or the engine should not be started during spraying.
- The aircraft must be deiced/anti-iced symmetrically on both sides.
- Keep bleeds off after spraying for a few minutes.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	SUPPLEMENTARY INFORMATION ADVERSE WEATHER
---	--

- After spraying, keep bleeds off for a few minutes, and perform a visual inspection of the aircraft surfaces.
- A deicing/anti-icing report must be filled out to indicate the type of fluid and when the spraying began.

AFTER START

- Keep the engine bleeds off, with the engines running at higher N1.
- Keep the APU running with the bleed off for a few minutes after spraying.
- The slats/flaps and flight controls can be moved, because they no longer have ice.

TAXI OUT

On contaminated runways, the taxi speed should be limited to 10 kt, and any action that could distract the flight crew during taxiing should be delayed until the aircraft is stopped.

The following factors should be taken into account:

- At speeds below 10 kt, anti-skid de-activates.
- Engine anti-ice increases ground idle thrust.
- To minimize the risk of skidding during turns: Avoid large tiller inputs.
- On slippery taxiways: It may be more effective to use differential braking and/or thrust, instead of nosewheel steering.
- On slush-covered, or snow-covered, taxiways: Flap selection should be delayed until reaching the holding point, in order to avoid contaminating the flap/slat actuation mechanism.
- When reaching the holding point: The "Before Takeoff down to the line" checklist must be performed.
- The flight crew must maintain the aircraft at an appropriate distance from the aircraft in front.
- In icing conditions: When holding on ground for extended periods of time, or if engine vibration occurs, thrust should be increased periodically, and immediately before takeoff, to shed any ice from the fan blades.

For more details about this procedure, *Refer to FCOM/PRO-NOR-SOP-09-A AFTER START - ENG ANTI-ICE.*

TAKEOFF

TAKEOFF PERFORMANCES

The use of FLEX thrust for takeoff on contaminated runways is prohibited. If anti-ice is used at takeoff, the crew will apply the related performance penalty. Slush, standing water, or deep snow reduces the aircraft takeoff performance because of increased rolling resistance and the reduction in tire-to-ground friction. A

higher flap setting will increase the runway limited takeoff weight, but will reduce second segment limited takeoff weight.

TAKEOFF ROLL

Before the aircraft lines up on the runway for takeoff, the flight crew must ensure that the airframe has no ice or snow.

Then, before applying thrust, the Captain should ensure that the nosewheel is straight. If there is a tendency to deviate from the runway centerline, this tendency must be neutralized immediately, via rudder pedal steering, not via the tiller.

On contaminated runways, the flight crew should ensure that engine thrust advances symmetrically to help minimize potential problems with directional control.

MAXIMUM CROSS WIND

The following table provides the maximum crosswind that corresponds to the reported runway-friction coefficient:

Reported Braking Action	Reported Runway-Friction Coefficient	Equivalent Runway Condition	Maximum Crosswind (knots)
Good/Medium	0.39 to 0.36	1	29
Medium	0.35 to 0.3	2/3	25
Medium/Poor	0.29 to 0.26	2/3	20
Poor	≤0.25	3/4	15
Unreliable	-	4/5	5

The equivalent runway condition numbers, in the above table, correspond to the following runway conditions:


1. Dry, damp, or wet runway (less than 3 mm waterdepth)
2. Runway covered with slush
3. Runway covered with dry snow
4. Runway covered with standing water with risk of aquaplaning or wet snow
5. Icy runway or high risk of aquaplaning

CLIMB/ DESCENT

Whenever icing conditions are encountered or expected, the engine anti-ice should be turned on. Although the TAT before entering clouds may not require engine anti-ice, flight crews should be aware that the TAT often decreases significantly, when entering clouds.

In climb or cruise, when the SAT decreases to lower than -40 °C, engine anti-ice should be turned off, unless flying near CBs.

If the recommended anti-ice procedures are not performed, engine stall, over-

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	<p style="text-align: center;">SUPPLEMENTARY INFORMATION</p> <p style="text-align: center;">ADVERSE WEATHER</p>
---	---

temperature, or engine damage may occur,

If it is necessary to turn on the engine anti-ice, and if ice accretion is visible because engine anti-ice was turned on late, then apply the following procedure:

- Set the ENGINE START selector to IGN
- Retard one engine, and set the ENG ANTI-ICE pushbutton to ON
- Smoothly adjust thrust, and wait for stabilization
- Set the ENGINE START selector to NORM
- Repeat this procedure for the other engine

Wing anti-ice should be turned on, if either severe ice accretion is expected, or if there is any indication of icing on the airframe.

HOLDING

If holding is performed in icing conditions, the flight crew should maintain clean configuration. This is because prolonged flight in icing conditions with the slats extended should be avoided.

APPROACH

If significant ice accretion develops on parts of the wing that have not been deiced, the aircraft speed must be increased (*Refer to FCOM/PRO-SUP-30 OPERATIONS IN ICING CONDITIONS*).

When the temperature is lower than ISA -10, the target altitudes (provided by the ATC) must be corrected, by adding the values that are indicated in the table below:

Corrections to be Added			
Height	ISA -10	ISA -20	ISA -30
500	50	70	100
1 000	100	140	190
2 000	200	280	380
3 000	290	420	570
4 000	390	570	760
5 000	490	710	950

These corrections corresponds approximately to $4 \times \text{Delta ISA} \times \text{Height (ft)} / 1000$

LANDING

Obviously, landings should be avoided on very slippery runways. However, if it is not possible to avoid such landings, the following factors (linked to operations on contaminated runways) should be considered:

- Braking action

- Directional control

BRAKING ACTION

The presence of fluid contaminants on the runway has an adverse effect on braking performance, because it reduces the friction between the tires and the surface of the runway. It also creates a layer of fluid between the tires and the runway surface, and reduces the contact area. The landing distances, indicated in the QRH, provide a good assessment of the real landing distances for specific levels of contamination.

A firm touchdown should be made and MAX reverse should be selected, as soon as the main landing gear is on ground. Using reversers on a runway that is contaminated with dry snow may reduce visibility, particularly at low speeds. In such cases, reverse thrust should be reduced to idle, if necessary.

The use of MED auto-brake is recommended, when landing on an evenly contaminated runway. It is possible that the DECEL light on the AUTO BRK panel will not come on, as the predetermined deceleration may not be achieved. This does not mean that the auto-brake is not working.

In the case of uneven contamination on a wet or contaminated runway, the autobrakes will be used in accordance with the QRH. The maximum landing distance (MLD) should be used as a reference for the autobrakes.

loading, that results in asymmetric braking and increases the weathercock tendency of the aircraft.

The rudder should be used for directional control after touchdown, in the same way as for a normal landing. Use of the tiller must be avoided above taxi speed, because it may result in nosewheel skidding, and lead to a loss of directional control.

When required, differential braking must be applied by completely releasing the pedal on the side that is opposite to the expected direction of the turn. This is because, on a slippery runway, the same braking effect may be produced by a full or half-deflection of the pedal.

Landing on a contaminated runway in crosswind requires careful consideration. In such a case, directional control problems are caused by two different factors:

- If the aircraft touches down with some crab and the reverse thrust is selected, the side force component of reverse adds to the crosswind component and causes the aircraft to drift to the downwind side of the runway.
- As the braking efficiency increases, the cornering force of the main wheels decreases. This adds to any problems there may be with directional control.

If there is a problem with directional control:

- Reverse thrust should be set to idle, in order to reduce the reverse thrust side-force component.
- The brakes should be released, in order to increase the cornering force.
- The pilot should return to the runway centerline, reselect reverse thrust, and resume braking (*Refer to NO-160 ROLL OUT*).

The concept of equivalent runway condition is used to determine the maximum recommended crosswind. The following table indicates the maximum recommended crosswinds related to the reported braking actions:

Reported Braking Action	Reported Runway Friction Coefficient	Equivalent Runway Condition	Maximum Crosswind (knots)
Good/Medium	0.39 to 0.36	1	29
Medium	0.35 to 0.3	2/3	25
Medium/Poor	0.29 to 0.26	2/3	20
Poor	≤0.25	3/4	15
Unreliable	-	4/5	5

TAXI IN

During taxi-in, after landing, the flaps/slats should not be retracted. This is because retraction could cause damage, by crushing any ice that is in the slots of the slats. When the aircraft arrives at the gate, and the engines are stopped, a visual inspection should be performed to check that the slats/flaps areas are free of contamination.

They may then be retracted, with the electric pumps.

PARKING

At the end of the flight, in extreme cold conditions, cold soak protection is requested when a longer stop over is expected.

TURBULENCE

Ident.: SI-010-00005703.0001001 / 26 MAR 08

Applicable to: ALL

PREFACE

The flight crew must use weather reports and charts to determine the location and altitude of possible CBs, storms, and Clear Air Turbulence (CAT). If turbulence is expected, the flight crew must turn on the seatbelt signs, in order to prepare passengers and prevent injury.

TAKE-OFF

For takeoff in high turbulence, the flight crew must wait for the target speed +20 kt (limited to VFE-5) before retracting the slats/flaps (e.g. the flight crew must wait for F+20 kt before setting Flaps 1).

IN FLIGHT

USE OF RADAR

Areas of known turbulence, associated with CBs, must be avoided. Good management of the radar tilt is essential, in order to accurately assess and evaluate the vertical development of CBs. Usually, the gain should be left in AUTO. However, selective use of manual gain may help to assess the general weather conditions. Manual gain is particularly useful, when operating in heavy rain, if the radar picture is saturated. In this case, reduced gain will help the flight crew to identify the areas of heaviest rainfall, that are usually associated with active CB cells. After using manual gain, it should be reset to AUTO, in order to recover optimum radar sensitivity. A weak echo should not be a reason for the flight crew to underestimate a CB, because only the wet parts of the CB are detected. The decision to avoid a CB must be taken as early as possible, and lateral avoidance should, ideally, be at 20 nm upwind.

USE OF AP AND A/THR

If moderate turbulence is encountered, the flight crew should set the AP and A/THR to ON with managed speed.

If severe turbulence is encountered, the flight crew should keep the AP engaged. Thrust levers should be set to turbulence N1 (Refer to QRH), and the A/THR should then be disconnected. Use of the A/THR is, however, recommended during approach, in order to benefit from the GS mini.

If the aircraft is flown manually, the flight crew should be aware of the fact that flight control laws are designed to cope with turbulence. Therefore, they should avoid the temptation to fight turbulence, and should not over-control the sidestick.

VMO/MMO EXCEEDANCE

In turbulence, during climb, cruise or descent, the aircraft may slightly exceed VMO/MMO with the autopilot (AP) engaged.

To prevent such an exceedance, adapt speed or Mach target.

If severe turbulence is known or forecasted, consider the use of turbulence speed.

If the current speed is close to the VMO (maximum operating speed), monitor the speed trend symbol on the PFD.

If the speed trend reaches, or slightly exceeds, the VMO limit:

- Use the FCU immediately to select a lower speed target.

If the speed trend significantly exceeds the VMO red band, without high speed protection activation:

- Select a lower target speed on the FCU and, if the aircraft continues to accelerate, consider disconnecting the AP.
- Before re-engaging the AP, smoothly establish a shallower pitch attitude.

If the aircraft accelerates above VMO with the AP engaged, the AP will disengage on reaching the high speed protection. The high speed protection will apply a nose-up order up to 1.75 g, in addition to pilot input during VMO recovery. Therefore, make a smooth pitch correction in order to recover proper speed.

Speedbrakes may be used in case of high speed exceedance, but the flight crew should be aware of pitch influence. In addition, speedbrakes will be used with caution, close to the ceiling.

High Speed Protection may also result in activation of the angle of attack protection. Depending on the ELAC standard, the crew may have to push on the stick to get out of this protection law.

In all events, check the AP engagement status, and re-engage it when appropriate. It may have tripped and the associated aural warning may have been superseded by the overspeed aural warning.

CONSIDERATIONS ON CAT

Clear Air Turbulence (CAT) can be expected by referring to weather charts and pilot reports. However, the radar cannot detect CAT, because it is "dry turbulence".

If CAT is encountered, the flight crew may consider avoiding it vertically, keeping in mind that the buffet margin reduces as the altitude increases.

MISCELLANEOUS

- The flight crew must set the harness to on, check that the seat belts signs are on and use all white lights in thunderstorms.
- Turbulence speeds are indicated in the QRH.
- It is not necessary to set the ENG START selector to IGN. In the case of an engine flameout, the igniters will trigger automatically.

WINDSHEAR

Ident.: SI-010-00005705.0001001 / 21 MAY 08

Applicable to: ALL

BACKGROUND INFORMATION

WINSHEAR PHENOMENON


The windshear is mostly due to cool shaft of air, like a cylinder between 0.5 nm and 1.5 nm width that is moving downward. When the air encounters the ground:

- Mushrooms horizontally, causing horizontal wind gradient
- Curls inward at the edges, causing vertical air mass movement.

Flight safety is affected, because:

- Horizontal wind gradient significantly affects lift, causing the aircraft to descend or to reach very high AOA.
- Vertical air mass movement severely affect the aircraft flight path.

Windshear phenomenon

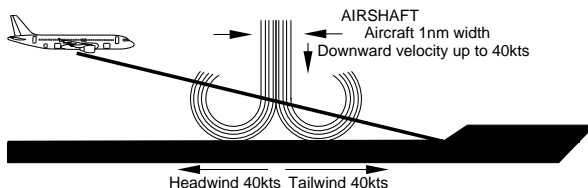

AWARENESS AND AVOIDANCE

Awareness of the weather conditions that cause windshear will reduce the risk of an encounter. Studying meteorological reports and listening to tower reports will help the flight crew to assess the weather conditions that are to be expected during

takeoff or landing.

If a windshear encounter is likely, the takeoff or landing should be delayed until the conditions improve, e.g. until a thunderstorm has moved away from the airport.

STRATEGY TO COPE WITH WINDSHEAR

The windshear and microburst are hazardous phenomena for an aircraft at takeoff or landing. The strategy to cope with windshear is:

- **Increasing flight crew awareness** through the Predictive Windshear System (if available)
- **Informing the flight crew** of unexpected air mass variations through FPV and approach speed variations
- **Warning the flight crew** of significant loss of energy through "SPEED, SPEED, SPEED" and "WINDSHEAR" aural warnings (if available).
- **Providing effective tools** to escape the shear through ALPHA FLOOR protection, SRS pitch order, high AOA protection and Ground Speed mini protection.


Increasing flight crew awareness (if available)

When the airshaft of a microburst reaches the ground, it mushrooms outward carrying with it a large number of falling rain droplets. The radar can measure speed variations of the droplets, and as a result, assess wind variations. This predictive capability to assess wind variations is performed by the Predictive Windshear System (PWS). The PWS operates automatically below 2 300 ft AGL, regardless of whether the radar is turned on or off. OFF.

Informing flight crew

The FPV associated with the approach speed variations (GS mini protection) is an effective means for informing the flight crew of unexpected air mass variations: Approach speed variations and lateral FPV displacement reflect horizontal wind gradient. Vertical FPV displacement reflects the vertical air mass movement.

bird and target speed - wind interpretation

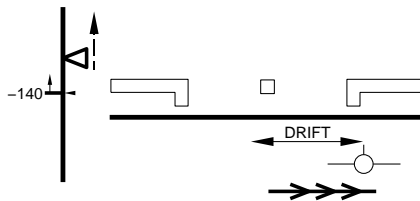

Warning the flight crew

The "SPEED, SPEED, SPEED" low energy warning (if available) is based on the aircraft speed, acceleration and flight path angle. This warning attracts the PF eyes to the speed scale, and request rapid thrust adjustment. In windshear conditions, it is the first warning to appear, before the activation of the alpha floor. The following table provides some typical values of the speed at which the warning could occur in two different circumstances.

Deceleration Rate	Flight Path Angle	Warning
-1 kt/second	-3 °	VLS -7 kt
-1 kt/second	-4 °	VLS -1 kt

In addition, the aircraft has a reactive windshear warning system. This system triggers if the aircraft encounters windshear. In such a case, there is a "WINDSHEAR WINDSHEAR WINDSHEAR" aural warning.

Providing effective tools

There are three efficient tools to assist the flight crew to escape:

- The alpha floor protection
- the SRS AP/FD pitch law
- The high angle of attack protection

When the alpha floor protection is triggered, the A/THR triggers TOGA on all engines. The FMA displays A FLOOR, that changes to TOGA LK, when the aircraft angle-of-attack has decreased. TOGA/LK can only be deselected by turning the A/THR off.


The SRS pitch mode ensures the best aircraft climb performance. Therefore, the procedure requests following the SRS pitch bar and possibly full aft stick, in order to follow the SRS orders and minimize the loss of height.

The high angle-of-attack protection enables the PF to safely pull full aft stick, if needed, in order to follow the SRS pitch order, or to rapidly counteract a down movement. This provides maximum lift and minimum drag, by automatically retracting the speed brakes, if they are extended.

OPERATIONAL RECOMMENDATIONS**TAKE-OFF**

Predictive windshear ("WINDSHEAR AHEAD" aural warning), if available

If predictive windshear aural warning is generated on the runway before take-off, take-off must be delayed.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	SUPPLEMENTARY INFORMATION ADVERSE WEATHER
---	--

If a predictive windshear aural warning is generated during the takeoff roll, the Captain must reject the takeoff (the aural warning is inhibited at speeds greater than 100 kt).

If the predictive windshear aural warning is generated during initial climb, the flight crew must:

- Set TOGA
- Closely monitor the speed and the speed trend
- Ensure that the flight path does not include areas with suspected shear
- Change the aircraft configuration, provided that the aircraft does not enter windshear.

Reactive windshear (WINSHEAR, WINSHEAR, WINSHEAR aural warning) or windshear detected by pilot observation

If the windshear starts before V1 with significant speed and speed trend variations and the captain decides that there is sufficient runway to stop the airplane, the captain must initiate a rejected take-off.

If the windshear starts after V1, the crew will set TOGA and will apply the QRH checklist actions from memory. The following points should be stressed:

- The configuration should not be changed until definitely out of the shear, because operating the landing gear doors causes additional drag.
- The PF must fly SRS pitch orders rapidly and smoothly, but not aggressively, and must consider the use of full backstick, if necessary, to minimize height loss.
- The PNF should call wind variation from the ND and V/S and, when clear of the shear, report the encounter to ATC.

APPROACH

Predictive windshear (if available)

In case the "MONITOR RADAR DISPLAY" is displayed or the ADVISORY ICON appears, the flight crew should either delay the approach or divert to another airport. However, if the approach is continued, the flight crew should consider the following:

- The weather severity must be assessed with the radar display.
- A more appropriate runway must be considered.
- A Conf 3 landing should be considered.
- The flight crew should increase VAPP displayed on MCDU PERF APP page up to a maximum VLS +15 kt.

- Using the TRK/FPA or ILS, for an earlier detection of vertical path deviation should be considered.
- In very difficult weather conditions, the A/THR response time may not be sufficient to manage the instantaneous loss of airspeed. *Refer to NO-100 FINAL APPROACH* for the applicable technique description.
- In case the "GO AROUND WINDSHEAR AHEAD" message is triggered, the PF must set TOGA for go-around. The aircraft configuration can be changed, provided that the windshear is not entered. Full back stick should be applied, if required, to follow the SRS or minimize loss of height.

Reactive windshear (if available)

In case of the "WINDSHEAR WINDSHEAR WINDSHEAR" aural warning, the PF must set TOGA for go-around. However, the configuration (slats/flaps, gear) must not be changed until out of the shear. The flight crew must closely monitor the flight path and speed.

VOLCANIC ASH

Ident.: SI-010-00005706.0001001 / 21 MAY 08

Applicable to: ALL

PREFACE

Volcanic ash or dust consists of very abrasive particles, that may cause engine surge and severe damage to aircraft surfaces that are exposed to the airflow. For this reason, operations in volcanic ash must be avoided. However, if such operations cannot be avoided, the operators should apply the following recommendations.

GROUND OPERATIONS


PRELIMINARY COCKPIT PREPARATION

The use of APU should be avoided whenever possible and the use of the Ground Power Unit (GPU) should be preferred.

The wipers will not be used for any reason.

EXTERIOR INSPECTION

Maintenance personnel must remove ash that has settled on exposed lubricated surfaces that can penetrate seals or enter the engine gas path, air conditioning system, air data probes and other orifices on the aircraft. They must clean the engines air inlet of any volcanic ash. In addition, they must clean the 25 ft area around the engine inlet.

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	SUPPLEMENTARY INFORMATION ADVERSE WEATHER
---	--

ENGINE START

The use of an external pneumatic supply should be preferred when possible. If not possible, the APU may be used to start the engines.

Before starting the engines, the crew must use dry cranking. This will blow out any ash that may have entered the booster area.

TAXI

The flight crew must move forward the thrust levers smoothly to the minimum required thrust to taxi, and must avoid any sharp or high-speed turns. The bleeds must be kept OFF.

TAKE-OFF

It is advisable to use the rolling takeoff technique, and smoothly apply thrust.

IN FLIGHT

CRUISE

The flight crew must avoid flying into areas of known volcanic ash. If a volcanic eruption is reported, while the aircraft is in flight, the flight must be rerouted to remain clear of the affected area. The volcanic dust may spread over several hundred miles. Whenever possible, the flight crew should stay on the upwind side of the volcano.

Depending on outside conditions (night flight, clouds), volcanic dust might not be visible.

However, several phenomena can indicate that the aircraft is flying through ash cloud, for example:

- Smoke or dust in the cockpit
- Acrid odour similar to electrical smoke
- Engine malfunction, e.g. a rising EGT
- At night, the appearance of St Elmo fire, bright white or orange glow appearing in engine inlets or sharp and distinct beams from the landing lights.

If an ash cloud is encountered, the applicable procedure is described in the QRH.

The essential actions to be taken are:

- 180 ° turn if possible. This is the quickest way to escape, because the ash cloud lateral dimension is not known

- Protecting the engines:
 - Set A/THR to OFF
 - Decrease engines thrust if possible and maximize engine bleed to increase the engine surge margin
 - Start the APU for further engine restart, if required
- Protecting the flight crew and passengers:
 - Don the oxygen mask
 - Consider oxygen for the passengers.
- Monitoring the flight parameters:
 - Monitor the EGT and fuel flow, because an engine part may be eroded
 - Monitor and cross-check the IAS because an IAS indication may be corrupted

A diversion to the nearest appropriate airport should be considered.

LANDING

The use of reverse should be avoided, unless necessary.

GENERAL

Ident.: SI-020-00005709.0001001 / 26 MAR 08

Applicable to: ALL

Two flying references may be used on the PFD:

- The attitude
- The Flight Path Vector (FPV), called the "bird".

The pilot selects the flight reference with the HDG/VS TRK/FPA p/b on the FCU.

THE ATTITUDE

Ident.: SI-020-00005710.0001001 / 26 MAR 08

Applicable to: ALL

When HDG/VS is selected on the FCU, "bird" is off, and the attitude is the flight reference with HDG and VS as basic guidance parameters.

The attitude flight reference should be used for dynamic manoeuvres, for example, take-off or go-around. An action on the sidestick has an immediate effect on the aircraft attitude. The flight crew can monitor this flight reference directly and accurately during these maneuvers.

THE FLIGHT PATH VECTOR

Ident.: SI-020-00005711.0001001 / 21 MAY 08

Applicable to: ALL

When TRK/FPA is selected on the FCU, the "bird" (the FPV) is the flight reference with the TRK and FPA as basic guidance parameters.

In dynamic manoeuvres, the "bird" is directly affected by the aircraft inertia and has a delayed reaction. As a result, the "bird" should not be used as a flight reference in dynamic manoeuvres.

The "bird" is the flying reference that should be used when flying a stabilized segment of trajectory, e.g. a non Precision Approach or visual circuit.


INFORMATION PRESENTATION

The FPV appears on the PFD as a symbol, known as "the bird". The bird indicates the track and flight path angle in relation to the ground.

The track is indicated on the PFD by a green diamond on the compass, in addition to the lateral movement of the bird in relation to the fixed aircraft symbol. On the ND, the track is indicated by a green diamond on the compass scale. The difference in angle between track and heading indicates the drift.

The flight path angle is indicated on the PFD by the vertical movement of the bird in relation to the pitch scale.

use of FPV

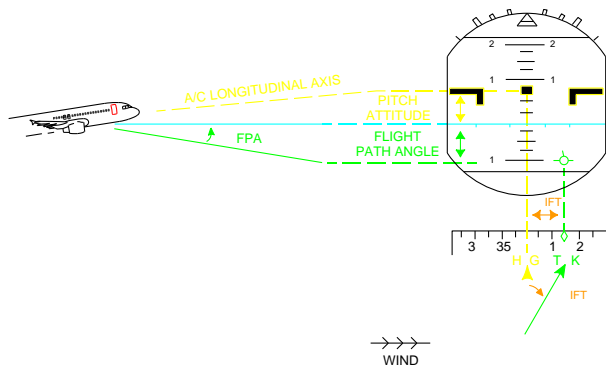


VISUAL CIRCUITS

The FPV can be used as a cross-reference, when flying visual circuits. On the downwind leg, the pilot should position the wings of the bird on the horizon, in order to maintain level flight. The downwind track should be set on the FCU. The pilot should position the tail of the bird on the blue track index on the PFD, in order to maintain the desired track downwind.

On the final inbound approach, the track index should be set to the final approach course of the runway. A standard 3° approach path is indicated, when the top of the bird's tail is immediately below the horizon, and the bottom of the bird is immediately above the 5° nose down marker.

use of FPV in final approach

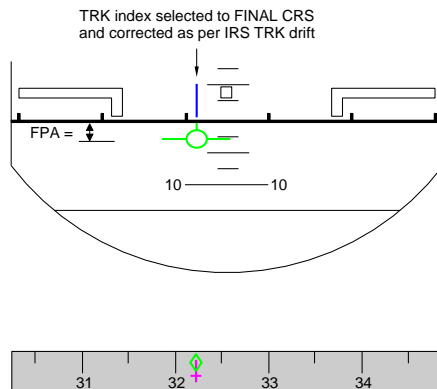


FINAL APPROACH

The bird is a very useful flight reference, because it provides the trajectory parameters, and quickly warns the pilot of downburst. In addition, together with the GS MINI protection, it is an excellent indicator of shears or wind variations. The position of the "bird" in relation to the fixed aircraft symbol provides an immediate indication of the wind direction. Therefore, when approaching the minima, the pilot knows in which direction to search for the runway.

If the target approach speed symbol moves upward, this indicates that there is headwind gust. If the bird drifts to the right, this indicates that there is wind from the left.

Bird and target speed- wind interpretation

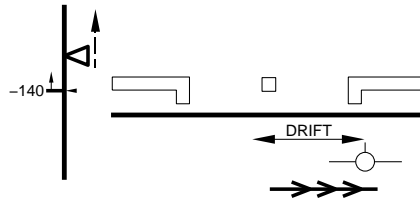

RELIABILITY

The FPV is computed from IRS data, therefore, it is affected by ADIRS errors. An error may be indicated by a small track error, usually of up to $\pm 2^\circ$. This can be easily determined during the approach.

The FPV is also computed from static pressure information. Therefore, the bird must be considered as not reliable, if altitude information is not reliable.

GO-AROUND

Ident.: SI-020-00005712.0001001 / 26 MAR 08
Applicable to: MSN 0852

For the go-around, the appropriate flight reference is the attitude, because go-around is a dynamic maneuver. Therefore, if the "bird" is on, the PF will ask the PNF to select HDG/VS, in order to recover the FD bars.

GO-AROUND

Ident.: SI-020-00005712.0002001 / 26 MAR 08
Applicable to: MSN 0781, 1320-2180

For the go-around, the appropriate flight reference is the attitude, because go-around is a dynamic maneuver. Therefore, when performing a go-around, regardless of the previously-selected flight reference, upon selection of TOGA, the FD bars are automatically restored in SRS/GA TRK modes, and the "bird" is automatically removed.

GENERAL

Ident.: SI-030-00005713.0001001 / 26 MAR 08

Applicable to: ALL

The primary function of the FMS is navigation i.e. to compute the aircraft's position as accurately as possible. The validity of all the others functions depends upon the accuracy of the FMS position.

The accuracy of the FMS navigation determines the flight crew's strategy for using the AP/FD modes, in addition to the ND display.

AIRCRAFT POSITION COMPUTATION

Ident.: SI-030-00005715.0001001 / 26 MAR 08

Applicable to: ALL

WITHOUT GPS PRIMARY**PRINCIPLE**

The FMS position is computed from the three IRS positions, that are combined to provide a MIXIRS position. The radio position is also combined, if two DMEs, a VOR/DME or a GPS supplemental are available. The GPS supplemental is considered to be an additional form of NAVAID, and can be accepted, if it falls within the radio position or the MIXIRS position.


INITIALISATION

Refer to NO-020 ADIRS INITIALIZATION

TAKE-OFF

Each FMGC uses the MIXIRS position as its position, until the thrust levers are pushed forward to TOGA. The FMS position is then updated to the runway threshold coordinates. The difference between the MIXIRS position and the FMS position is referred to as the TO BIAS. The TO BIAS is added to the MIXIRS position, for the subsequent FMS position.


FMS position updating at take off

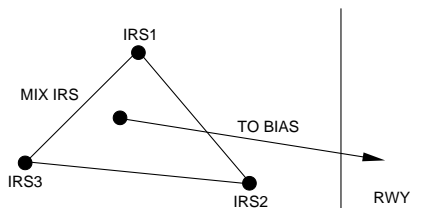

IN FLIGHT

The original TO BIAS is continuously updated with the current radio aid.

updating BIAS principle

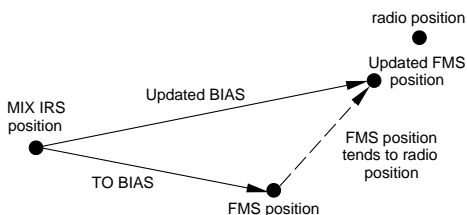

If the radio position is lost, the system uses the updated BIAS to determine the FMS position from the MIXIRS position.

NAVIGATION ACCURACY

The FMS computes the Estimated Position Error (EPE). The EPE is an estimate. To compute the EPE, the FMS considers the immediately available navigation means in the FMS position computation and applies defined tolerances for each of them. These tolerances assume that the navigation means are working properly. They ignore any possible excessive IRS drift or erroneous locations of NAVAIDS. The MCDU PROG page displays the HIGH/LOW indications, according to the EPE. These indications reflect the probable accuracy of the FMS navigation compared to the determined accuracy criteria.

WITH GPS PRIMARY

PRINCIPLE

The GPS interfaces directly with the IRS that outputs a GPIRS position. When a GPIRS position is available, it overrides the RADIO position, if available. Therefore,

the FMS position tends toward the GPIRS position.

INITIALISATION

Refer to NO-020 ADIRS INITIALIZATION

TAKE-OFF

The FM position is automatically updated at the runway thres

USE OF FMS

Ident.: SI-030-00005717.0001001 / 26 MAR 08

Applicable to: ALL

The navigation accuracy is managed through several MCDU pages:

PROG PAGE

This page indicates GPS PRIMARY.

The PROG displays the estimated navigation accuracy in green. This provides the EPE, if GPS PRIMARY LOST, or is computed by the GPS, if GPS PRIMARY is displayed

The PROG page displays the required navigation accuracy in blue (this can be changed). The required navigation accuracy thresholds are determined, depending on the flight phase, or can be manually entered. These thresholds are used to change from HIGH to LOW accuracy, or vice versa. These indications are used when flying within RNP airspace.

SELECTED NAVAIDS PAGE

The SELECTED NAVAID page is accessible from DATA/POSITION MONITOR/FREEZE/SEL NAVAIDS. It has a DESELECT prompt, that enables the flight crew to prevent the FMS from using the GPS data to compute the position, in the case of a major problem. GPS PRIMARY lost is then displayed on MCDU and ND. The GPS can be reselected using the same page.

PREDICTIVE GPS PAGE (IRS HONEYWELL ONLY)

The PREDICTIVE GPS page is accessible from PROG page. The GPS PRIMARY criteria depend upon the satellite constellation status (position and number) and this is predictable. The crew can assess the GPS PRIMARY status at destination or alternate.

ND/MCDU

A GPS PRIMARY message is displayed when GPS PRIMARY is again available. This message is clearable.

A GPS PRIMARY LOST message is displayed when GPS PRIMARY is lost. This message is clearable on MCDU but not on ND.

When the class of navigation accuracy is downgraded from HIGH to LOW (LOW to HIGH), a NAV ACCUR DOWNGRADE (UPGRADE) is displayed on ND and MCDU.

AIRCRAFT POSITION AWARENESS AND OPERATIONAL CONSEQUENCES

Ident.: SI-030-00005719.0001001 / 21 MAY 08

Applicable to: ALL


NAVIGATION ACCURACY INDICATIONS

The navigation accuracy indications are available on the MCDU PROG page. The following guidelines apply:

- If GPS PRIMARY is displayed, no navigation cross-check is required
- If GPS PRIMARY LOST, navigation cross-check is required in climb, in cruise, about every 45 min, before Top Of Descent, reaching TMA and IAF and whenever a navigation doubt occurs.
- The crew will use, IRS only, LOW and **NAV ACCUR DOWNGRAD** messages as indications to trigger a navigation accuracy check.

NAVIGATION ACCURACY CROSSCHECK TECHNIQUE

The principle consists in comparing the FMS position with the RADIO position (aircraft real position).


navigation accuracy cross check technique 1


Two different techniques may be used:

- Either the crew will insert a radio ident in MCDU PROG page (which provides a bearing/distance relative to FMS position) and will compare with raw data received from the NAVAID which materializes the aircraft real position. This allows the error Epsilon to be quantified.

- On the ND, the flight crew compares: The position of the needle and its associated DME distance (the real position of the aircraft) with the position of the NAVAID symbol and its associated distance, indicated by the range markers (these markers provide a bearing/distance, in relation to the FMS position).

navigation accuracy cross check technique 2

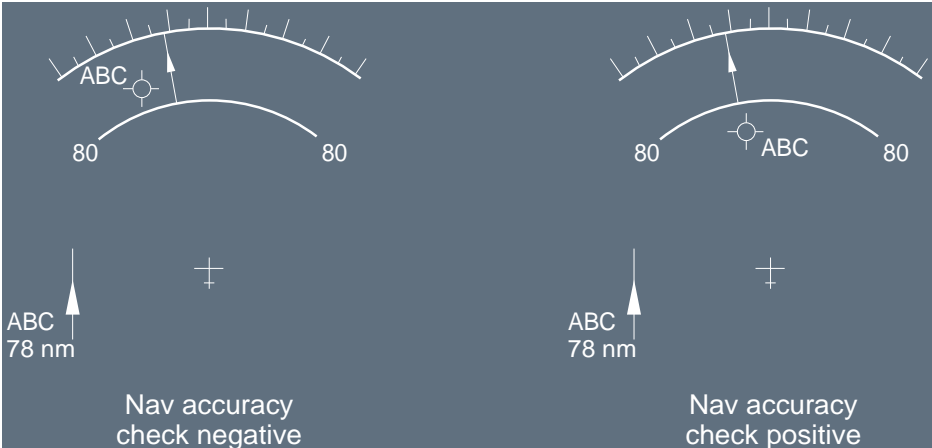


OPERATIONAL CONSEQUENCES

The result of the navigation accuracy crosscheck dictates the strategy the pilot will apply for the use of the ND display, the AP/FD modes, and EGPWS.

		ND		AP/FD mode	EGPWS
		PF	PNF		
GPS PRIMARY	-	Arc or Rose NAV with raw data when required		Lateral and vertical managed modes	ON

To be continued on next page

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	SUPPLEMENTARY INFORMATION NAVIGATION ACCURACY
---	--

Continued from previous page

GPS PRIMARY LOST Or No GPS	Cruise	Navigation accuracy check positive(\leq 3 nm)	Arc or Rose NAV with raw data when required	Lateral and vertical managed modes	ON
		Navigation accuracy check negative(>3 nm)	ARC or ROSE NAV may be used with care and with raw data	Lateral and vertical managed modes with care with raw data	OFF
	Approach (1)	Navigation accuracy check positive(\leq 1 nm)	Arc or Rose NAV with raw data	Lateral and vertical managed modes	ON
		Navigation accuracy check negative(>1 nm)	ROSE VOR or ILS as required	Lateral and vertical selected modes	OFF


(1) A GPS defined Non Precision Approach must be interrupted if GPS PRIMARY LOST message is displayed.

POSITION UPDATE

In case of an obvious and major map shift noticed by specific messages such as "CHECK A/C POSITION, FM1/FM2 POS MISMATCH", the aircraft position may be updated on the MCDU PROG page. Two techniques are available:

The recommended technique is to carry out a FMS update over a beacon by pressing the UPDATE prompt once estimating that the aircraft overflies the beacon using the associated needle. The potential error induced is approximately 4 to 5 nm. When the position update is achieved, the EPE is automatically set to a higher value and the navigation accuracy is low.

The second technique consists in updating the FM position when flying over a Point/Bearing/Distance (P/B/D) with reference to beacon raw data (Needle + Distance) rather than the beacon itself. The potential for error is far less when the distance is greater than 60 nm. The flight crew will keep in mind the potential 180 ° error on bearing.

FM position update in flight


GENERAL

Ident.: SI-040-00005722.0001001 / 26 MAR 08

Applicable to: ALL

The aircraft Gross Weight (GW) and Centre of Gravity (CG) are computed independently by the FM and FAC:

GW and CG values FM computed are used for:

- FM predictions and speeds
- ECAM (GW)
- MCDU (GW and CG)

GW and CG values FAC computed are used for:

- Flight control laws
- Computation of characteristic speeds (VLS, F, S, GD) for display on PFD

A ZFW or ZFWCG entry error in MCDU INIT B page induces calculation errors that are to be highlighted.


TECHNICAL BACKGROUND

Ident.: SI-040-00005723.0001001 / 26 MAR 08

Applicable to: ALL

The GW and CG computation is as follows:

1. The pilot enters the ZFW and ZFWCG in the MCDU INIT B page
2. The FMGC computes the GW and CG from:
 - The ZFW, ZFWCG inserted in the MCDU INIT B page
 - The fuel quantities from the Fuel Quantity Indicator (FQI)
 - The Fuel Flow from the FADEC.
3. This current GW and/or CG is used for:
 - FM predictions and speeds
 - ECAM (GW only)
 - MCDU (GW and CG)
4. The FAC computes its own GW and CG from aerodynamic data.
5. GW and CG FAC computed are used for:
 - Minor adjustments on the flight control laws
 - Characteristic speeds (VLS, F, S, Green dot) display on PFD.

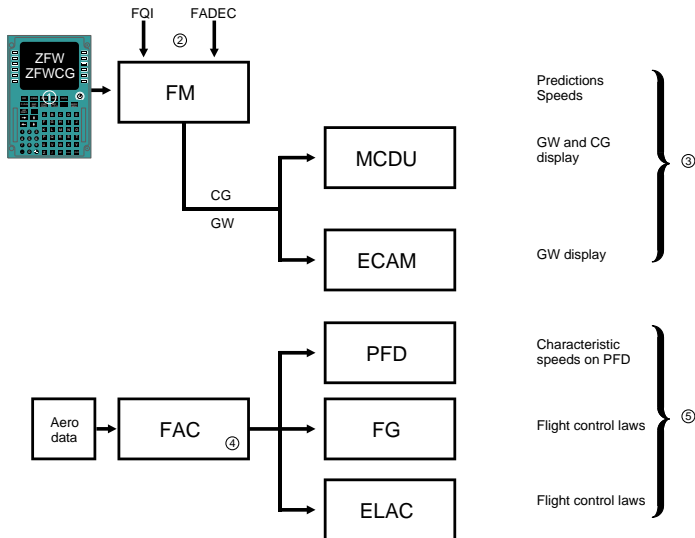

- Note:
1. On ground, FAC uses the GW FM computed.
 2. In flight, at low altitude (below 15 000 ft), low speed (below 250 kt) and flight parameters stabilized, GW FAC computed comes from aerodynamic data. If these conditions are not met, GW FAC computed equates to the last memorized GW - fuel used.
 3. If the GW FM computed and FAC computed differs from a given threshold, a "CHECK GW" message appears on the MCDU scratchpad.

ZFW ENTRY ERROR AND OPERATIONAL CONSEQUENCES

Ident.: SI-040-00005724.0001001 / 22 APR 08

Applicable to: ALL

If the pilot enters erroneous ZFW on MCDU INIT B page, this will affect as follows:
GW and, to a lesser degree, CG, computed by FM are erroneous. This induces the following consequences:

- The FM predictions and speeds are erroneous
- Incorrect GW and CG on MCDU FUEL PRED page
- Incorrect GW displayed on ECAM

FAC GW, which is based on FM GW on ground, will be updated only once airborne through a specific slow calculation using AOA information. Consequently,

- Characteristic speeds on PFD at take-off are erroneous, but they are correct in flight
- SRS mode guidance is affected if computed VLS is above V2 as inserted in the MCDU PERF TAKE-OFF page.

Note: 1. In flight, if the FM and FAC GW differ from a given threshold, a "CHECK GW" message is triggered on the MCDU.
 2. Valpha prot, Valpha max, Vsw are not affected since based on aerodynamic data.

ERRONEOUS FUEL ON BOARD ENTRY

As long as the engines are not started, the FM GW is erroneous and above-mentioned consequences apply. Once the engines are started, the fuel figures are updated and downstream data update accordingly.

It should be noted however, that the FOB on ECAM is correct since it is provided from FQI data.

OPERATIONAL RECOMMENDATIONS

Ident.: SI-040-00005726.0001001 / 26 MAR 08

Applicable to: ALL

ZFW entries should be cross-checked by both crew members to avoid entry error.

If the "CHECK GW" amber warning is displayed on the MCDU, a significant discrepancy exists between the FM computed GW and the FAC computed GW.

The crew will compare the Load and Trim Sheet (LTS) figures with the FM GW and fuel used:

- If an obvious entry error is detected, FM GW will be updated on the MCDU FUEL PRED page.
- If FM and LTS GW are in accordance and appear to be correct, the FAC computed GW should be suspected. (AOA sensor problem). Consequently, characteristic speeds on PFD are erroneous and should be disregarded. Characteristic speeds should be extracted from QRH.
- If FM and LTS GW are in accordance but LTS GW is suspected, FAC and QRH characteristic speeds should be compared (to validate FAC outputs) and the most appropriate applied.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

SUPPLEMENTARY INFORMATION

ZFW - ZFCG ENTRY ERRORSZFW - ZFCG ENTRY ERRORS

Intentionally left blank

TECHNICAL BACKGROUND

Ident.: SI-060-00005727.0001001 / 21 MAY 08

Applicable to: ALL

GENERAL









A Traffic Alert and Collision Avoidance System (TCAS) provides the flight crew with traffic information and warnings of potential conflicts with vertical avoidance instructions. The TCAS can only detect and indicate other traffic, that is equipped with a transponder.

The ND displays the traffic information, together with:

- The bearing and range to the intruder
- The intruder closure rate
- The relative altitude difference.

If the TCAS considers the intruder to be a potential collision threat, it generates a visual and aural Traffic Advisory (TA). If it considers the intruder to be real collision threat, it generates a visual and aural Resolution Advisory (RA).

INTRUDER CLASSIFICATION

Intruder	Display		Type of collision threat	Aural warning	Crew action
No threat traffic or others			No threat	-	-
	-17 (w)				
Proximate			Consider as No threat	-	-
	-10 (w)				
Traffic Advisory (TA)			Potential threat	"TRAFFIC"	Establish visual contact. No evasive maneuver
	-09 (a)				
Resolution Advisory (RA)			Collision threat	Preventive, e.g. "MONITOR V/S"	Do not alter your flight path and keep VS out of red sector
	-06 (r)			Corrective, e.g. "CLIMB"	Smoothly and firmly (0.25 g) follow VSI green sector within 5 s
				Corrective, e.g. "CLIMB NOW" or "INCREASE CLIMB"	Smoothly and firmly (0.35 g) follow VSI green sector within 2.5 s



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

SUPPLEMENTARY INFORMATION

TCAS

OPERATIONAL RECOMMENDATIONS

Ident.: SI-060-00005731.0001001 / 25 JUN 08

Applicable to: ALL

The flight crew should select

- ABV in climb (+9 900 ft/-2 700 ft)
- ALL in cruise (+2 700 ft/ -2 700 ft)
- BELOW, if the cruise altitude is within 2 000 ft of FL 410, or in descent (+2 700 ft/-9 900 ft)
- THRT in heavy traffic terminal area
- TA, in the case of:
 - Engine failure
 - Flight with landing gear down
 - Known nearby traffic, that is in visual contact
 - Operations at specific airports, and during specific procedures that an operator identifies as having a significant potential for not wanted and not appropriate RAs, e.g. closely spaced parallel runways, converging runways.

Pilots should comply with the vertical speed limitations during the last 2 000 ft of a climb or descent. In particular, pilots should limit vertical speeds to 1 500 ft/min during the last 2 000 ft of a climb or descent, especially when they are aware of traffic that is converging in altitude and intending to level off 1 000 ft above or below the pilot's assigned altitude.

If a TA is generated:

- The PF announces: "TCAS, I have controls".
- The PF flies and announces the bearing and distance displayed on his ND.
- The PNF looks outside to get visual contact.
- No evasive maneuver should be initiated

des thput-1.55094(8(v)6.37208(e)2

- The PF disconnects the AP, and smoothly and firmly follows the Vertical Speed Indicator (VSI) green sector within 5 s, and requests that both FDs be disconnected.

Note: Both FDs must be disconnected once APs are disconnected:

- To ensure autothrust speed mode
 - To avoid possible confusion between FD bar orders and, TCAS aural and VSI orders
- The PNF disconnects both FDs, but will not try to see intruders.
 - The PF will avoid excessive maneuvers, and keep the Vertical Speed outside the red area of the VSI and within the green area. If necessary, the PF must use the full speed range between $V_{\alpha max}$ and V_{max} .
 - The PNF must notify ATC.
 - The flight crew should never maneuver in the opposite direction of the RA, because TCAS maneuvers are coordinated.
 - In final approach, i.e. "CLIMB", "CLIMB NOW", "INCREASE CLIMB", the flight crew will initiate a go-around.

When clear of conflict:

- The flight crew must resume normal navigation, in accordance with ATC clearance, and using the AP, as required.



A318/A319/A320/A321
FLIGHT CREW TRAINING
MANUAL

SUPPLEMENTARY INFORMATION

TCAS

Intentionally left blank

GENERAL

Ident.: SI-070-00005738.0001001 / 26 MAR 08

Applicable to: ALL

The weather radar has two main functions:

- Weather detection
- Mapping.

Weather detection is the primary function. For weather detection, the radar detects precipitation droplets. The strength of the echo is in proportion to the droplet size, composition and quantity (e.g. the reflection of water particles is five times greater than ice particles of the same size). Therefore, the weather radar does not detect weather that has small droplets (e.g. clouds or fog), or that does not have droplets (e.g. clear air turbulence).

Mapping is the secondary function. For mapping, the echo takes into account the difference between incoming and outgoing signals. Any significant difference in the signal is easily mapped (e.g. mountains or cities), but a small difference in the signal is not mapped (e.g. calm sea or even ground).

FUNCTIONS


Ident.: SI-070-00005733.0001001 / 26 MAR 08

Applicable to: ALL

The flight crew uses the following controls to operate the radar:

TILT

"Tilt" is the angle between the antenna radar and the horizon, irrespective of the aircraft's pitch and bank angles. The antenna stabilizes by using IRS data.



To help avoid weather, it is important to effectively manage the tilt, taking into account the flight phase and the ND range.

Usually, it is the appropriate tilt value that provides ground returns on the top of the ND.

In case of overscanning, a cell may not be detected or may be underestimated, when the radar beam scans the upper part of the cell. This occurs because, at high altitude, this cell may have ice particles, and therefore the reflection of these particles is weak.

If AUTO TILT function is installed, selecting AUTO ensures a proper tilt management along the flight.

GAIN

Gain control is mostly used in AUTO/CAL mode. The detection or evaluation of cells will always start in AUTO/CAL gain mode.

However, the gain may be manually tuned to detect the strongest part of a cell displayed in red on the ND. If the gain is slowly reduced, the red areas (level 3 return) will slowly become yellow areas (level 2 return), and the yellow areas will become green areas (level 1). The last part of the cell to turn yellow is the strongest area.

The gain must then be reset to AUTO/CAL mode.

MODE

The operation modes are WX, WX+T, TURB, MAP.

WX+T or TURB modes are used to locate the wet turbulence area. TURB mode detects wet turbulence within 40 nm, and is not affected by the gain. TURB mode should be used to isolate turbulence from precipitation.

GCS

The Ground Clutter Suppression (GCS) operates in WX mode, and inhibits the ground echoes on the ND.

It is sometimes difficult to differentiate between weather and ground returns. A change in tilt rapidly changes the shape and color of ground returns and eventually makes them disappear. This is not the case for weather.

RCT

The React (RCT) function is used temporarily to help detect weather or buildups beyond of the weather already detected.

PWS

Refer to SI-010 WINDSHEAR on adverse weather.

OPERATIONAL RECOMMENDATIONS FOR WEATHER DETECTION

Ident.: SI-070-00005734.0001001 / 26 MAR 08

Applicable to: ALL

FLIGHT PHASE	DETECTION AND MONITORING PROCEDURES	COMMENTS
TAXI	clear on parking area, set ND to lowest range, TILT DOWN then UP; Check appearance/disappearance of ground returns.	TILT ANTENNA CHECK (away from people).
TAKEOFF	If weather is suspected, SLOWLY SCAN up to + 15°, then TILT + 4°.	Scanning along departure path.
CLIMB	To avoid OVERSCANNING, TILT DOWNWARD as the A/C climbs, and maintain GND RETURNS ON TOP OF ND.	TILT angle function of altitude and ND RANGE.
CRUISE	Use TILT slightly NEGATIVE to maintain ground returns on top of ND: Range 320 TILT \approx 1 DN Range 160 TILT \approx 1,5 DN Range 80 TILT \approx 3,5 DN Range 40 TILT \approx 6 DN Use TURB to ISOLATE Turbulence – GAIN to AUTO.	No ground returns beyond line of view. $Dnm = 1,23\sqrt{ALT}$ ft FL 370 D 240nm Poor ground returns over calm sea / even ground.
DESCENT	During DES, TILT UPWARD approximately + 1° / 10000 ft in higher altitudes, then + 1°/5000 ft below 15000 ft.	
APPROACH	TILT + 4°.	To avoid ground returns.

Note: It is difficult to differentiate between weather returns and ground returns: A change in TILT causes the shape and color of ground returns to change rapidly. These ground returns eventually disappear. This is not the case for weather returns.

OTHER OPERATIONAL RECOMMENDATIONS

Ident.: SI-070-00005736.0001001 / 26 MAR 08

Applicable to: ALL

WEATHER AVOIDANCE

- When weather is suspected, scan for it by varying the radar tilt. If AUTOTILT or MULTISCAN function is available, reselect AUTO after scanning.
- Do not underestimate a thunderstorm, even if echo is weak (only wet parts are detected)
- Avoid all red + magenta cells by at least 20 nm
- Deviate upwind instead of downwind (less probability of turbulence or hail)
- Do not attempt to fly below a storm even visual (turbulence, shear, altimetry)
- Use TURB detection to isolate turbulence from precipitation
- There may be severe turbulence, up to 5 000 ft above a cell
- Storms with tops above 35 000 ft are hazardous
- Frequent and vivid lightning indicates a high probability of severe turbulence.

WEATHER PENETRATION

In the case of storm penetration, the flight crew must take full advantage of the radar. For flight crew guidelines, in the case of turbulence, *Refer to SI-010 TURBULENCE.*

MAPPING

TILT and GAIN have to be adjusted harmoniously, because the ground returns vary greatly with the angle of the radar beam which illuminates them.


- Use MAP to detect PROMINENT TERRAIN (mountain, city, and coastline)
- Adjust TILT and GAIN - Mapping coverage varies with tilt and aircraft altitude.

TILT ANGLE	AREA SCANNED AT FL 330
3 ° DN	72 nm to 190 nm
0 ° DN	47 nm to 190 nm
7 ° DN	36 nm to 70 nm
10 ° DN	26 nm to 41 nm

However, flight crew should NOT USE the weather radar as a terrain avoidance system.

PREVENTING IDENTIFIED RISKS

Intentionally left blank

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PREVENTING IDENTIFIED RISKS PRELIMINARY PAGES TABLE OF CONTENTS
---	---

PIR-PLP. PRELIMINARY PAGES	
TABLE OF CONTENTS	1/2
PIR-010. PREVENTING IDENTIFIED RISKS	
INTRODUCTION.....	1/6
NORMAL OPERATIONS.....	2/6
SYSTEM OPERATIONS / FAILURES	3/6



A318/A319/A320/A321

FLIGHT CREW TRAINING
MANUAL

PREVENTING IDENTIFIED RISKS

PRELIMINARY PAGES

TABLE OF CONTENTS

Intentionally left blank

INTRODUCTION

Ident.: PIR-010-00005742.0001001 / 26 MAR 08

Applicable to: ALL

The aim of this chapter is to highlight some of the risks encountered by flight crews, in order to improve:

- Flight crewmembers' awareness of these risks
- Risk management.







These risks are categorized according to either:

- Flight phases, for the risks related to normal operations, or
- ATA chapters, for the risks more specifically related to the flight crews' interaction with systems, or to system failures.

For each risk, the following table provides:

- The flight phase or ATA chapter related to the risk
- A description of the risk
- A description of the consequences, if the flight crew does not correctly manage the risk
- The type of consequences (who or what is affected by the risk), illustrated by one of these 6 symbols:
 - "CONTROL": Aircraft handling or control may be affected
 - "NAV": Navigation may be affected
 - "GROUND PERSONNEL": Possibility of injury to ground personnel
 - "FLIGHT": it may not be possible to complete the flight, there may be a risk of diversion.
 - "AIRCRAFT": Possibility of damage to the aircraft
 - "PAX": Possibility of injury to passengers.
- A reference to the FCTM chapter, section, and/or paragraph, where the related explanations and recommendations (for prevention and/or recovery) are located.








RISK SYMBOLS

CONTROL	NAV	GROUND PERSONNEL	FLIGHT	AIRCRAFT	PAX
					


NORMAL OPERATIONS

Ident.: PIR-010-00005743.0001001 / 21 APR 08




Applicable to: ALL

Flight Phase	Risk	Consequences		Refer to FCTM
PREP	During takeoff briefing, the flight crew does not check that the FMS SID (including the constraints) is correct.	Erroneous trajectory		<i>Refer to NO-020 COCKPIT PREPARATION</i>
TAKEOFF	The flight crew calls out "THRUST SET" before reaching N1 value	Engine check not valid		<i>Refer to NO-050 Takeoff Roll</i>
CLIMB /DESC	The flight crew uses the V/S knob without setting a target	Climb or descent does not stop		
DESC	In managed descent, the flight crew uses the speed brakes, in an attempt to descend below the computed profile	Unless the aircraft is above the computed profile, the autothrust increases thrust to remain on the computed profile. The expected increased rate of descent will not be reached. In addition, fuel consumption will increase		<i>Refer to NO-080 GUIDANCE AND MONITORING</i>
DESC	The flight crew does not set the TERR ON ND switch to ON	Reduced situational awareness		<i>Refer to NO-080 PREFACE</i>
APPR	The flight crew activates approach phase without crosschecking with each other	The other flight crewmember may perceive the speed change as undue, and may react to it		<i>Refer to NO-010 COMMUNICATION</i>
APPR	The flight crew clears the F-PLN using the DIR TO or DIR TO RAD IN functions, although the aircraft is in radar vectoring	NAV mode is armed. If this mode setting is not relevant, it may lead to an erroneous trajectory		<i>Refer to NO-100 INITIAL APPROACH and Refer to NO-100 INTERMEDIATE APPROACH</i>

To be continued on next page

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PREVENTING IDENTIFIED RISKS PREVENTING IDENTIFIED RISKS
---	--



Continued from previous page

Flight Phase	Risk	Consequences		Refer to FCTM
APPR	The flight crew does not sufficiently monitor raw data	Any erroneous computation leads to an erroneous trajectory		Refer to NO-100 FINAL APPROACH Refer to NO-120 FINAL APPROACH
ILS APPR	Glide slope interception from above: G/S not rearmed	The aircraft descends through the glide slope axis, without intercepting it		Refer to NO-110 FINAL APPROACH
NPA APPR	When the aircraft reaches the minimum altitude, the flight crew sets the bird to ON and the AP to OFF, but does not set the FDs to OFF.	The FDs orders may not be correct below the minima.		Refer to OP-030 AUTOPILOT/FLIGHT DIRECTOR Refer to NO-120 REACHING THE MINIMA

SYSTEM OPERATIONS / FAILURES

Ident.: PIR-010-00005745.0001001 / 26 MAR 08

Applicable to: ALL









ATA	Risk	Consequences	Csqce type	Refer to FCTM
22	The flight crew uses the instinctive disconnect pushbutton on the thrust levers to disconnect autothrust, without reducing the Throttle Lever Angle (TLA)	Immediate and undue speed increase		Refer to OP-030 AUTOTHURST (A/THR)
22	Alpha floor/TOGA LOCK, with no disconnection of autothrust	TOGA thrust is maintained, with an undue speed increase, and may lead to overspeed		Refer to OP-030 AUTOTHURST (A/THR)

To be continued on next page


PREVENTING IDENTIFIED RISKS

PREVENTING IDENTIFIED RISKS





Continued from previous page

ATA	Risk	Consequences	Csqce type	Refer to FCTM
22	The flight crew does not use the correct knob to change heading or speed	Trajectory not correct		
22	The flight crew does not sequence the F/PLN	Erroneous computation (e.g. time, fuel) and trajectory		<i>Refer to NO-120 INTERMEDIATE APPROACH</i>
27	The flight crew does not select the speed after slat or flap failure	At takeoff: When flaps/slats are locked, if the flight crew does not select the current speed, the aircraft continues to accelerate and possibly exceeds MAX Speed		<i>Refer to AO-027 ABNORMAL FLAPS/SLATS CONFIGURATION</i>
		In approach: When flaps/slats are locked, if the flight crew does not select the current speed, the aircraft continues to decelerate down to a speed that is not consistent with the real aircraft configuration		
27/32	In the case of flight with slats/flaps extended or landing gear extended, the flight crew takes into account the FMS predictions	Erroneous computation (i.e. time, fuel), because the FMS does not take into account the abnormal configuration		<i>Refer to AO-027 ABNORMAL FLAPS/SLATS CONFIGURATION</i>
28	The flight crew does not check fuel before fuel crossfeed	Fuel loss		<i>Refer to AO-028 FUEL LEAK</i>
34	Error in the use of RMP	Loss of transmission to ATC due to an erroneous manipulation (particularly when SEL is on)		
34	The flight crew performs the TCAS procedure, but does not set the FDs to OFF	The autothrust mode remains in THR CLB or THR DES, which are not the appropriate modes. This may lead to flight control protection activation		<i>Refer to SI-060 OPERATIONAL RECOMMENDATIONS</i>

To be continued on next page

 A318/A319/A320/A321 FLIGHT CREW TRAINING MANUAL	PREVENTING IDENTIFIED RISKS PREVENTING IDENTIFIED RISKS
---	--

Continued from previous page

ATA	Risk	Consequences	Csqce type	Refer to FCTM
34	The flight crew selects ADR to OFF using the ADIRS rotary selector, instead of the ADR pushbutton	Irreversible loss of redundancy (the associated IR is lost, and cannot be recovered until the end of the flight)		<i>Refer to AO-034 ADR/IRS FAULT</i>
70	In the case of an engine failure after takeoff, the flight crew does not stabilize the aircraft on the flight path before performing ECAM actions	Performing the ECAM actions before the aircraft is stabilized on the flight path, reduces efficiency due to the PF's high workload, and may lead to a trajectory error		<i>Refer to AO-020 ENGINE FAIL- URE AFTER V1</i>
70	In the case of an engine failure in cruise, the flight crew presses the EO CLR key on the MCDU	Pressing the EO CLR key on the MCDU is an irreversible action that leads to the loss of single engine computation (discrepancy between the computation and real aircraft status)		<i>Refer to AO-020 ENGINE FAIL- URE DURING CRUISE</i>
80	For EMERGENCY DESCENT, the flight crew turns but does not pull the knobs, or does both, but not in the correct sequence, with no FMA crosscheck	The flight crew does not detect that the descent is not engaged. Delayed descent leads to limited oxygen for passengers		<i>Refer to OP-030 AUTOPI- LOT/FLIGHT DIRECTOR</i>



Intentionally left blank