


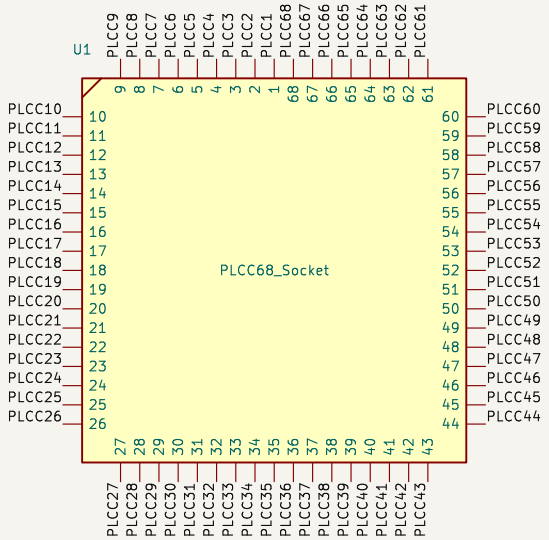


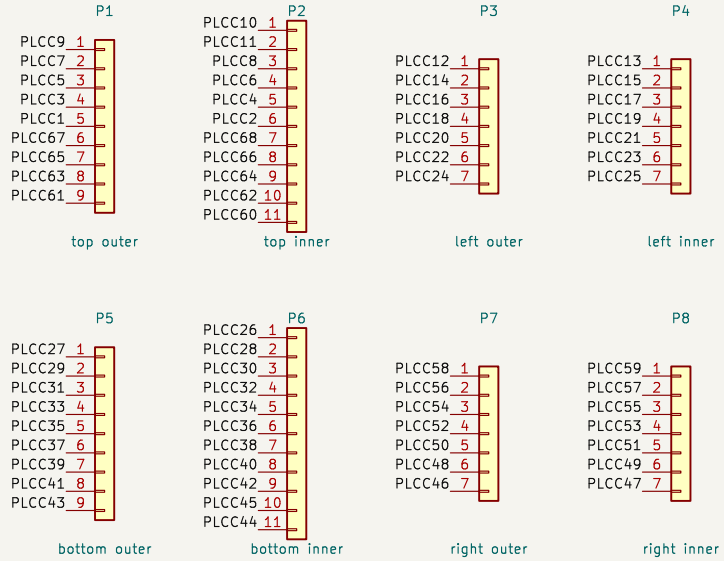




DIP48 plug, corner pins only: they power the board and hold it in the ZIF socket. Pins 1/48 GND, 24/25 VCC; feed them from mezzanine J8/J9 through J3/J4. Patch P1–P8 to mezzanine J3/J4.

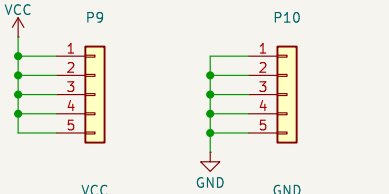

Power helper: patch the CPU supply pins here.



PLCC68 to DIP48 patch adapter for the mezzanine board

Tadashi G. Takaoka

Sheet: /
File: plcc-adapter.kicad_sch

Title: BionicPLCCAdapter

Size: A4	Date: 2026-10-17	**Rev: 1**
KiCad E.D.A. 9.0.8		Id: 1/1