Safe measurement, indication and control of rotational speed

RT STROBE 12000 LED

Outstanding light intensity with intelligent LED-technology for XXL-web widths

- Low-wear technology with LEDs
- light intensity and image sharpness adjustable
- Homogeneous and large area illumination
- Applicable for web width of approx. 1200 mm

High-performance stationary LED-stroboscope with powerful light output and homogenous illumination for XXL-web widths

High light output Due to the configuration with 480 high-perfomance LEDs, the RT STROBE 12000 LED offers a powerful light intensity. The large, homogeneous illumination surface delivers superb results even at difficult light conditions, making the RT STROBE 12000 LED suitable for a very wide range of measurement, observation and inspection functions. It is especially suitable for demanding applications, such as those in the printing industry.

High focus With an adjustable flash duration from 1 - 1000 µ seconds, you will easily find the best combination between light intensity and sharp images for every application.

Flexible adjustment to all applications Alternatively, the stroboscope can be controlled directly by the trigger signal of your system without the need for additional control units or by various RT STROBE control devices. When using these trigger options simultaneously, you can easily alternate between the signal inputs by using the switch on the reverse side of the device.

Additional control options The RT STROBE control model range includes two devices for varying the control of the RT STROBE 12000 LED:

RT STROBE eco control – a simple and inexpensive unit for controlling flash frequency. You simply insert this small control unit into one of the sockets on the reverse side of the device.

RT STROBE control – for adjusting the flash frequency, phase shift, delay time and trigger divider. This unit is connected to the stroboscope by cable and provides the convenience of remote control even if the stroboscope within your machine is difficult to access.

Our specialists manufacture this product made-to-order for you.

RT STROBE 12000 LED

Technical data

General parameters	
Frequency range	0 … 120,000 FPM (flashes per minute)
Power supply	24 VDC (+/- 10 %) / 40 W
	DIN 41524 5-pin standard plug
External trigger input	3 … 30 V / max. 5 mA
	potential-free optocoupler
	DIN 41524 5-pin standard plug
	Uout = Uin, max. 200 mA
	switchable trigger input
Trigger output	for parallel connection
Flash parameters	
Light intensity/sharpness	adjustable with turning knob
Light intensity single flash	approx. 1.4 Mega-Lux / 300 mm / 12″
Light intensity	14,000 Lux / 300 mm / 12″
Illumination area	300 mm x 1200 mm / 12″ x 47″
Flash colour	approx. 5,000 … 8,300 K
Housing	
Material	Aluminium
Dimensions	948 x 130 x 112 mm / 37.3 x 5.1 x 4.4″
Weight	4,200 g
Ambient conditions	
Ambient temperature	0 … 40 °C (32 … 104 °F)
Storage temperature	-25 … 70 °C (-13 … 158 °F)
Humidity	max. 95 % not condensing
Certifications	
Certificate of CE conformity	

Scope of delivery

A6-12255 (Starter-Set): RT STROBE 12000 stroboscope, power supply unit, RT STROBE eco control, operating instructions, 1 plug for connection of trigger input and/or power.

Accessories (optional)

Tripod/wall mounting, power supply unit, plug for trigger signal/supply connection, Stroboscope control units: RT STROBE control or RT STROBE eco control.

Illumination level

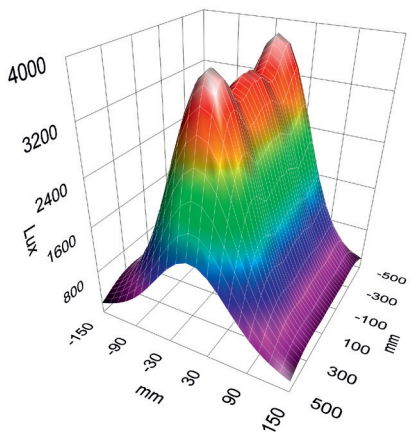

RHEINTACHO Messtechnik GmbH
Waltershofener Straße 1
79111 Freiburg · Germany
Telefon +49 (0)761 45 13 0
info@rheintacho.com
www.rheintacho.com

Status November 2025
P04211B_Rev.A

We reserve the right to make technical changes.