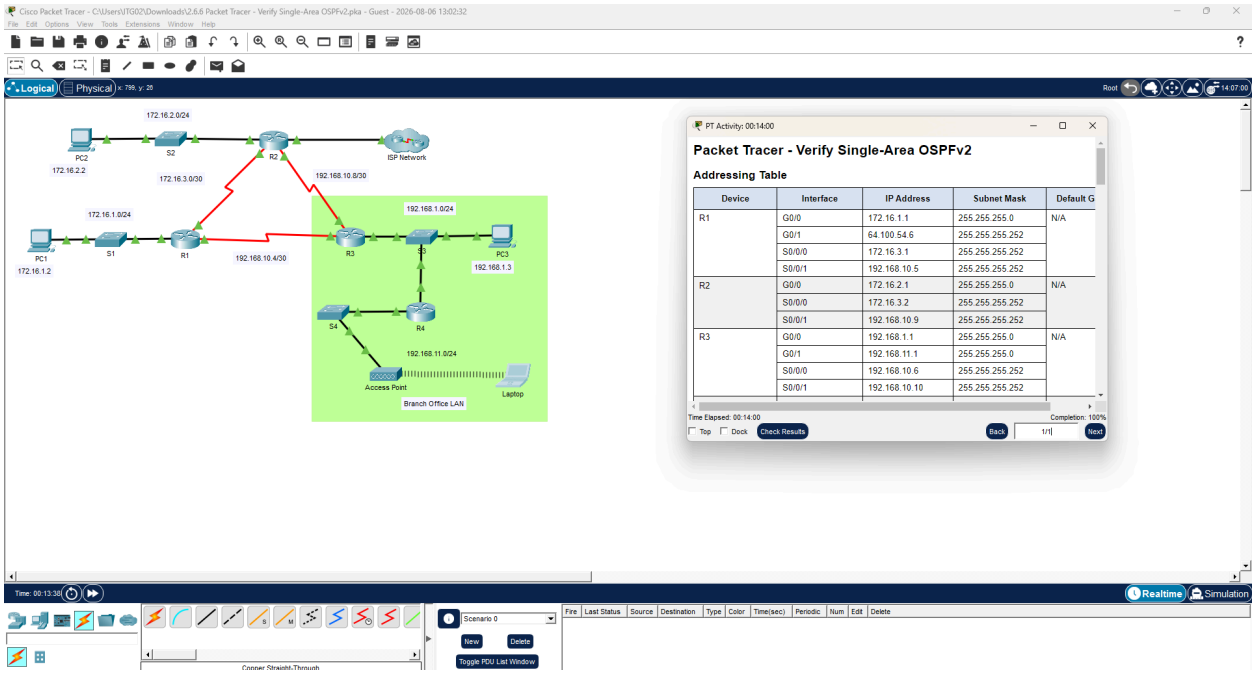


Topology

R1, R2, and R3 form the existing branch/enterprise OSPFv2 domain (single Area 0), continuing from the previous activity in this series. R2 connects out to the ISP Router and holds the static default route, which it propagates into OSPF. R3 shares its LAN segment (192.168.1.0/24) with router R4 through switch S3 - R3 and R4 become OSPF neighbors across that Ethernet segment. R4's second interface (G0/0/1) is the new Branch Office LAN added in Part 2 of this activity, serving the Laptop via DHCP.

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	G0/0	172.16.1.1	255.255.255.0	N/A
R1	G0/1	64.100.54.6	255.255.255.252	N/A
R1	S0/0/0	172.16.3.1	255.255.255.252	N/A
R1	S0/0/1	192.168.10.5	255.255.255.252	N/A
R2	G0/0	172.16.2.1	255.255.255.0	N/A
R2	S0/0/0	172.16.3.2	255.255.255.252	N/A
R2	S0/0/1	192.168.10.9	255.255.255.252	N/A
R3	G0/0	192.168.1.1	255.255.255.0	N/A
R3	G0/1	192.168.11.1	255.255.255.0	N/A
R3	S0/0/0	192.168.10.6	255.255.255.252	N/A

R3	S0/0/1	192.168.10.10	255.255.255.252	N/A
R4	G0/0/0	192.168.1.2	255.255.255.0	N/A
R4	G0/0/1	192.168.11.1	255.255.255.0	N/A
ISP Router	NIC	64.100.54.5	255.255.255.252	N/A
PC1	NIC	172.16.1.2	255.255.255.0	172.16.1.1
PC2	NIC	172.16.2.2	255.255.255.0	172.16.2.1
PC3	NIC	192.168.1.2	255.255.255.0	192.168.1.1
Laptop	NIC	DHCP	DHCP	DHCP