



- 注
- バリ、反り、変形の無きこと。抜きテーパは公差内であること
  - 指示なきイジェクトピン、逃げ、ゲート位置、PL、CAV番号、駒の割り方はレイアウト図(500723)を参照とする
  - 寸法測定箇所①～⑫
  - 機能検査⑬
- ⑬ Plug Frame (5th LCY) A5TH3-011\*\*を挿入嵌合でき、かつ嵌合後に両部品に割れなきこと
- 5.材料 PBT Nanya 1403G6 GNC6 色:Black (7101)  
難燃性:UL94 V-0  
リサイクル材は、承認のうえ使用可とする。
- 6.検査については、プラスチック成形品検査規格 (JDAA-11-06-0010)とする
- 7.RoHS,REACH,IEC62474 対応であること
- 8.色については 色見本あるいはサンプルにて規定する
- 9.記入なき寸法は3D又は2Dデータ参照のこと
- 10.指示無き0.5以下の角Rと面取りの公差は"±0.1"

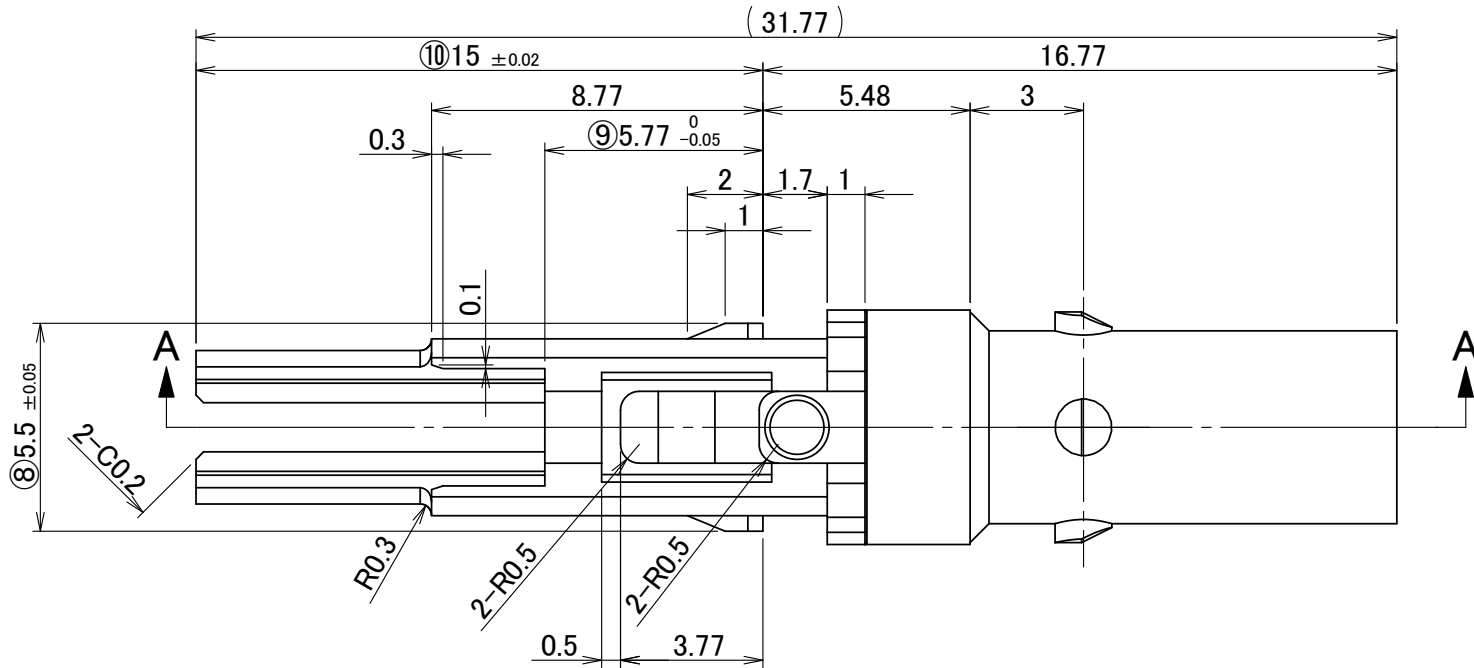

REVISION		
REV	DATE	DESCRIPTION
G	2023/08/22	寸法公差緩和, 寸法測定箇所の追加 Relax dimension tolerance Add the dimension measurement points

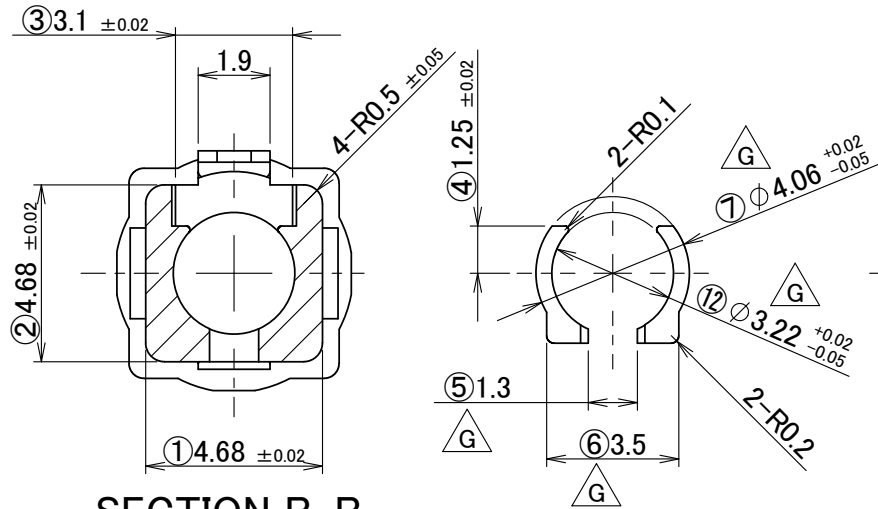

SECTION B-B

- Notes
- No burr, warping or deformation.  
Draft taper to be within tolerances.
  - Reffer to the Layout Drawings(500723) about position of EP,Groove, gate position,parting line(PL),CAV number position.
  - Dimension measurement points ①～⑫
  - Function tests⑬
- ⑬ It can be assembled with PLUG FRAME (5th LCY) A5TH3-011\*\* without cracks on either part.
5. Material: PBT Nanya 1403G6 GNC6 Color: Black (7101)  
Nonflammability :UL94 V-0  
Recycle resin can be used with approval.
- 6.The inspection should be compatible with JDAA-1106-0010.
7. RoHS, REACH and IEC 62474 compliant.
8. The sample or product color should be judged according to the color swatch.
9. Unspecified dimensions should follow the 3D or 2D data.
- 10.Radius & Chamfer of 0.5 or less without instruction is tolerance "±0.1"

