


φ 1.2 Boot

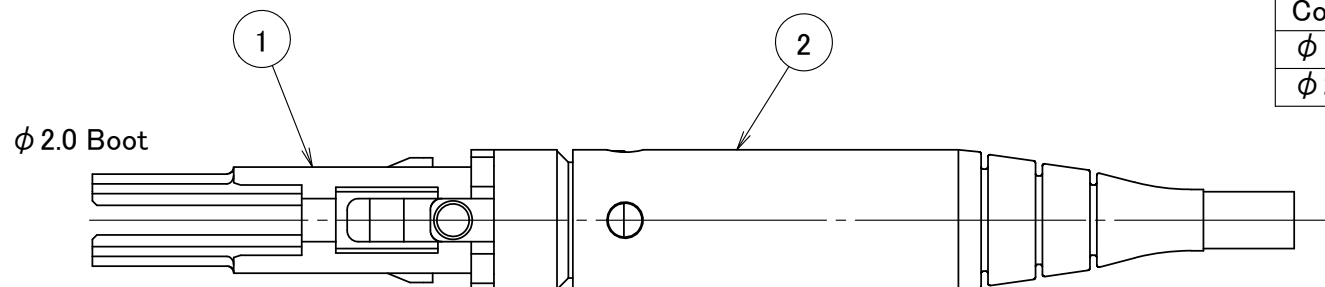


φ 2.0 Boot

Table 1. Detail of Boot

| Code | Size | Title | Drawing No. |
|-------|------|---------------------|-------------|
| φ 1.2 | Boot | φ 1.2 (5th SCY/LCY) | A5TH3-052G3 |
| φ 2.0 | Boot | φ 2.0 (5th SCY/LCY) | A5TH3-072D3 |

Table 2. Detail of Boot Color

| Kind of Fiber | Boot color |
|---------------|------------|
| APC SM | Green |
| UPC SM | Blue |
| MM62.5 | Black |
| MM10G | |

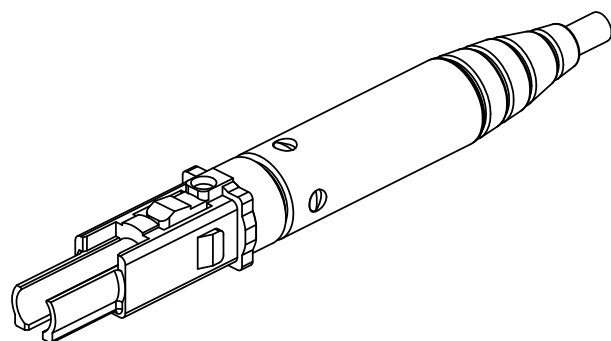

| 2 | Boot Cord (5th) | See Table 1 | - | - | 1 | - |
|--|-------------------|--------------------------|----------------------------------|-------------------------------------|---|-----------|
| 1 | Stop Ring LCY 5th | A5TH3-046G3 | - | - | 1 | - |
| No. | Title | Drawing No. | REV. | Material | Qty. | Remark |
| RADIUS & CHAMFER TOLERANCE (Unless otherwise stated) | | MATERIAL --- | DRAWING N.Yoshida | CHECK 光機開 '24.08.09 松田 | TITLE Boot and Stop Ring 5th LCY Cord [Kind of Fiber] [Cord Size] DWG No. A5TH1-017A4 | |
| DIMENSION mm | DEVIATION deg. | | | | | |
| 0.5 < , ≤ 3 | ± 0.2 | | | | | |
| 3 < , ≤ 6 | ± 0.5 | | | | | |
| 6 < , | ± 1.0 | SURFACE TREATMENT --- | DESIGN 光機開 '24.08.09 西口 | APPROVAL 光機開 '24.08.09 佐々木 | INITIAL DATE : 2024/08/08 DRAWING: N.Yoshida | |
| ANGLE TOLERANCE (Unless otherwise stated) | | | | | | |
| DIMENSION mm (Shorter side length) | DEVIATION deg. | | | | | |
| ≤ 10 | ± 1° | | | | | |
| 10 < , ≤ 50 | ± 0.5° | ≤ 6 | ± 0.1 | Fujikura Ltd. | UNIT mm | SCALE 5:1 |
| 50 < , ≤ 120 | ± 0.3° | 6 < , ≤ 30 | ± 0.2 | | | |
| 120 < , ≤ 400 | ± 0.15° | 30 < , ≤ 120 | ± 0.3 | | | |
| 400 < , | ± 0.1° | 120 < , ≤ 400 | ± 0.5 | | | |
| | | 400 < , ≤ 1200 | ± 0.8 | | | |