
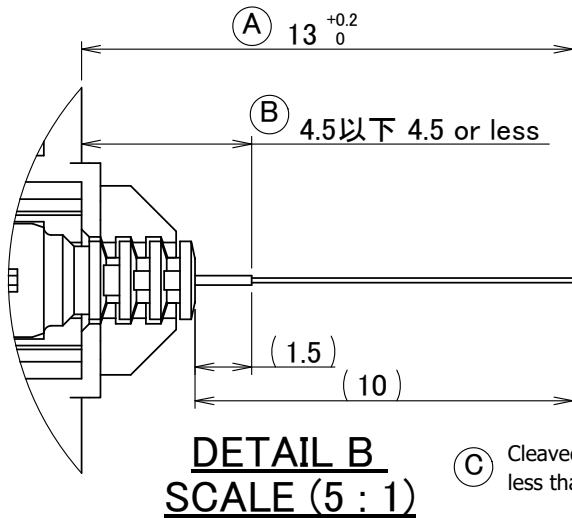


REVISION		
REV	DATE	DESCRIPTION
B	2024/08/08	図面形態大幅変更 / Major change in drawing format

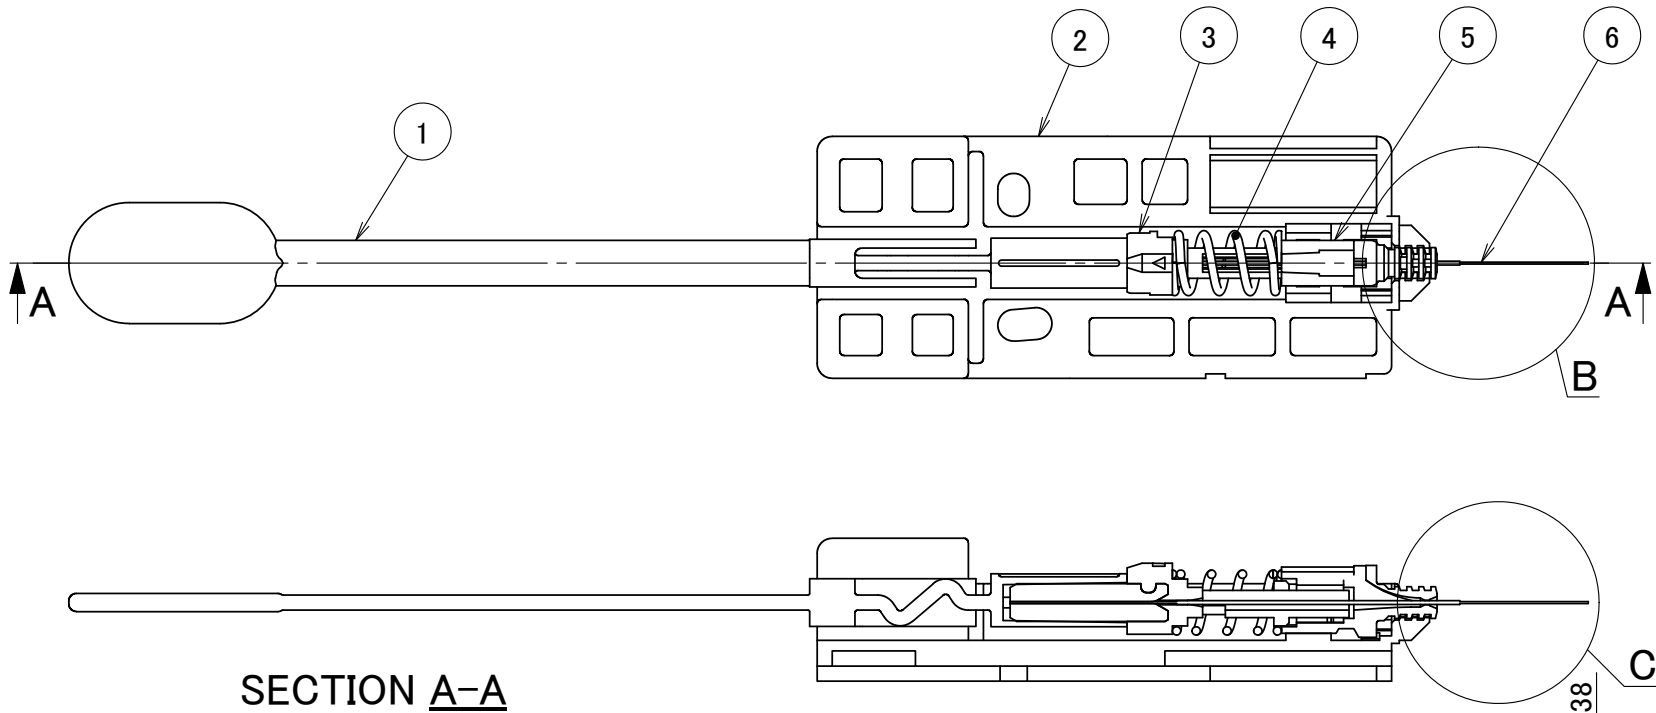

SECTION A-A

Table 2. Detail of Pre-installed fiber

Polishing type	Kind of Fiber	Drawing No.	Fiber Name
APC	SM	JFT-03746	FutureGuide-Ace 12 FIBER RIBBON-PREMIUM
UPC	MM62.5	FBR00407	FIBER,CORNING,INFINICOR CL300 62.5/125 OM1,200/600 BW,300/550 LINK LIMIT,NATURAL
	MM10G	FBR00396	FIBER,DRAKA,MAXCAP BENDBRIGHT MM50 OM4,3500/500 BW,NATURAL


DETAIL C  
SCALE (5 : 1)

Table 1. Detail of Flange



Polishing type	Title	Drawing No.
APC	Flange (5th APC Φ2.5) OM	A5TH3-022C3
UPC	Flange (5th UPC Φ2.5) OM	A5TH3-023C3

- 注 / Notes
- 1.寸法測定箇所 ① ~ ⑤  
Dimension measurement tests ① ~ ⑤
  - 2.③フランジの指定以外の外周面に353NDが付いていないこと  
353ND must not adhere on unspecified peripheral surface of ③Flange

APC 端面 / End face  
SCALE (5 : 1)

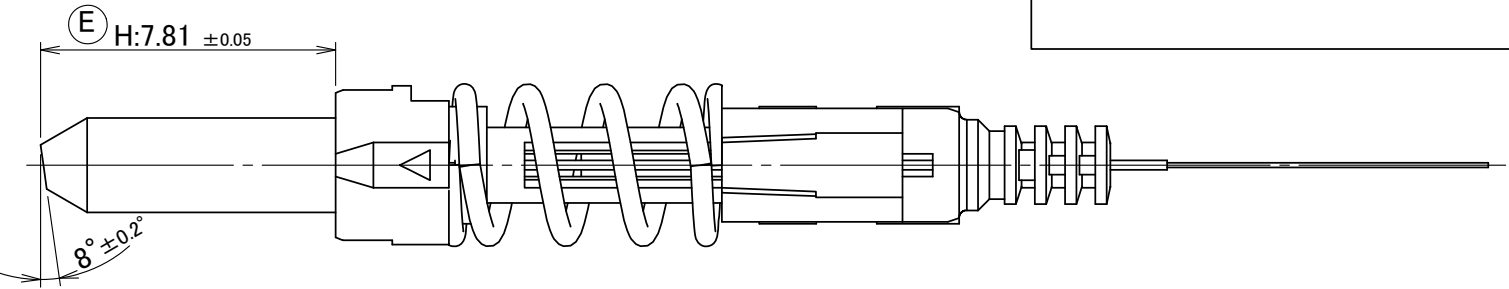

UPC 端面 / End face  
SCALE (5 : 1)

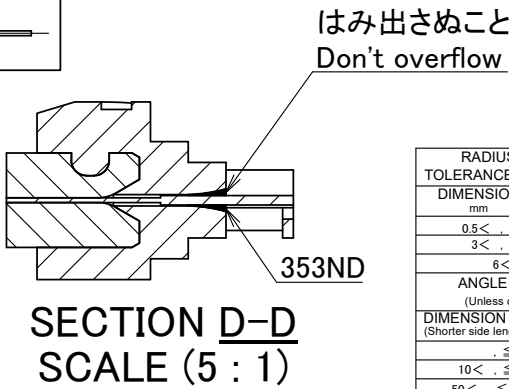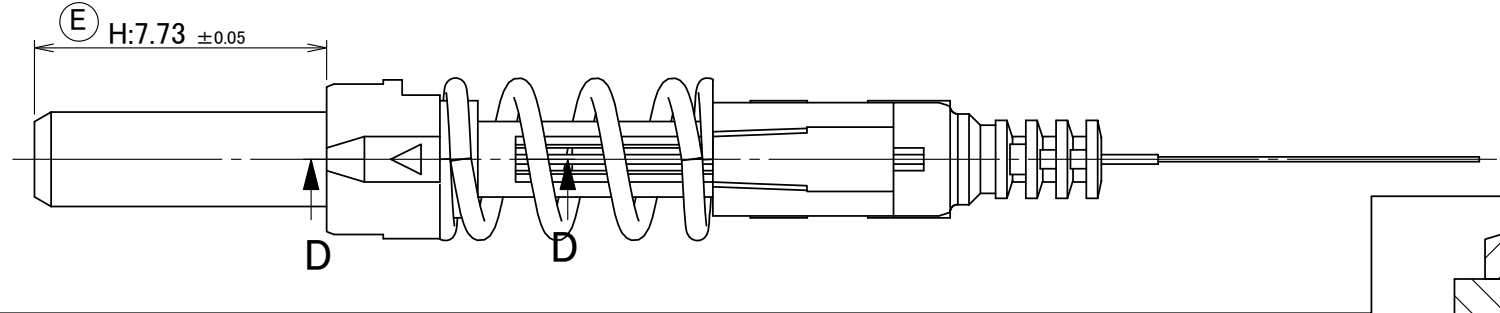

6	Pre-Installed Fiber	See Table 2	-	-	1	-
5	Slider (5th SCY/LCY)	A5TH3-043E3	-	-	1	-
4	Spring (5th SCY)	A5TH3-003B4	-	-	1	-
3	Flange	See Table 1	-	-	1	-
2	Connector Holder (5th SCY/LCY)	A5TH3-014G3	-	-	1	-
1	Lanyard Cap (5th)	A5TH3-015E3	-	-	1	-
No.	Title	Drawing No.	REV.	Material	Qty.	Remark
RADIUS & CHAMFER TOLERANCE (Unless otherwise stated)			DRAWING		CHECK	TITLE
DIMENSION mm	DEVIATION deg.		N.Yoshida		光機開 '24.08.09 松田	Connector Holder Assy 5th SCY Cord AFL [Kind of Fiber] [Polishing type]
0.5< , ≤3	±0.2					DWG No.
3< , ≤6	±0.5					A5TH1-011B3
6< ,	±1.0					DATE : 2022/06/21
ANGLE TOLERANCE (Unless otherwise stated)			DESIGN		光機開 '24.08.09 西口	INITIAL
DIMENSION mm	DEVIATION deg.				光機開 '24.08.09 佐々木	DATE : 2022/06/21
≤10	±1°					DRAWING: N.Yoshida
10< , ≤50	±0.5°					UNIT mm
50< , ≤120	±0.3°					SCALE 2:1
120< , ≤400	±0.15°					SHEET 1/1
400< ,	±0.1°					Fujikura Ltd.
SURFACE TREATMENT			APPROVAL			
SIZE TOLERANCE (Unless otherwise stated)						
DIMENSION mm	DEVIATION mm					
≤6	±0.1					
6< , ≤30	±0.2					
30< , ≤120	±0.3					
120< , ≤400	±0.5					
400< , ≤1200	±0.8					