

New Jersey Semi-Conductor Products, Inc.


20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081

NPN SMALL SIGNAL GENERAL PURPOSE AMPLIFIER AND SWITCH

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

MECHANICAL DATA

CASE: JEDEC TO-18
TERMINAL CONNECTIONS:
Lead 1 Emitter Lead 2 Base
Lead 3 Collector (Electrically connected to case)

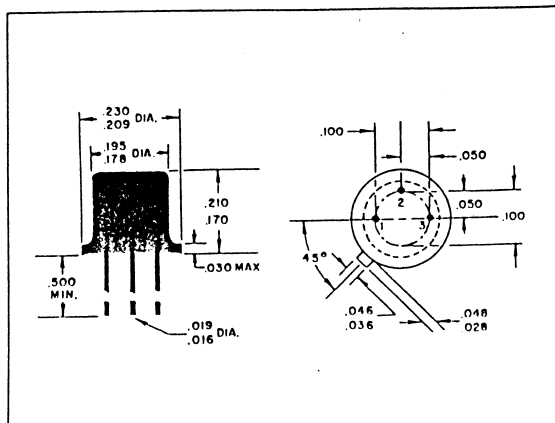

2N2222

ELECTRICAL DATA

ABSOLUTE MAXIMUM RATINGS:

Collector to Base Voltage V_{CBO}	60 volts
Collector to Emitter Voltage V_{CEO}	30 volts
Emitter to Base Voltage V_{EBO}	5 volts
Total Device Dissipation	
@ Case Temperature 25° C	1.8 watts
@ Case Temperature 100° C	0.9 watts
@ Free Air Temperature 25° C	0.5 watts
Junction Temperature (Operating)	-65° C to +175° C
Storage Temperature	-65° C to +300° C

ELECTRICAL CHARACTERISTICS: @25° C (unless otherwise noted)

PARAMETER	SYM.	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Collector to Base Breakdown Voltage	BV_{CBO}	$I_C=10 \mu A$	60	volts
Collector to Emitter Breakdown Voltage ▲	BV_{CEO}	$I_C=10 \text{ mA}$	30	volts
Emitter to Base Breakdown Voltage	BV_{EBO}	$I_E=10 \mu A$	5	volts
Collector Cutoff Current	I_{CBO1}	$V_{CB}=50 \text{ V}$	10	nA
Collector Cutoff Current	I_{CBO2}	$V_{CB}=50 \text{ V}, T_A=+150^\circ \text{ C}$	10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=3 \text{ V}$	10	nA
DC Current Gain	h_{FE1}	$V_{CE}=10 \text{ V}, I_C=0.1 \text{ mA}$	35	55
DC Current Gain	h_{FE2}	$V_{CE}=10 \text{ V}, I_C=1.0 \text{ mA}$	50	100
DC Current Gain ▲	h_{FE3}	$V_{CE}=10 \text{ V}, I_C=10 \text{ mA}$	75	150
DC Current Gain ▲	h_{FE4}	$V_{CE}=10 \text{ V}, I_C=150 \text{ mA}$	100	200	300
DC Current Gain ▲	h_{FE5}	$V_{CE}=10 \text{ V}, I_C=500 \text{ mA}$	30	65
DC Current Gain ▲	h_{FE6}	$V_{CE}=1 \text{ V}, I_C=150 \text{ mA}$	50	90
Collector to Emitter Saturation Voltage ▲	$V_{CE(sat) 1}$	$I_C=150 \text{ mA}, I_B=15 \text{ mA}$	0.2	0.4	volts
Collector to Emitter Saturation Voltage ▲	$V_{CE(sat) 2}$	$I_C=500 \text{ mA}, I_B=50 \text{ mA}$	0.5	1.6	volts
Base to Emitter Saturation Voltage ▲	$V_{BE(sat) 1}$	$I_C=150 \text{ mA}, I_B=15 \text{ mA}$	1.1	1.3	volts
Base to Emitter Saturation Voltage ▲	$V_{BE(sat) 2}$	$I_C=500 \text{ mA}, I_B=50 \text{ mA}$	1.5	2.6	volts
High Frequency Small Signal Current Gain	h_{fe}	$V_{CE}=20 \text{ V}, I_C=20 \text{ mA}, f=100 \text{ mc}$	2.5	3.5
Collector Capacitance	C_{ob}	$V_{CB}=10 \text{ V}, I_E=0 \text{ mA}$	7	8	pf
Current Gain-Bandwidth Product	f_t	$V_{CE}=20 \text{ V}, I_C=20 \text{ mA}, f=100 \text{ mc}$	250	350	mc
Real Part of Input Impedance	$Re(h_{ie})$	$V_{CE}=20 \text{ V}, I_C=20 \text{ mA}$	60	ohms