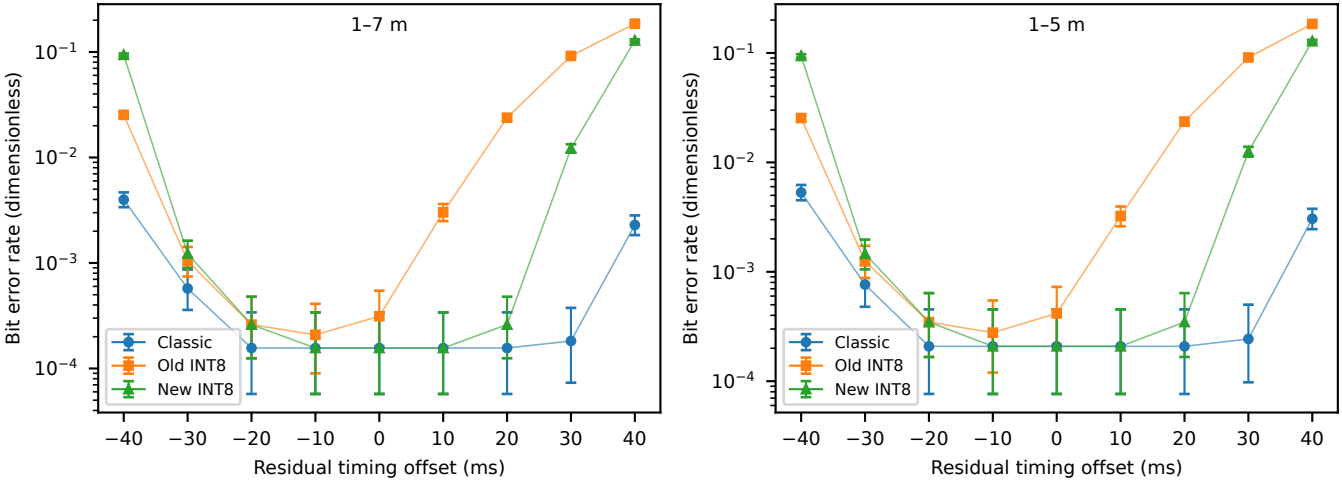
1–7 m
1–5 m
Bit error rate (dimensionless)
10^{-1}
10^{-2}
10^{-3}
10^{-4}
Classic
Old INT8
New INT8
−40
−30
−20
−10
0
10
20
30
40
Residual timing offset (ms)
95% CP intervals; open markers: zero errors at upper bound