

Battery System

ESS-LB5-W01



Overview

The low-voltage wall-mounted battery system includes a battery unit ESS-LB5-W01 and a hanging board. It can be used in conjunction with energy storage inverters or photovoltaic energy storage integrated machines for storing and releasing electrical energy.

Features


- Utilizes lithium iron phosphate batteries, providing high safety and long lifespan.
- Equipped with a self-developed battery management system with protective functions like over-discharge, overcharge, overcurrent, and temperature protection.
- Employs high-precision algorithms for SOC (State of Charge) and SOH (State of Health) estimation, ensuring more accurate calculations.
- Modular design, supports 1 to 16 expansions, adaptive control strategies. Suited to residential and commercial applications for increasing the self-consumption ratio.
- Industrial-grade wide temperature range to withstand high and low temperature environments.
- Automotive-grade anti-interference design to withstand strong and complex electromagnetic environments.
- Equipped with fuses for electrical safety protection.
- Support wall-mounted, saving installation space.
- Abundant and comprehensive fault diagnosis and protection functions provide timely protection and accurate troubleshooting.

Specifications

Model	ESS-LB5-W01
Electrical	
Cell Type	LFP (LiFePO4)

Rated Energy	5.12 kWh
Rated Capacity	100 Ah
Rated Voltage	51.2 V
Voltage Range	43.2 V to 58.4 V
Rated Charge Current	50 A
Max Charge Current	50 A
Rated Discharge Current	50 A
Max Discharge Current	50 A
Cycle Life	≥ 6000 (25±2 °C, 90%DOD, 0.5 C/0.5 C, 70%EOL)
Communication	CAN
Basic Parameters	
Battery Unit Dimensions	420 (W)*145 (D)*580 (H) mm
Battery Unit Weight	45 kg
Cooling	Passive cooling
Certificates	UN38.3 / MSDS etc.
Ingress Protection	IP20
Installation Style	wall-mounted
Operating Environment	
Operating Temperature	Charging: 0 °C to 55 °C Discharging: -20 °C to 55 °C
Storage Temperature	-20 °C to 60 °C
Operating Humidity	20% to 90%, RH (non-condensing)
Altitude	≤ 2000 m
Accessories	
Hanging Board	Hanging Board ×1; Screw×10
Inverter Cable Package	PCS communication cable×1

Dimensions

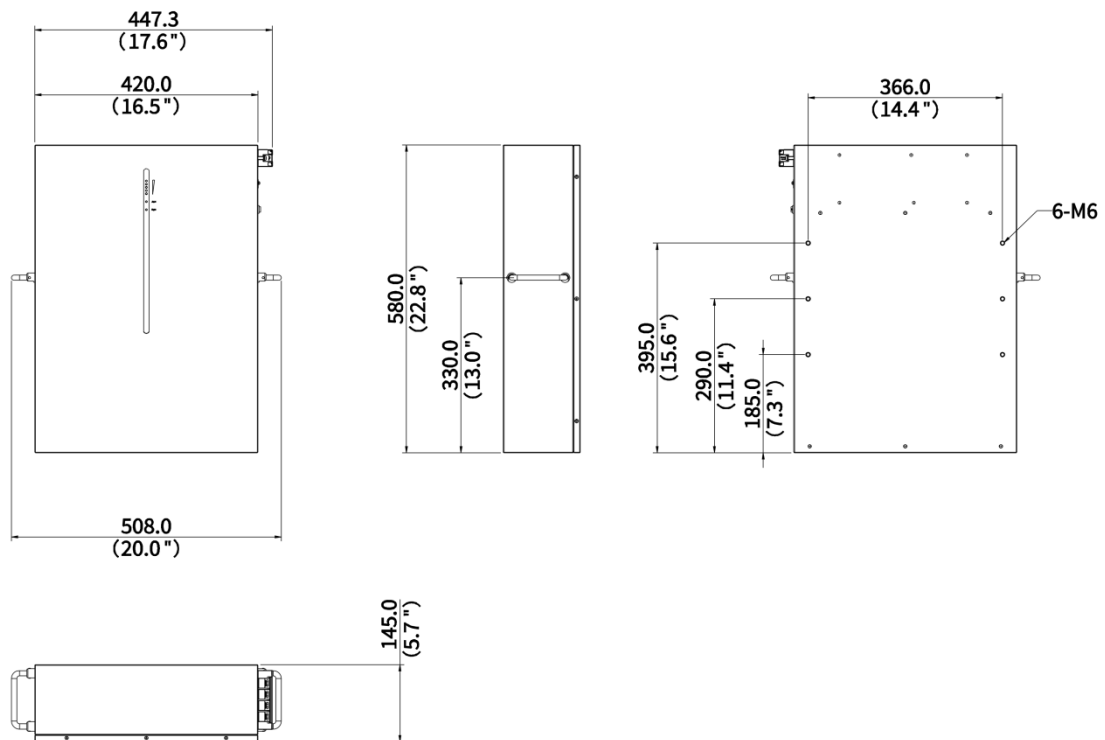

Ordering Info

Product Model	Description
ESS-LB5-W01	Battery System (Wall-mounted Battery Unit, LiFePO4, 5.12kWh, 100Ah, 51.2V)

HopeTrek Innovations Co., Ltd.

Room 57, 3/F, Block A, East Sun Industrial Centre, 16 Shing Yip Street, Kwun Tong, Kowloon, Hong Kong

Email: info@hopetrek.com.

www.hopetrek.com

Product specifications and availability are subject to change without notice.