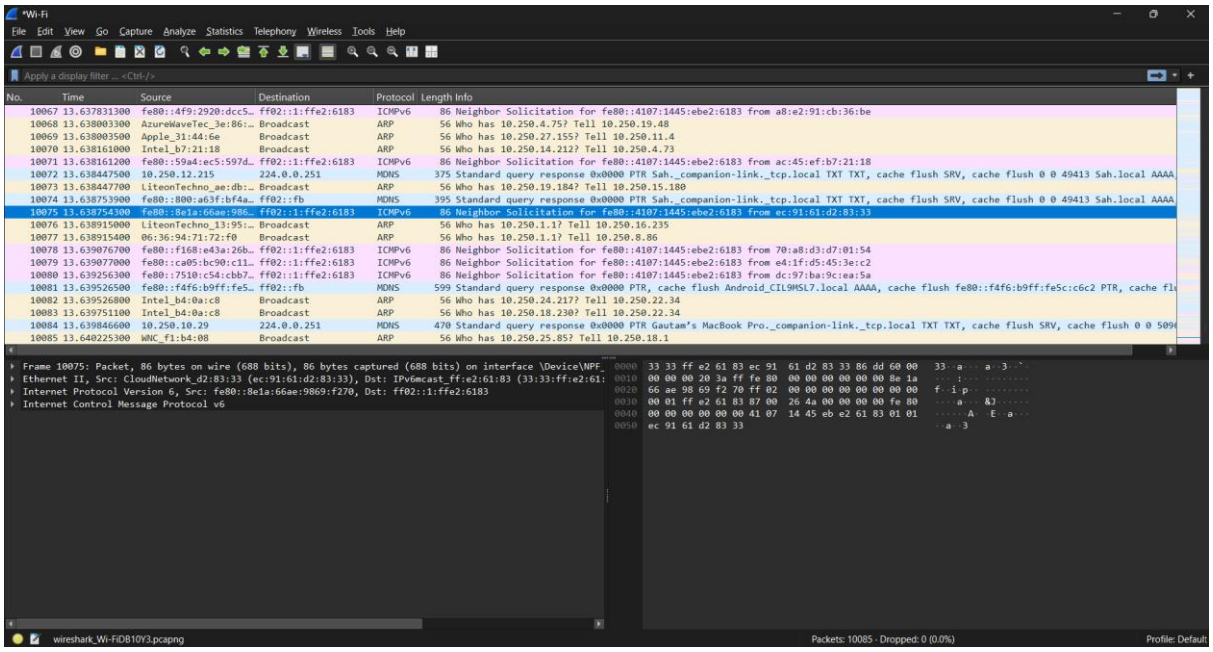
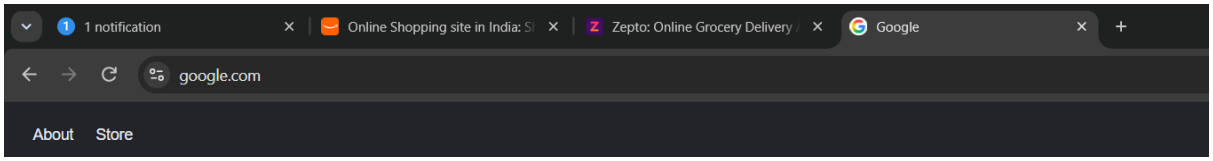
Select your network interface

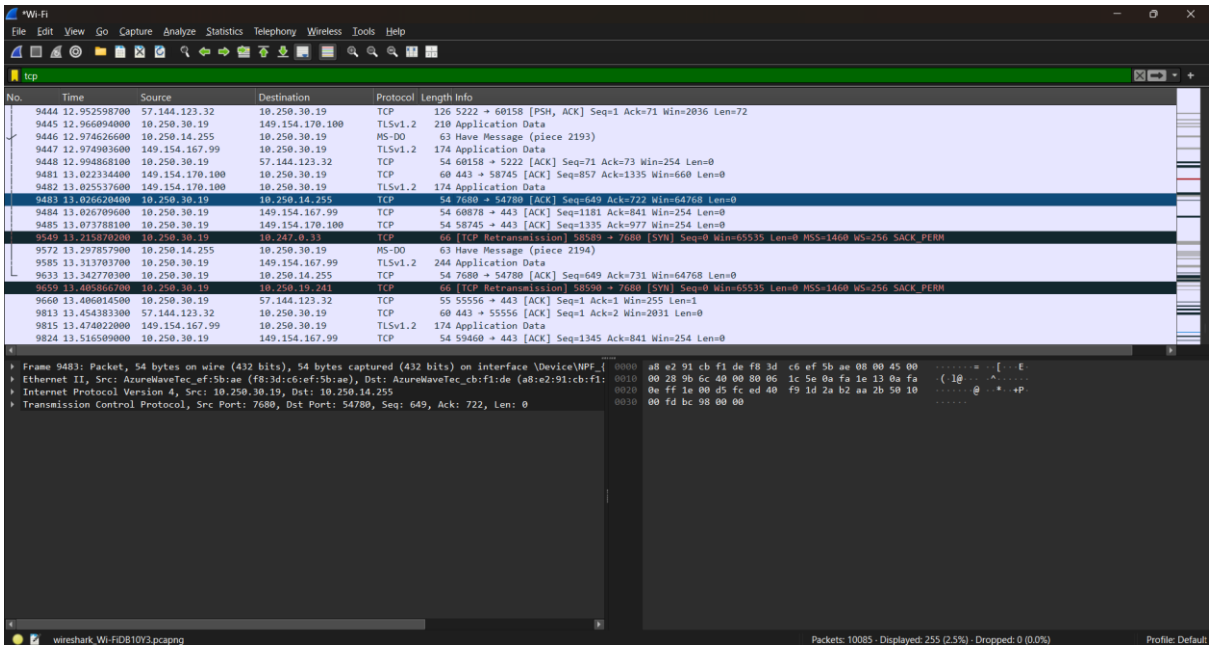


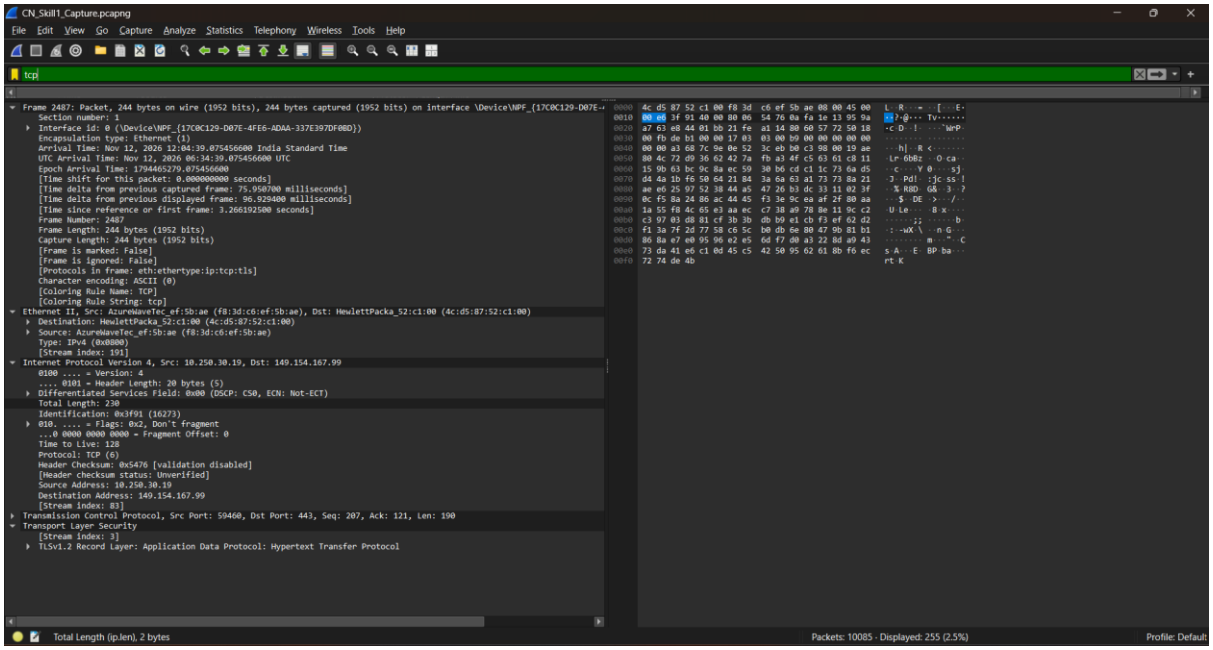
Generate network traffic



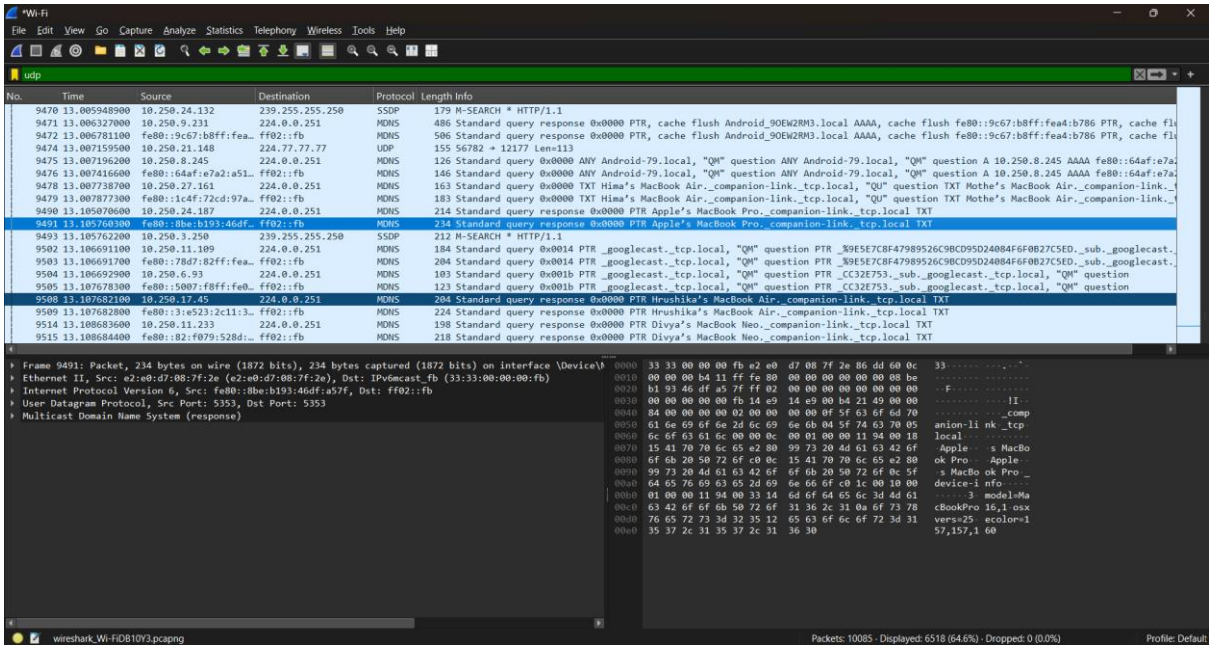
Apply display filters

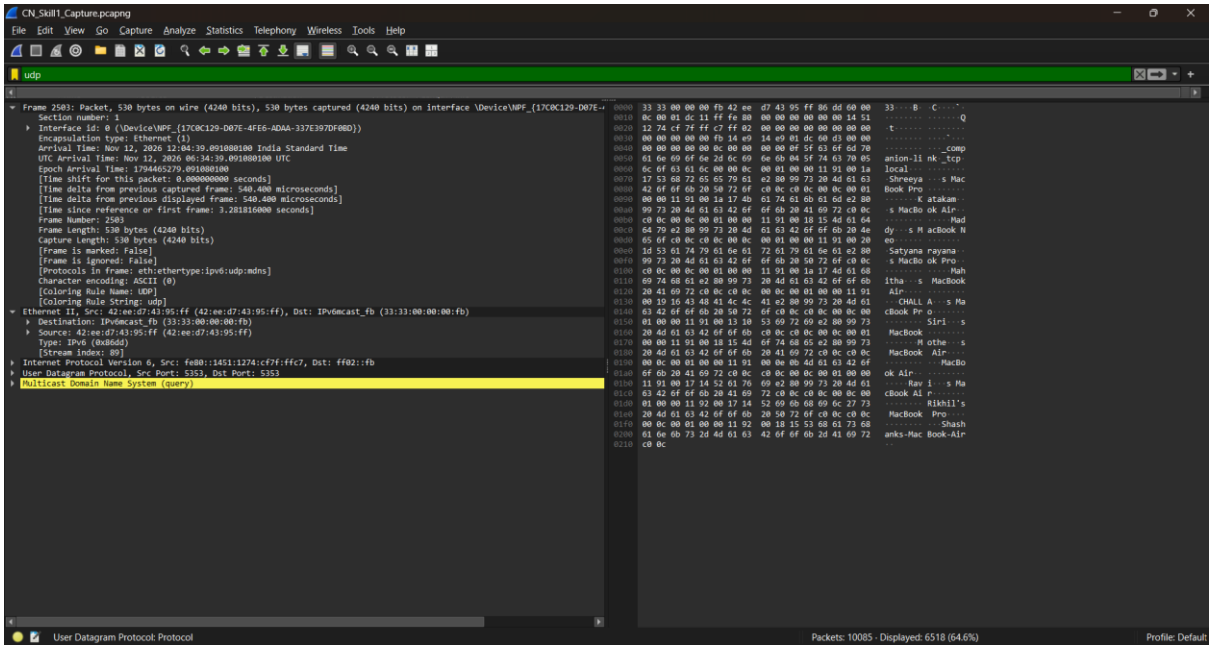
tcp



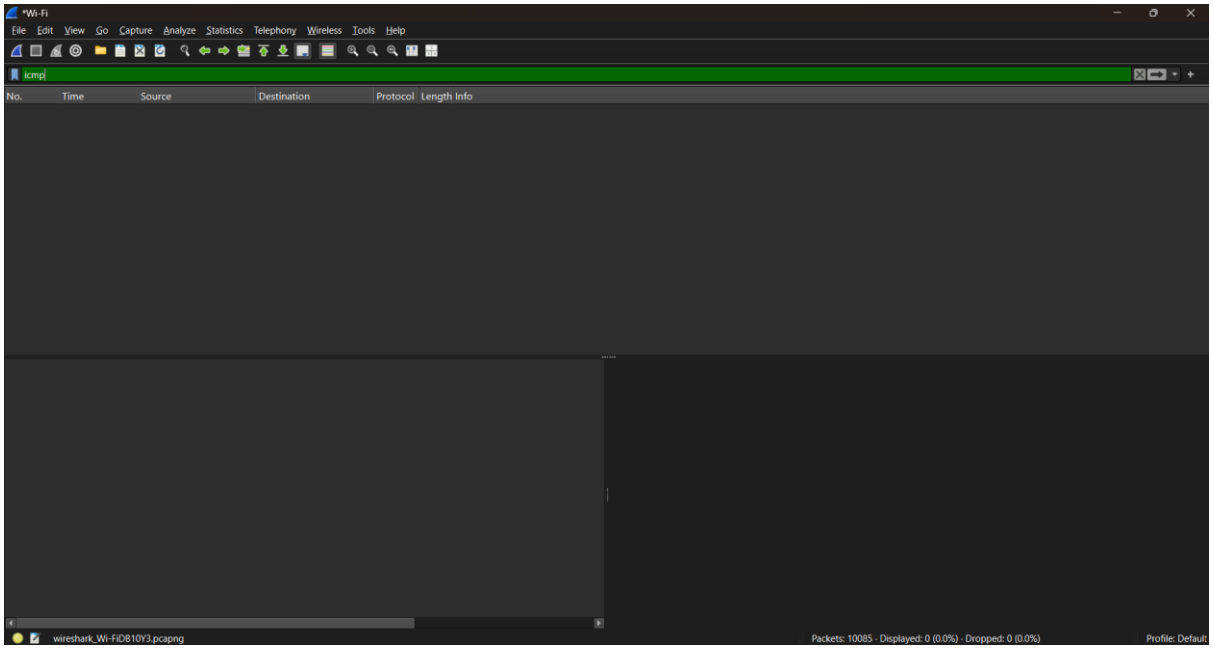

CN_Skill1_Capture.pcapng
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp
Total Length (ip.len), 2 bytes
Packets: 10085 · Displayed: 255 (2.5%)
Profile: Default

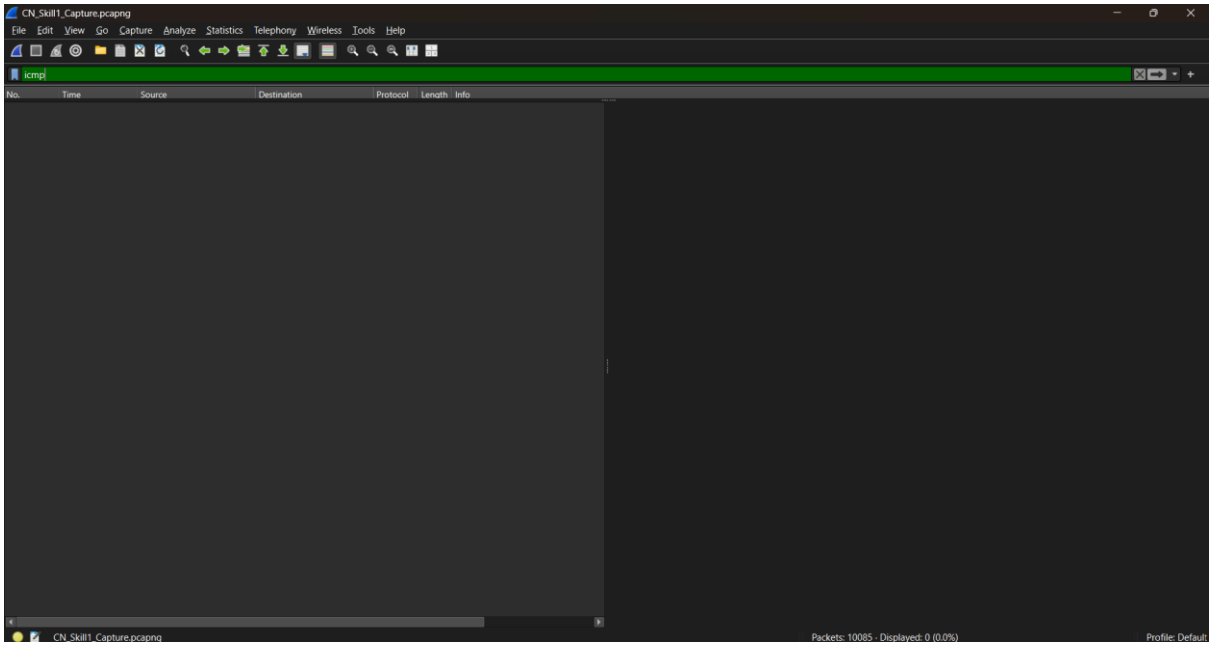
upd


*Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
udp
No. Time Source Destination Protocol Length Info
wireshark_Wi-FiDB10Y3.pcapng
Packets: 10085 · Displayed: 6518 (64.6%) · Dropped: 0 (0.0%)
Profile: Default

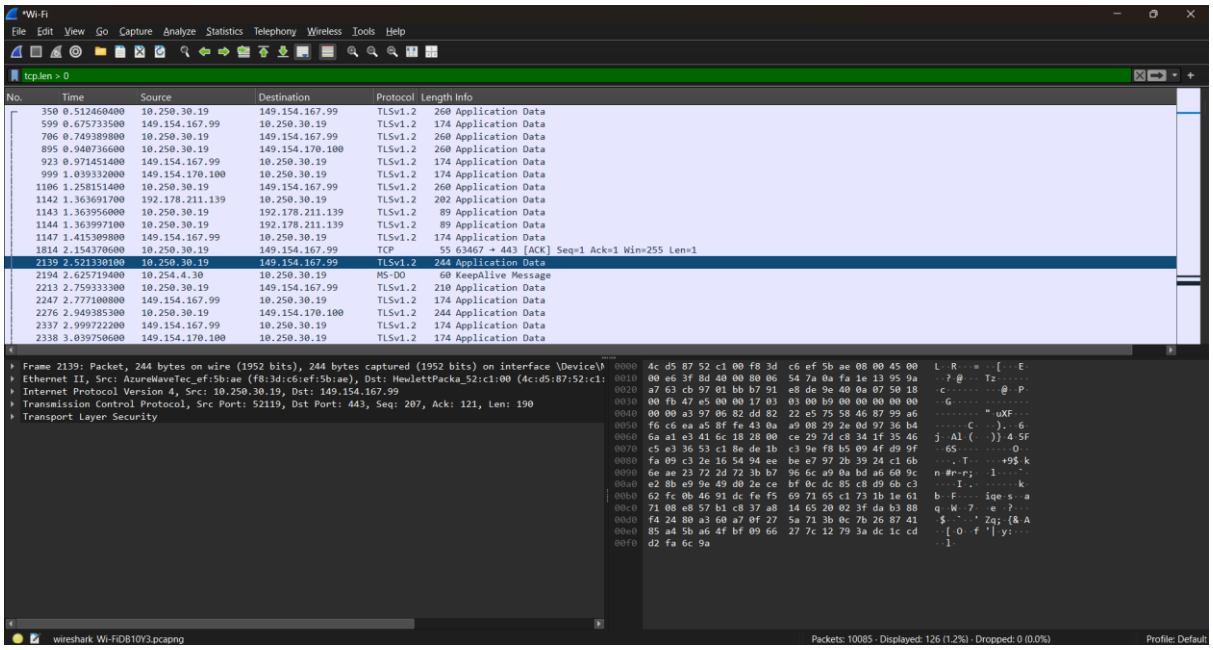

CN_Skill1_Capture.pcapng
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
udp
Frame 2503: Packet, 530 bytes on wire (4240 bits), 530 bytes captured (4240 bits) on interface \Device\NPF_{17C0C129-D07E-4FE6-ADAA-337E397DF08D}, id 0
Section number: 1
Interface id: 0 (\Device\NPF_{17C0C129-D07E-4FE6-ADAA-337E397DF08D})
Encapsulation type: Ethernet (1)
Arrival Time: Nov 12, 2026 12:04:39.091080100 India Standard Time
UTC Arrival Time: Nov 12, 2026 06:34:39.091080100 UTC
Epoch Arrival Time: 1794465279.091080100
[Time shift for this packet: 0.000000000 seconds]
[Time delta from previous captured frame: 540.400 microseconds]
[Time delta from previous displayed frame: 540.400 microseconds]
[Time since reference or first frame: 3.281816000 seconds]
Frame Number: 2503
Frame Length: 530 bytes (4240 bits)
Capture Length: 530 bytes (4240 bits)
[Frame is marked: False]
[Frame is ignored: False]
[Protocols in frame: eth:ethertype:ipv6:udp:mdns]
Character encoding: ASCII (0)
[Coloring Rule Name: UDP]
[Coloring Rule String: udp]
Ethernet II, Src: 42:ee:d7:43:95:ff (42:ee:d7:43:95:ff), Dst: IPv6mcast_fb (33:33:00:00:00:fb)
Destination: IPv6mcast_fb (33:33:00:00:00:fb)
Source: 42:ee:d7:43:95:ff (42:ee:d7:43:95:ff)
Type: IPv6 (0x86dd)
[Stream index: 89]
Internet Protocol Version 6, Src: fe80::1451:1274:cf7f:ffc7, Dst: ff02::fb
User Datagram Protocol, Src Port: 5353, Dst Port: 5353
Multicast Domain Name System (query)
User Datagram Protocol: Protocol
Packets: 10085 · Displayed: 6518 (64.6%)
Profile: Default

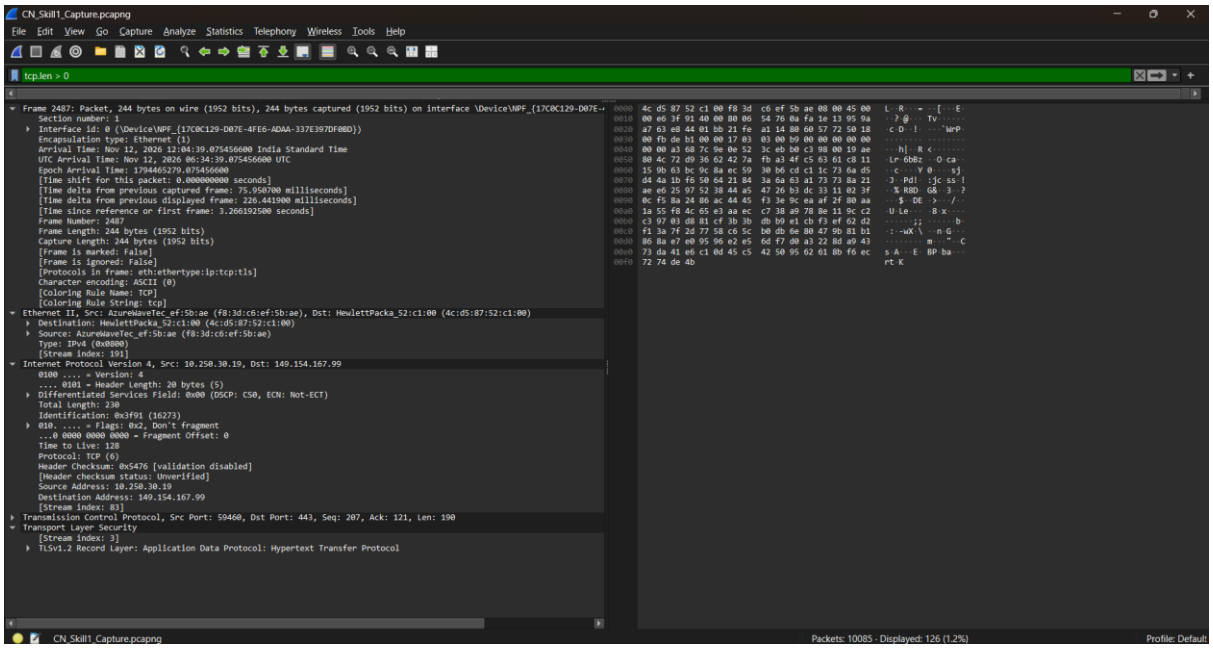
icmp


*Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
icmp
No. Time Source Destination Protocol Length Info
wireshark_Wi-FiDB10Y3.pcapng
Packets: 10085 · Displayed: 0 (0.0%) · Dropped: 0 (0.0%)
Profile: Default


CN_Skill1_Capture.pcapng
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
icmp
No. Time Source Destination Protocol Length Info
CN_Skill1_Capture.pcapng
Packets: 10085 · Displayed: 0 (0.0%)
Profile: Default

tcp.len > 0


*Wi-Fi
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.len > 0
No. Time Source Destination Protocol Length Info
350 0.512460400 10.250.30.19 149.154.167.99 TLSv1.2 260 Application Data
599 0.675733500 149.154.167.99 10.250.30.19 TLSv1.2 174 Application Data
706 0.749389800 10.250.30.19 149.154.167.99 TLSv1.2 260 Application Data
895 0.940736600 10.250.30.19 149.154.170.100 TLSv1.2 260 Application Data
923 0.971451400 149.154.167.99 10.250.30.19 TLSv1.2 174 Application Data
999 1.039332000 149.154.170.100 10.250.30.19 TLSv1.2 174 Application Data
1106 1.258151400 10.250.30.19 149.154.167.99 TLSv1.2 260 Application Data
1142 1.363691700 192.178.211.139 10.250.30.19 TLSv1.2 202 Application Data
1143 1.363956000 10.250.30.19 192.178.211.139 TLSv1.2 89 Application Data
1144 1.363997100 10.250.30.19 192.178.211.139 TLSv1.2 89 Application Data
1147 1.415309800 149.154.167.99 10.250.30.19 TLSv1.2 174 Application Data
1814 2.154370600 10.250.30.19 149.154.167.99 TCP 55 63467 → 443 [ACK] Seq=1 Ack=1 Win=255 Len=1
2139 2.521330100 10.250.30.19 149.154.167.99 TLSv1.2 244 Application Data
2194 2.625719400 10.254.4.30 10.250.30.19 MS-DO 60 KeepAlive Message
2213 2.759333300 10.250.30.19 149.154.167.99 TLSv1.2 210 Application Data
2247 2.777100800 149.154.167.99 10.250.30.19 TLSv1.2 174 Application Data
2276 2.949385300 10.250.30.19 149.154.170.100 TLSv1.2 244 Application Data
2337 2.999722200 149.154.167.99 10.250.30.19 TLSv1.2 174 Application Data
2338 3.039750600 149.154.170.100 10.250.30.19 TLSv1.2 174 Application Data
Frame 2139: Packet, 244 bytes on wire (1952 bits), 244 bytes captured (1952 bits) on interface \Device\
Ethernet II, Src: AzureWaveTec_ef:5b:ae (f8:3d:c6:ef:5b:ae), Dst: HewlettPacka_52:c1:00 (4c:d5:87:52:c1:
Internet Protocol Version 4, Src: 10.250.30.19, Dst: 149.154.167.99
Transmission Control Protocol, Src Port: 52119, Dst Port: 443, Seq: 207, Ack: 121, Len: 190
Transport Layer Security
wireshark Wi-FiDB10Y3.pcapng
Packets: 10085 · Displayed: 126 (1.2%) · Dropped: 0 (0.0%)
Profile: Default


CN_Skill1_Capture.pcapng
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.len > 0
Frame 2487: Packet, 244 bytes on wire (1952 bits), 244 bytes captured (1952 bits) on interface \Device\NPF_{17C0C129-D07E-
Section number: 1
Interface id: 0 (\Device\NPF_{17C0C129-D07E-4FE6-ADAA-337E397DF08D})
Encapsulation type: Ethernet (1)
Arrival Time: Nov 12, 2026 12:04:39.075456600 India Standard Time
UTC Arrival Time: Nov 12, 2026 06:34:39.075456600 UTC
Epoch Arrival Time: 1794465279.075456600
[Time shift for this packet: 0.000000000 seconds]
[Time delta from previous captured frame: 75.950700 milliseconds]
[Time delta from previous displayed frame: 226.441900 milliseconds]
[Time since reference or first frame: 3.266192500 seconds]
Frame Number: 2487
Frame Length: 244 bytes (1952 bits)
Capture Length: 244 bytes (1952 bits)
[Frame is marked: False]
[Frame is ignored: False]
[Protocols in frame: eth:ethertype:ip:tcp:tls]
Character encoding: ASCII (0)
[Coloring Rule Name: TCP]
[Coloring Rule String: tcp]
Ethernet II, Src: AzureWaveTec_ef:5b:ae (f8:3d:c6:ef:5b:ae), Dst: HewlettPacka_52:c1:00 (4c:d5:87:52:c1:00)
Destination: HewlettPacka_52:c1:00 (4c:d5:87:52:c1:00)
Source: AzureWaveTec_ef:5b:ae (f8:3d:c6:ef:5b:ae)
Type: IPv4 (0x0800)
[Stream index: 191]
Internet Protocol Version 4, Src: 10.250.30.19, Dst: 149.154.167.99
0100 .... = Version: 4
.... 0101 = Header Length: 20 bytes (5)
Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
Total Length: 230
Identification: 0x3f91 (16273)
010. .... = Flags: 0x2, Don't fragment
...0 0000 0000 0000 = Fragment Offset: 0
Time to Live: 128
Protocol: TCP (6)
Header Checksum: 0x5476 [validation disabled]
[Header checksum status: Unverified]
Source Address: 10.250.30.19
Destination Address: 149.154.167.99
[Stream index: 83]
Transmission Control Protocol, Src Port: 59460, Dst Port: 443, Seq: 207, Ack: 121, Len: 190
Transport Layer Security
[Stream index: 3]
TLSv1.2 Record Layer: Application Data Protocol: Hypertext Transfer Protocol
0000 4c d5 87 52 c1 00 f8 3d c6 ef 5b ae 08 00 45 00
0010 00 e6 3f 91 40 00 80 06 54 76 0a fa 1e 13 95 9a
0020 a7 63 e8 44 01 bb 21 fe a1 14 80 60 57 72 50 18
0030 00 fb de b1 00 00 17 03 03 00 b9 00 00 00 00 00
0040 00 00 a3 6d 7c 9e 0e 52 3c eb b0 c3 98 00 19 ae
0050 80 4c 72 d9 36 62 42 7a fb a3 4f c5 63 61 c8 11
0060 15 9b 63 bc 9c 8a ec 59 30 b6 cd c1 1c 73 6a d5
0070 d4 4a 1b f6 50 64 21 84 3a 6a 63 a1 73 73 8a 21
0080 ae e6 25 97 52 38 44 a5 47 26 b3 dc 33 11 02 3f
0090 0c f5 8a 24 86 ac 44 45 f3 3e 9c ea af 2f 80 aa
00a0 1a 55 f8 4c 65 e3 aa ec c7 38 a9 78 8e 11 9c c2
00b0 c3 97 03 d8 01 cf 1b 1b db b9 a1 cb f3 ef 62 d2
00c0 f1 3a 7f 2d 77 58 c6 5c b0 db 6e 80 47 9b 81 b1
00d0 86 8a e7 e0 95 96 e2 e5 6d f7 d0 a3 22 8d a9 43
00e0 73 da 41 e6 c1 0d 45 c5 42 50 95 62 61 8b f6 ec
00f0 72 74 de 4b
CN_Skill1_Capture.pcapng
Packets: 10085 · Displayed: 126 (1.2%)
Profile: Default