


DWG-04

AGRIBOT-X SPECIFICATION - 3D ISOMETRIC ASSEMBLY

ASSEMBLY CALLOUT KEY:

1. Autonomous Surveillance Drone
2. Top Docking & Charging Bay
3. Faceted Titanium Shell Canopy
4. Pan/Tilt Dual-Camera Turret
5. Electric-Blue LED Light Brow
6. Tubular Aluminum Bullbar
7. White Coilover Shock Strut
8. Deep-Lug Tractor Wheel (340mm)
9. Elevated Monocoque Skid Belly

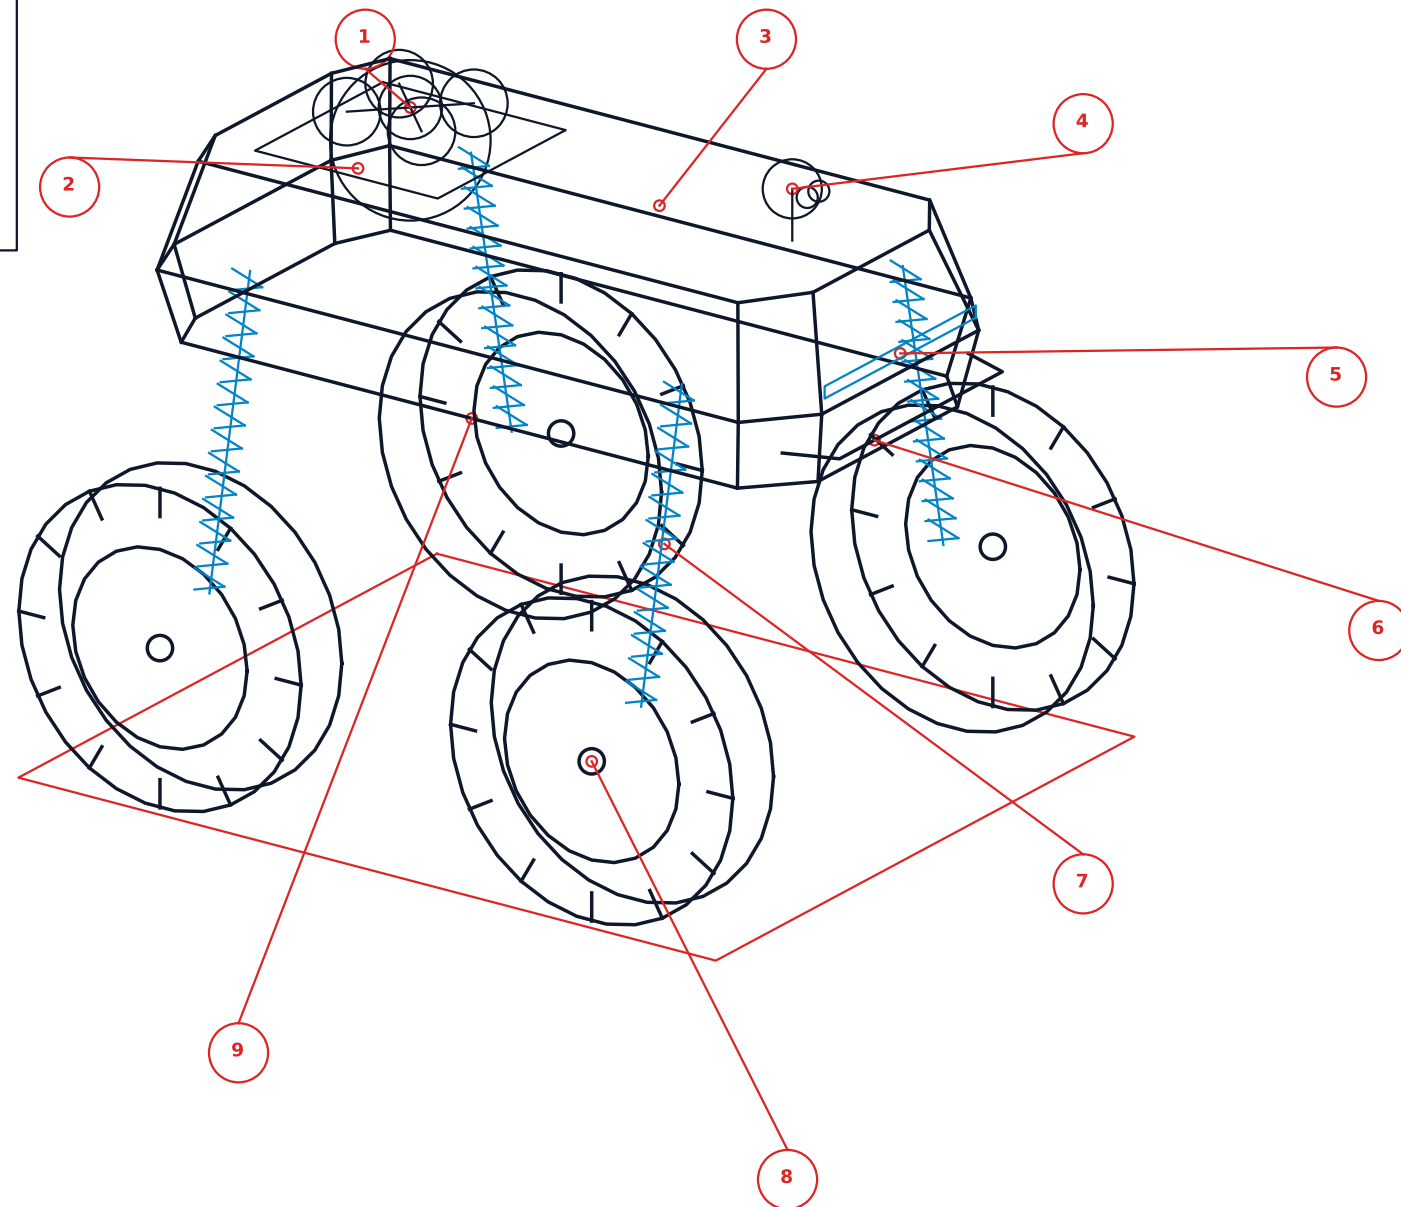

SHEET 4 ASSEMBLY & VERIFICATION GUIDELINES:

1. Torque Specifications: Shock clevis bolts (M8 Grade 8.8) torqued to 22.0 Nm with Loctite 243 blue threadlocker.
2. Spring Preload: Set coilover collar to 15.0 mm initial compression for 32.0 kg nominal vehicle curb weight.
3. Hub Fasteners: 6-lug beadlock pattern torqued in cross-star sequence to 9.5 Nm to ensure airtight tire seal.
4. Enclosure Ingress Protection: Verify continuous silicone O-ring compression before field deployment.

AGRIBOT-X AUTONOMOUS ROVER
TITLE: 3D ISOMETRIC ASSEMBLY

DESIGN: HIGH-CLEARANCE STRUT
STANDARD: ISO 2768-m TOLERANCES

DWG NO: AGX-2026-04

SCALE: 1:1 TRUE CAD
SHEET: 4 OF 4

REV: C.02 (CLEAN)