


DWG-01

HIGH-CLEARANCE STRUT ROVER - FRONT ELEVATION

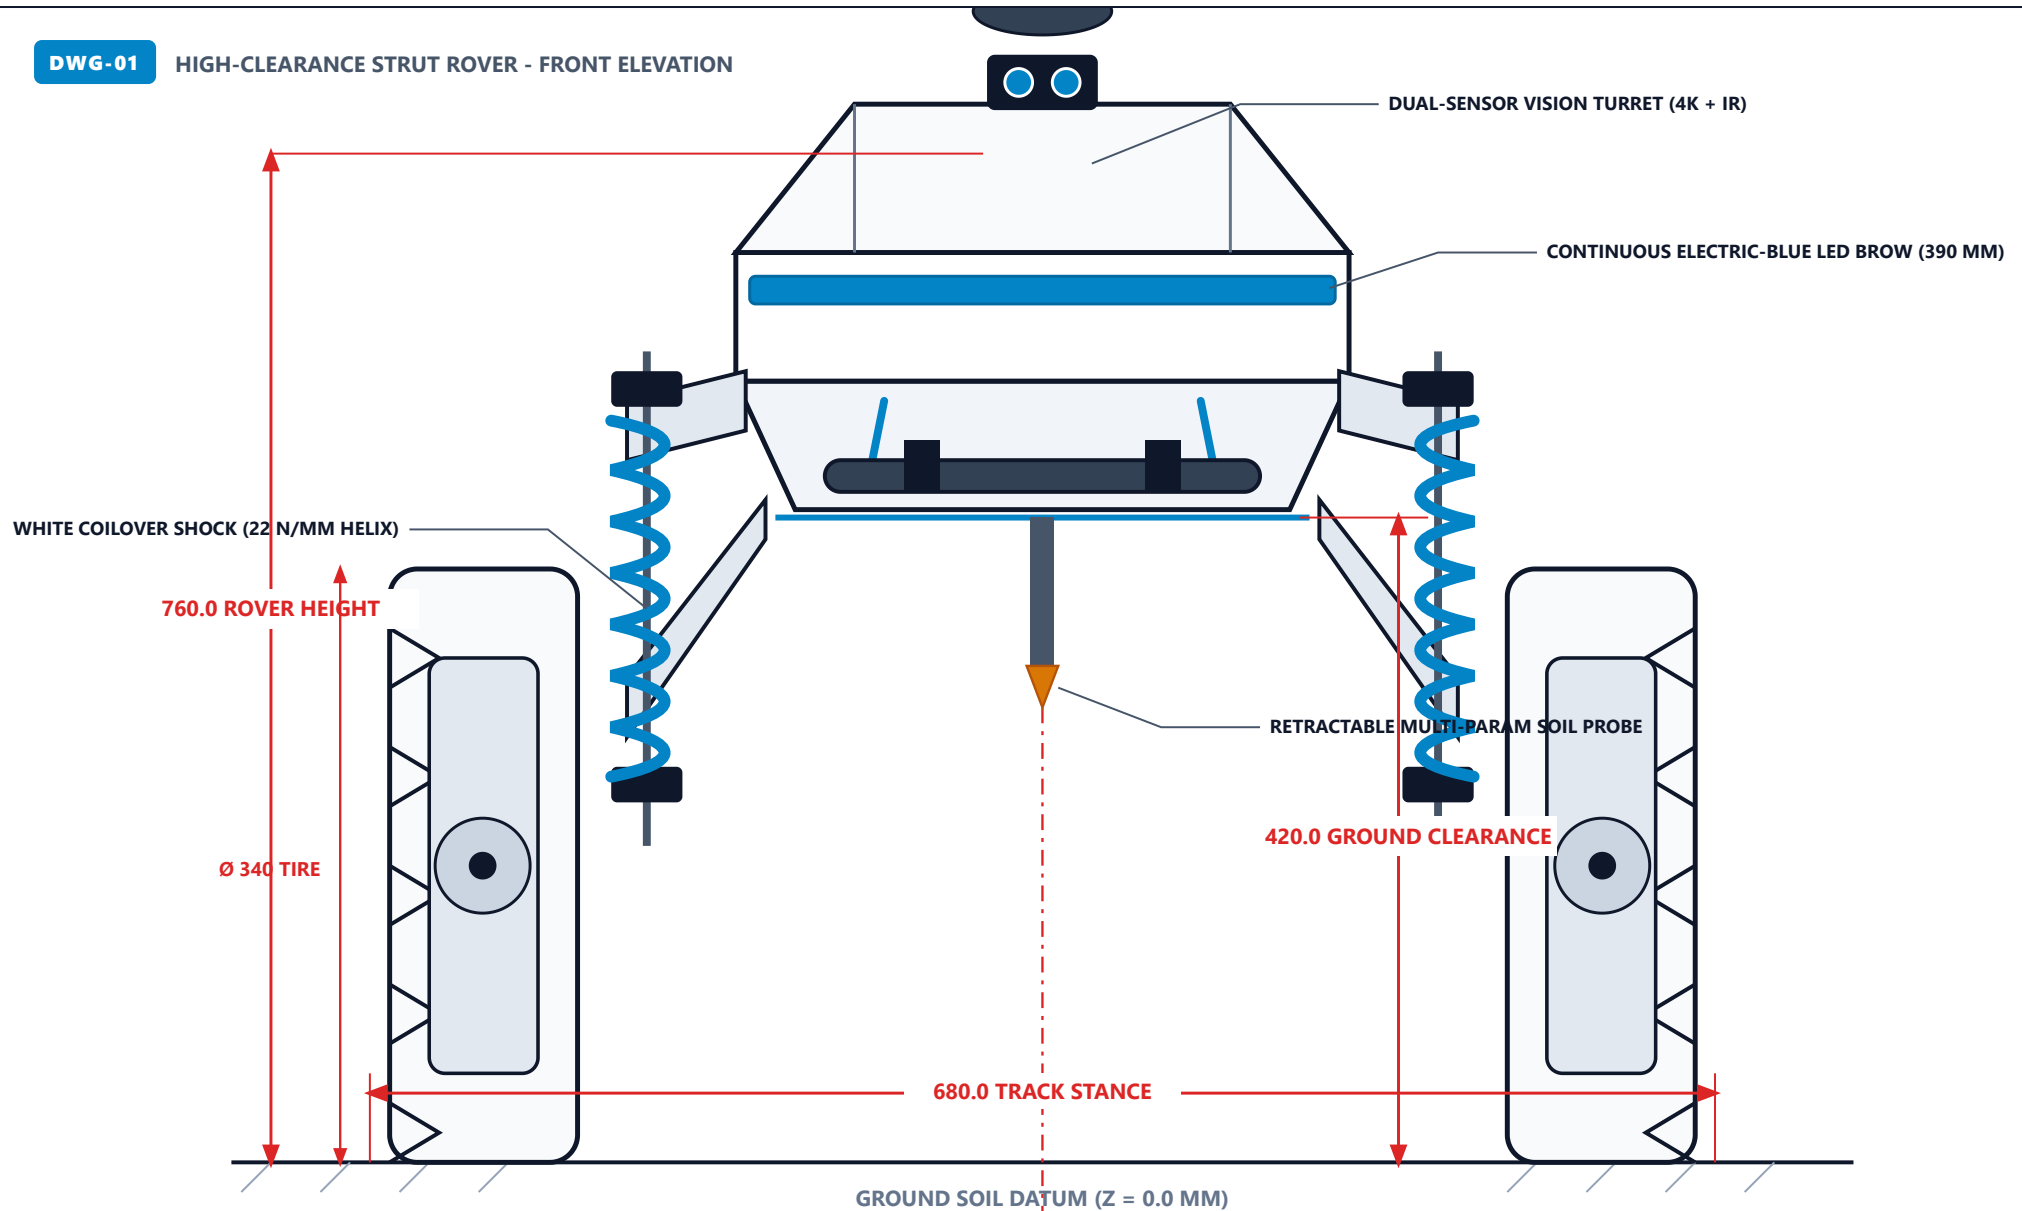

SHEET 1 NOTES & TOLERANCES (ISO 2768-M):

- Over-canopy portal strut architecture provides 420.0 mm nominal clearance to straddle crop rows.
- Track width (680 mm outer) designed for standard 700 mm agricultural row spacing without root compaction.
- Suspension uses 4x independent heavy-duty white coilover shocks with 110 mm active vertical travel.
- Materials: Chassis Al 6061-T6 monocoque, canopy Al 5052-H32, fasteners A2-70 stainless steel.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER

DRAWING TITLE
FRONT ELEVATION VIEW

SCALE: 1:5
UNITS: MM

DWG NO: AGX-2026-01

REV: C.02

SHEET: 1 OF 4