


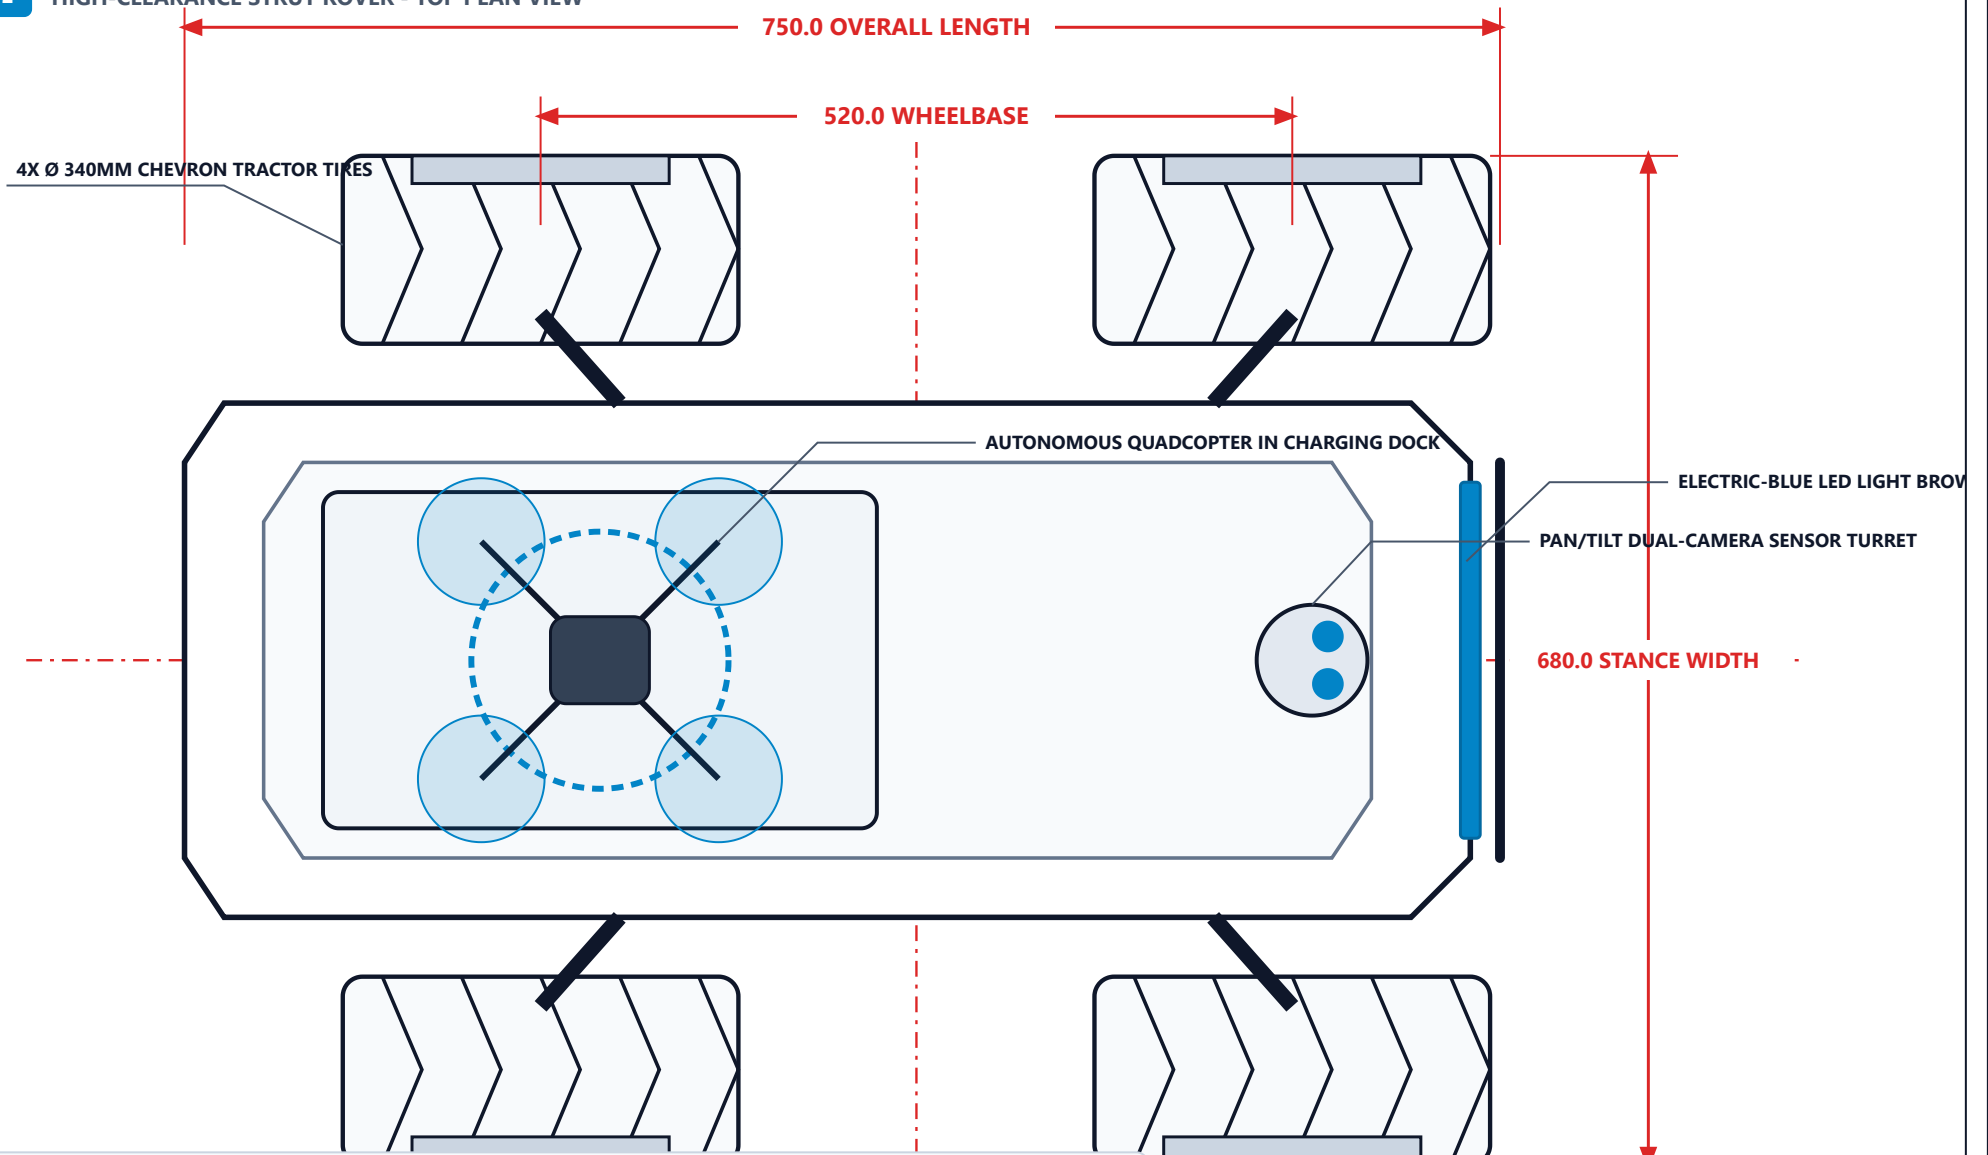

SHEET 2 NOTES: DRIVETRAIN & DOCKING GEOMETRY:

- 4WD independent BLDC motors (350W each, 1:20 planetary gear) provide zero-turn skid steering capability.
- Drone landing platform equipped with self-centering funnel bevels and spring-loaded copper charging rails.
- Dual optical sensors positioned forward of vehicle front axle for unobstructed plant foliage inspection.
- Billet aluminum outer beadlock rings prevent tire de-beading under high-torque mud operations.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER

DRAWING TITLE
TOP PLAN VIEW

SCALE: 1:5
UNITS: MM

DWG NO: AGX-2026-02

REV: C.02

SHEET: 2 OF 4