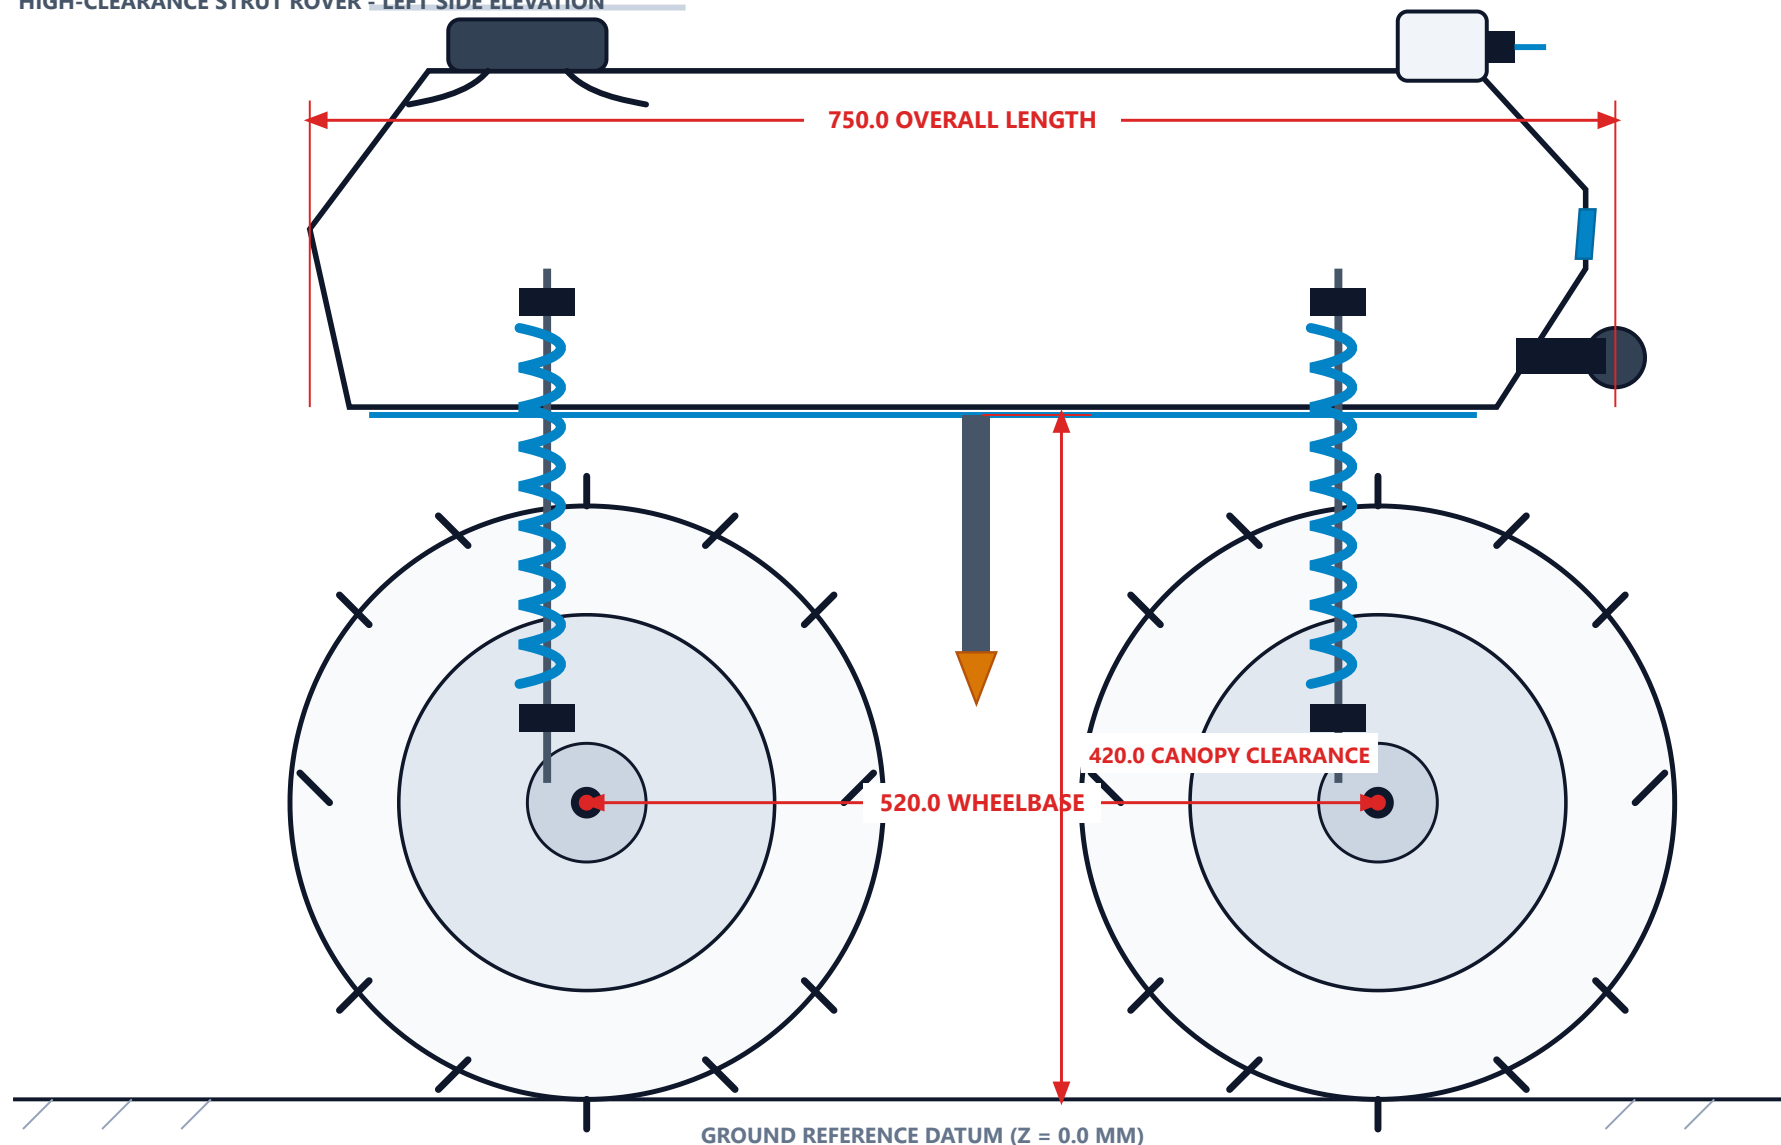


**SHEET 3 NOTES: KINEMATICS & SOIL PENETRATION:**

1. 420.0 mm over-canopy clearance ensures zero plant drag in arecanut/crop plantations.
2. Retractable probe driven by precision MGN15 linear rail & T8x2 lead screw (150 mm active stroke into soil).
3. Front brush guard absorbs direct impacts from fallen branches and uneven agricultural terrain.
4. Quadcopter perched in low-drag recessed bay to maintain low vehicle center of gravity.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER

DRAWING TITLE
SIDE ELEVATION VIEW

SCALE: 1:5
UNITS: MM

DWG NO: AGX-2026-03

REV: C.02

SHEET: 3 OF 4