


DWG-01

HIGH-CLEARANCE STRUT ROVER - FRONT ELEVATION

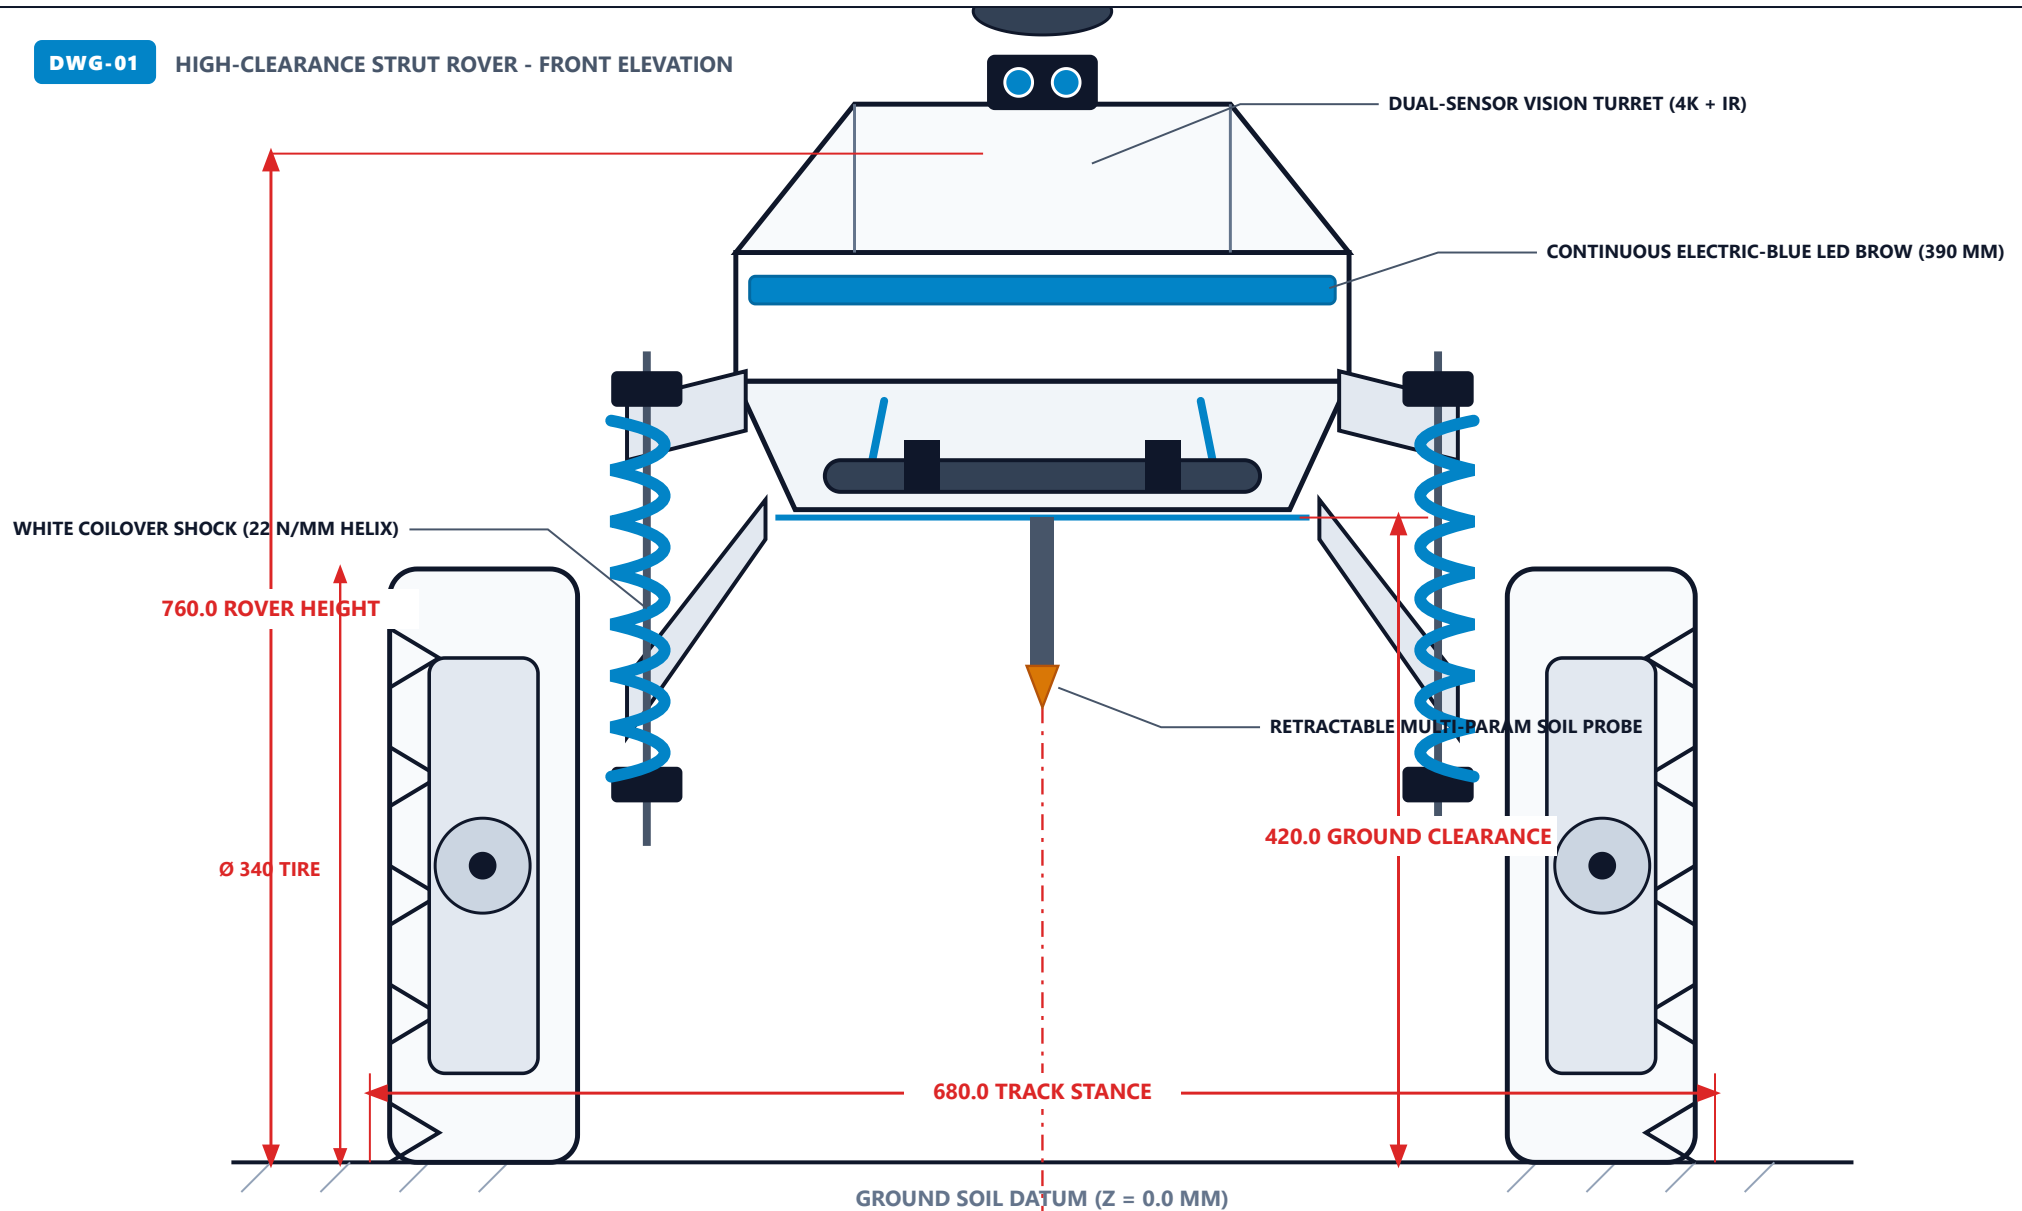

SHEET 1 NOTES & TOLERANCES (ISO 2768-M):

- Over-canopy portal strut architecture provides 420.0 mm nominal clearance to straddle crop rows.
- Track width (680 mm outer) designed for standard 700 mm agricultural row spacing without root compaction.
- Suspension uses 4x independent heavy-duty white coilover shocks with 110 mm active vertical travel.
- Materials: Chassis Al 6061-T6 monocoque, canopy Al 5052-H32, fasteners A2-70 stainless steel.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER


DRAWING TITLE
FRONT ELEVATION VIEW

SCALE: 1:5
UNITS: MM

DWG NO: AGX-2026-01

REV: C.02

SHEET: 1 OF 4

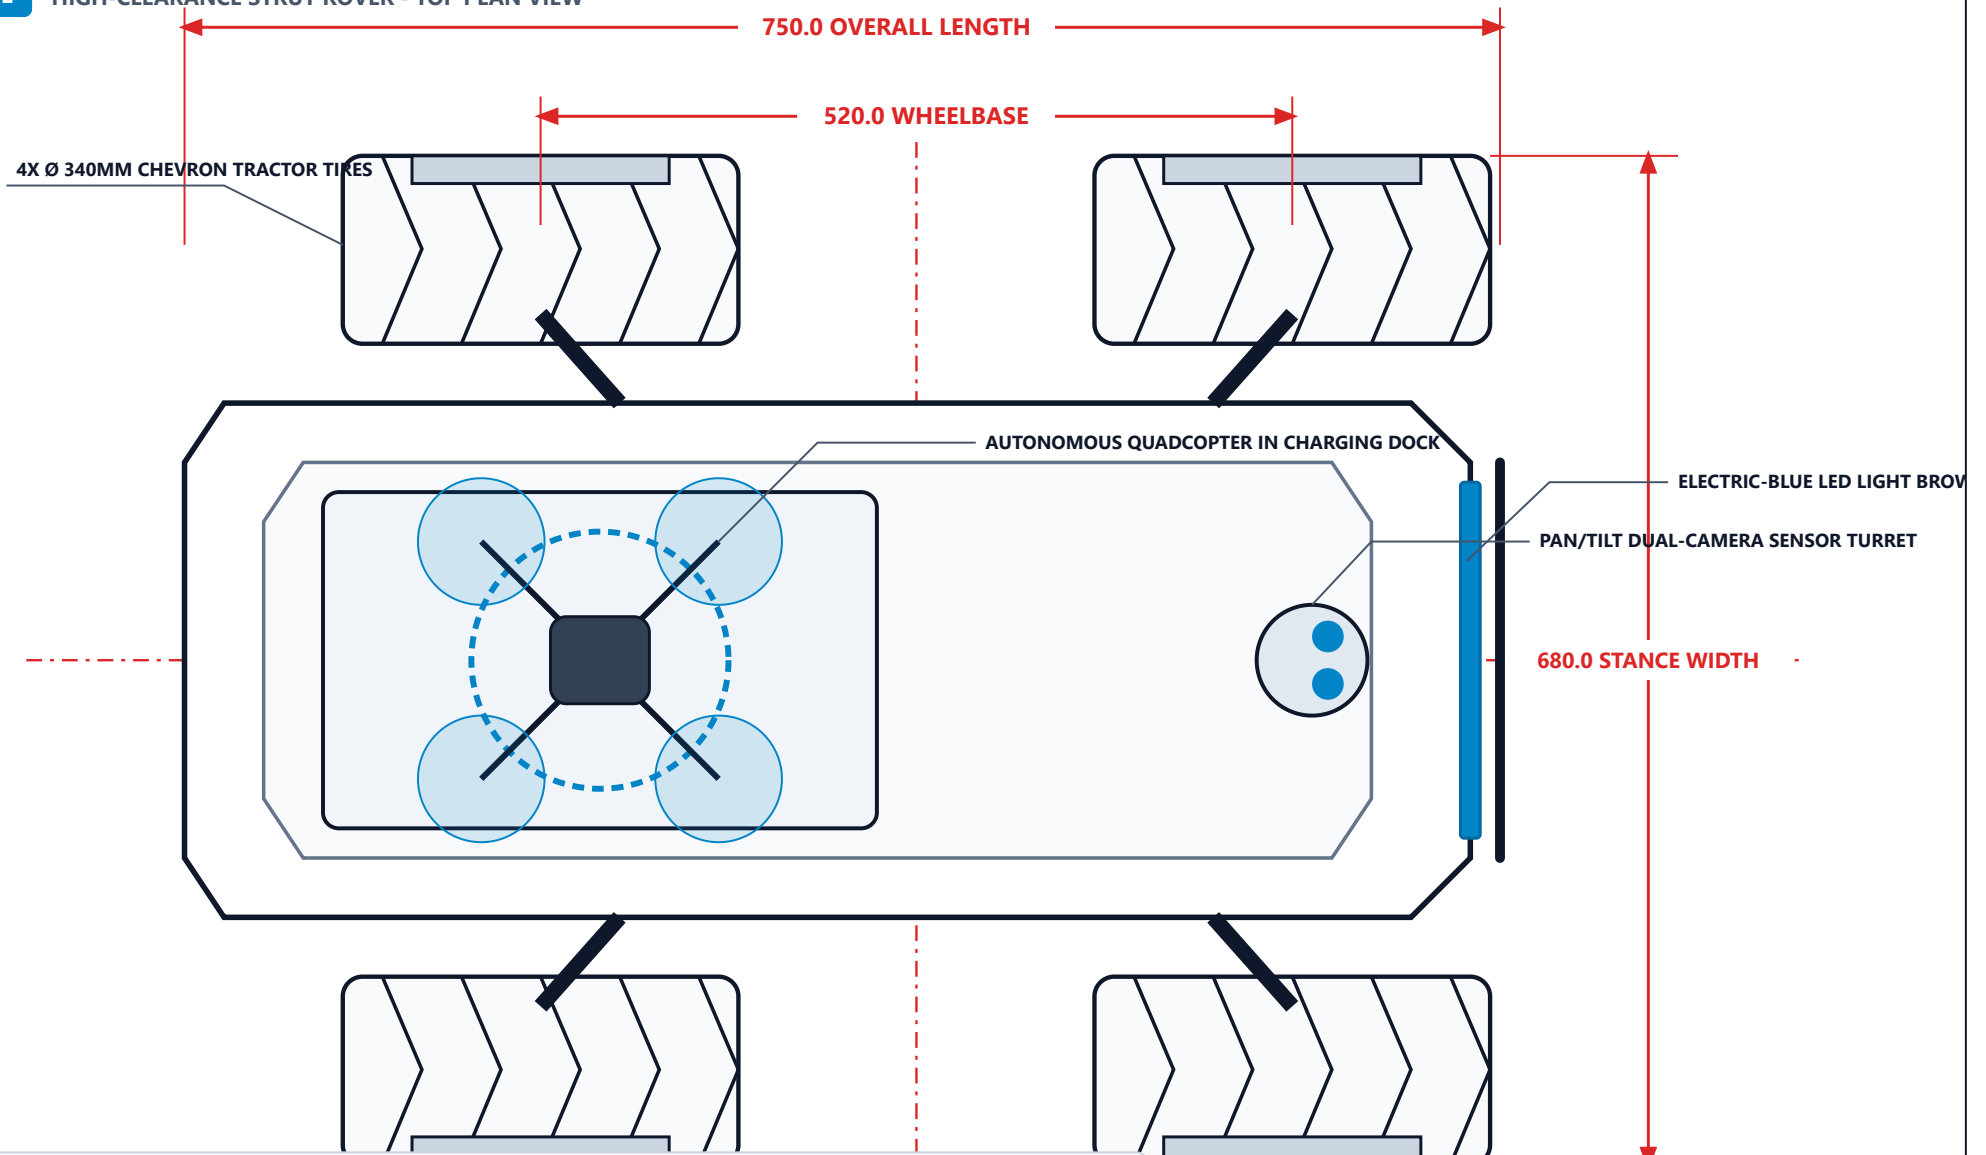

SHEET 2 NOTES: DRIVETRAIN & DOCKING GEOMETRY:

- 4WD independent BLDC motors (350W each, 1:20 planetary gear) provide zero-turn skid steering capability.
- Drone landing platform equipped with self-centering funnel bevels and spring-loaded copper charging rails.
- Dual optical sensors positioned forward of vehicle front axle for unobstructed plant foliage inspection.
- Billet aluminum outer beadlock rings prevent tire de-beading under high-torque mud operations.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER


DRAWING TITLE
TOP PLAN VIEW

SCALE: 1:5
UNITS: MM

DWG NO: AGX-2026-02

REV: C.02

SHEET: 2 OF 4

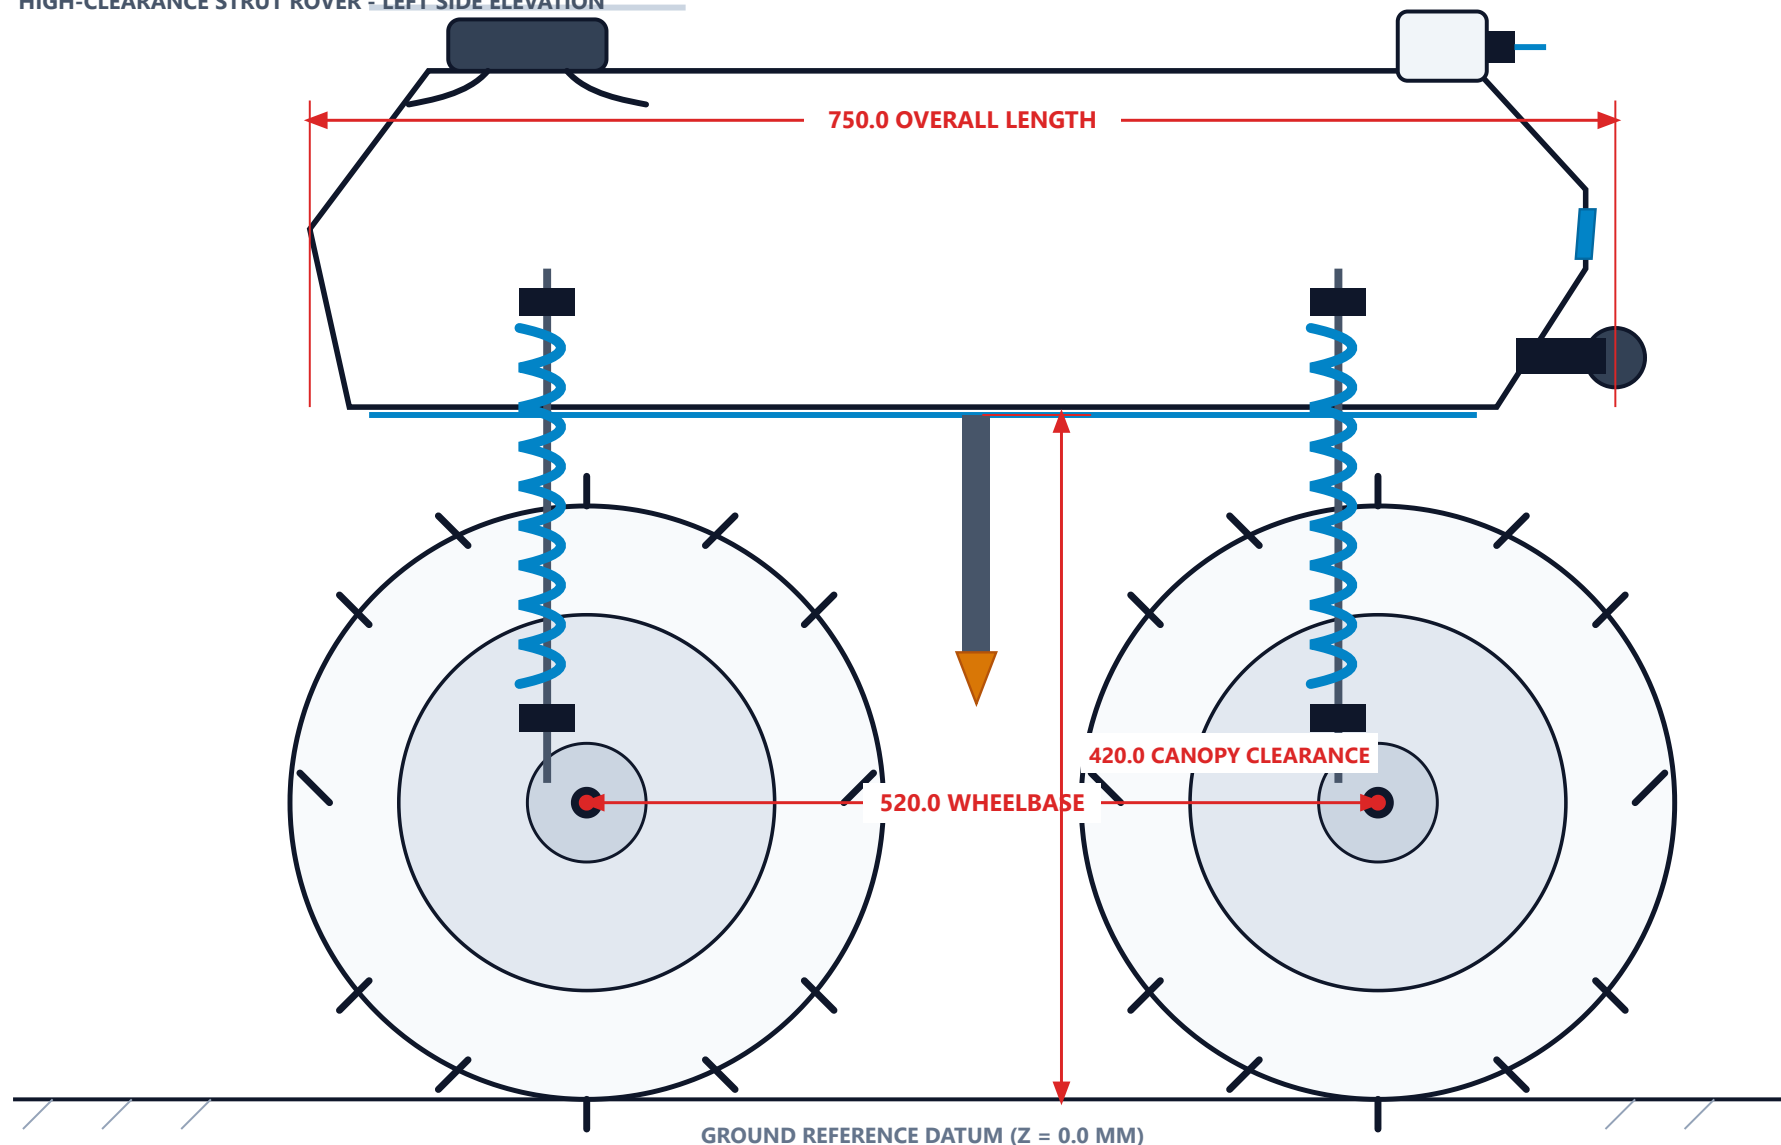**SHEET 3 NOTES: KINEMATICS & SOIL PENETRATION:**

1. 420.0 mm over-canopy clearance ensures zero plant drag in arecanut/crop plantations.
2. Retractable probe driven by precision MGN15 linear rail & T8x2 lead screw (150 mm active stroke into soil).
3. Front brush guard absorbs direct impacts from fallen branches and uneven agricultural terrain.
4. Quadcopter perched in low-drag recessed bay to maintain low vehicle center of gravity.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER

DRAWING TITLE
SIDE ELEVATION VIEW

SCALE: 1:5
UNITS: MM


DWG NO: AGX-2026-03

REV: C.02

SHEET: 3 OF 4

ASSEMBLY CALLOUT KEY:

1. Surveillance Quadcopter Drone
2. Drone Docking & Charging Pad
3. Faceted Titanium Silver Canopy
4. Pan/Tilt Dual Vision Turret
5. Electric-Blue LED Light Brow
6. Tubular Heavy-Duty Bullbar
7. White Helical Coilover Shock
8. Ø 340mm Tractor Wheel (Chevron)
9. 420mm High-Clearance Belly

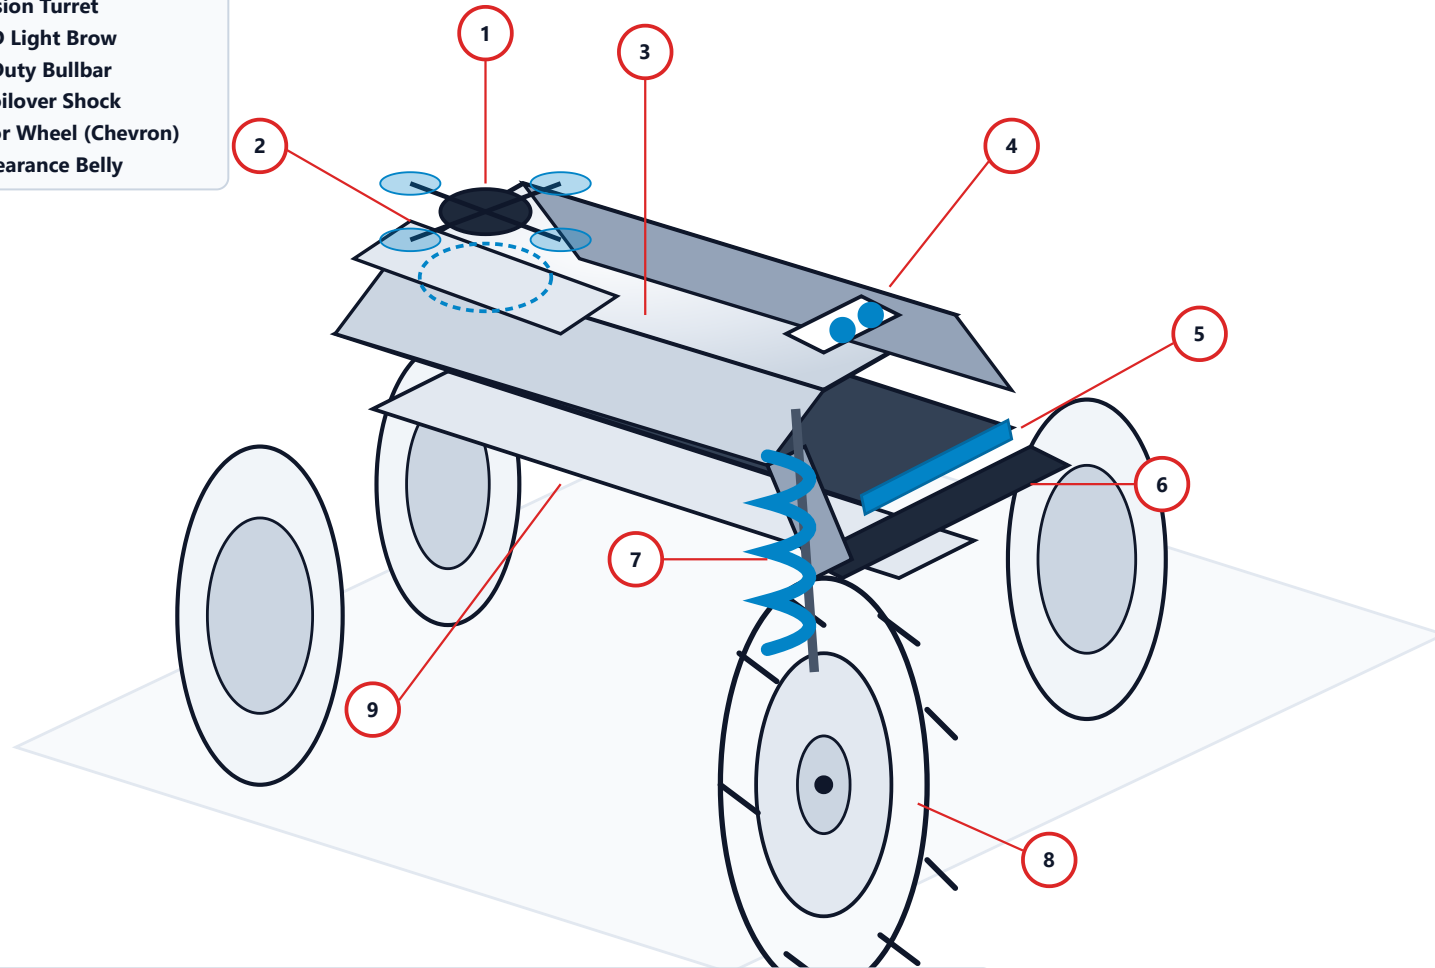**SHEET 4 NOTES: ASSEMBLY & QUALITY INSPECTION:**

1. Ensure all 4 portal arm pivots are torqued to 35 N·m and thread-locked with Loctite 243.
2. Coilover spring preload calibrated to 15 mm initial compression for 32 kg nominal vehicle mass.
3. Beadlock bolts (6x M6 per wheel) torqued in star pattern to 9.5 N·m.
4. Check IP65 silicone gasket compression along monocoque perimeter before wet testing.

AGRIBOT-X AUTONOMOUS AI FIELD ROVER

DRAWING TITLE
3D ISOMETRIC ASSEMBLY

SCALE: 1:5
UNITS: MM

DWG NO: AGX-2026-04

REV: C.02

SHEET: 4 OF 4