


DWG-03

AGRIBOT-X SPECIFICATION - SIDE ELEVATION VIEW

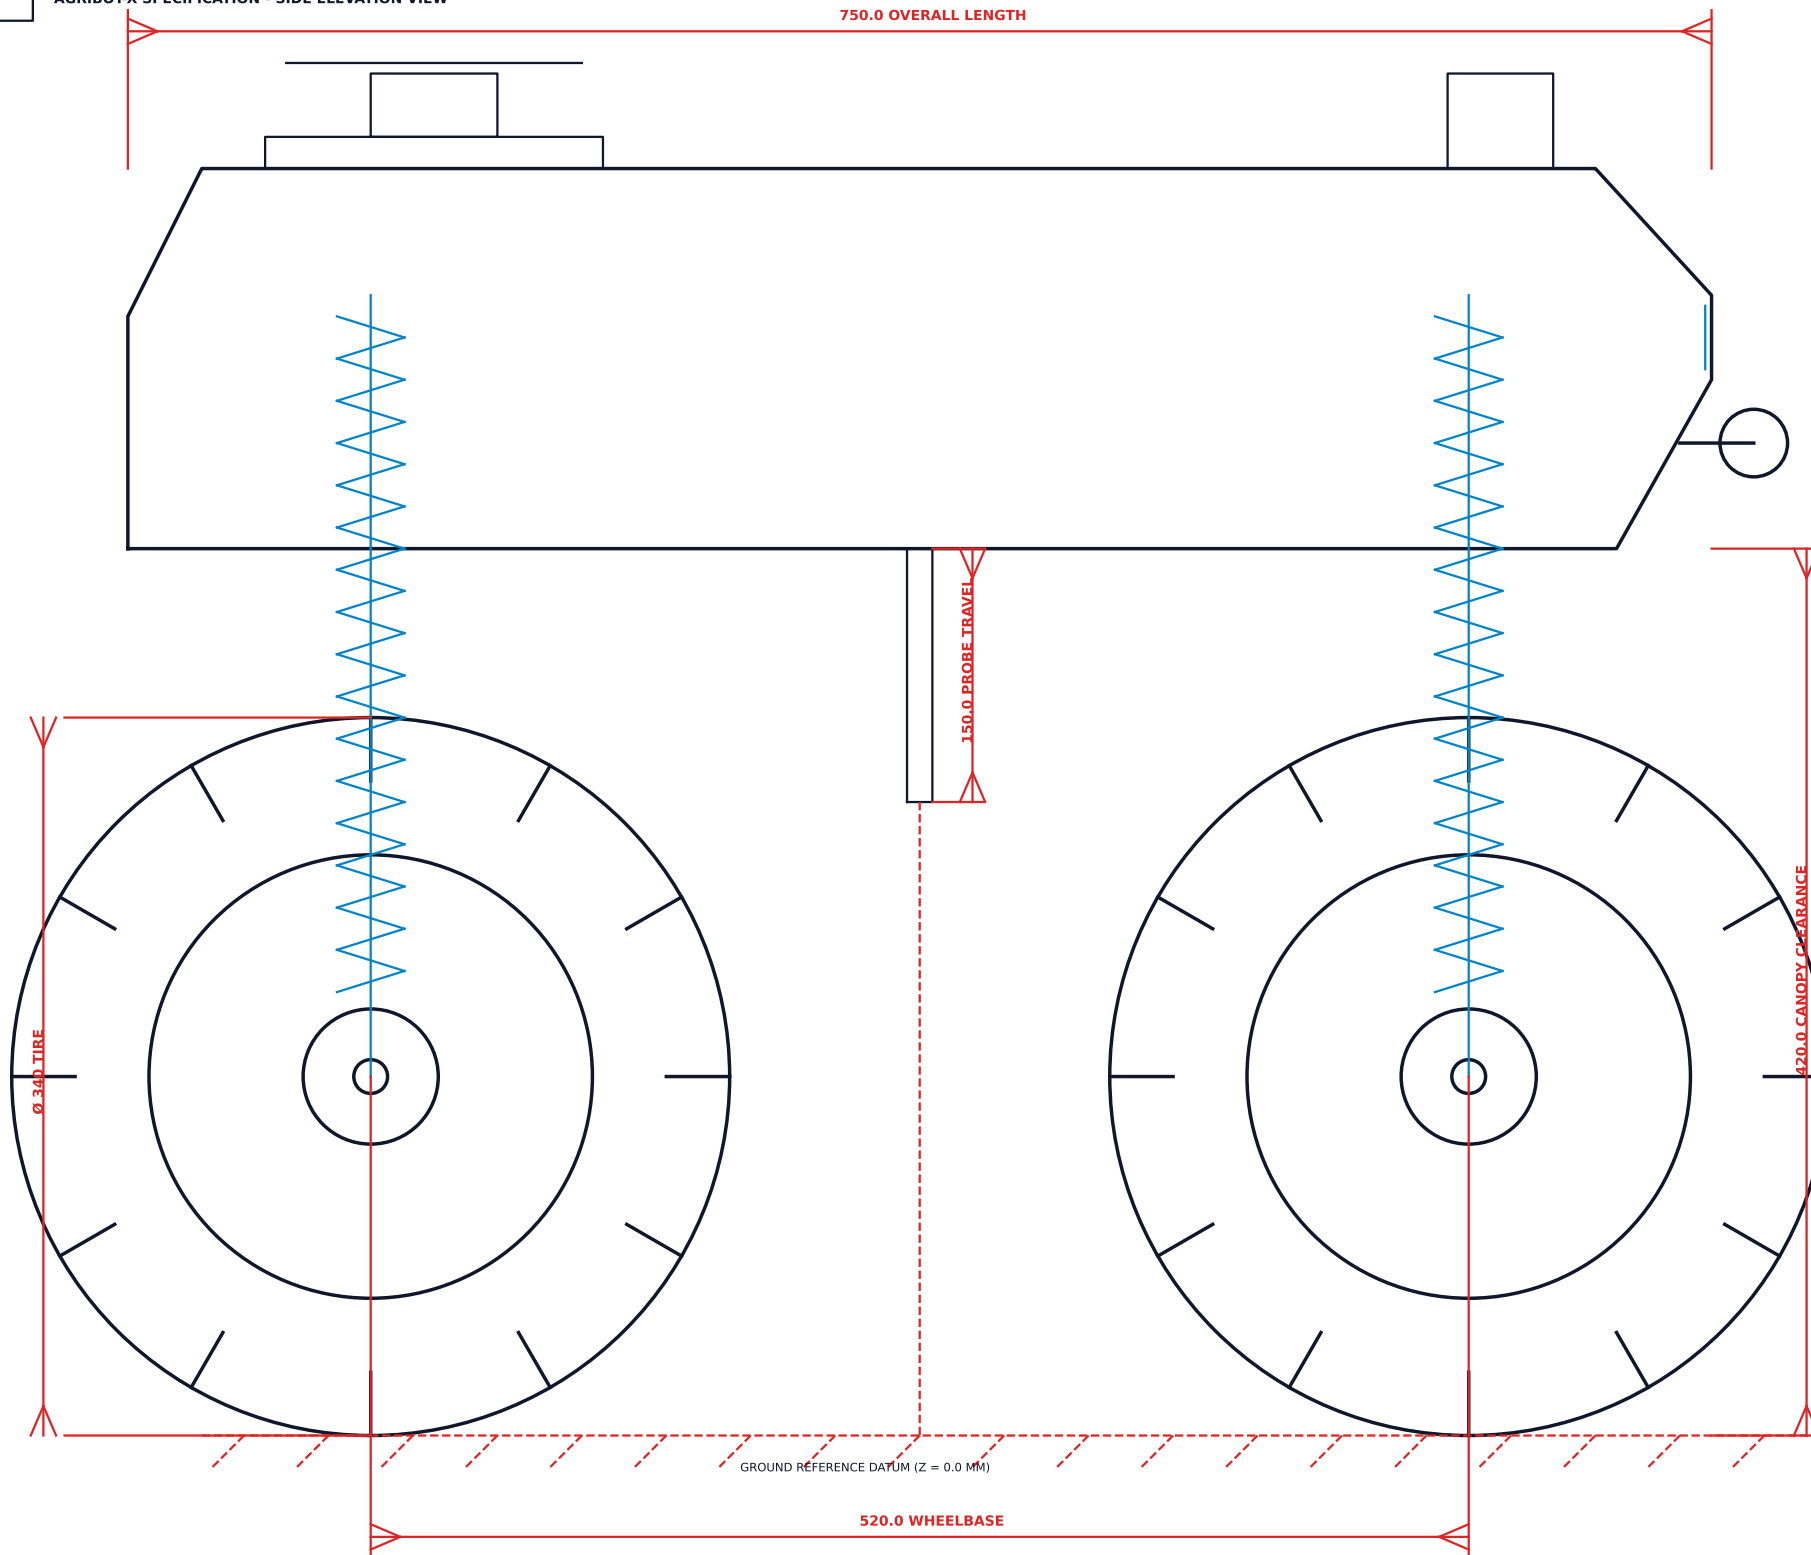

SHEET 3 KINEMATIC & SOIL PROBE SPECIFICATIONS:

1. Straddle Geometry: 420.0 mm belly clearance guarantees zero canopy friction across arecanut & nursery beds.
2. Soil Penetration: Precision MGN15 linear rail & T8x2 lead screw delivers 150 mm insertion into active root zone.
3. Sensor Cartridge: SS316 multi-parameter electrode measures Moisture, pH, EC, and Temperature via RS485 bus.
4. Center of Gravity: Low-slung battery placement ensures dynamic rollover stability on 25-degree field slopes.

AGRIBOT-X AUTONOMOUS ROVER
TITLE: SIDE ELEVATION VIEW

DESIGN: HIGH-CLEARANCE STRUT
STANDARD: ISO 2768-m TOLERANCES

DWG NO: AGX-2026-03

SCALE: 1:1 TRUE CAD
SHEET: 3 OF 4

REV: C.02 (CLEAN)