Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=30ms TTL=128
Reply from 192.168.1.3: bytes=32 time=0ms TTL=128
Reply from 192.168.1.3: bytes=32 time=0ms TTL=128
Reply from 192.168.1.3: bytes=32 time=0ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 30ms, Average = 9ms

PC>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Command Prompt

```
PC>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.2.3: bytes=32 time=21ms TTL=128
Reply from 192.168.2.3: bytes=32 time=1ms TTL=128
Reply from 192.168.2.3: bytes=32 time=3ms TTL=128
Reply from 192.168.2.3: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 21ms, Average = 6ms
```

CISCO Packet Tracer-1

EX09

AIM:

To design & configure a simple network topology consisting of one Router, two switches & Four PC with cisco packet tracer

PROCEDORE:

- open cisco packet tracer
- Add device

1☆ Router (cisco 1941 / 2911)

2☆ Switch (cisco 2960)

4☆ PC's

3. connect the device with a copper-straight through cable

4. open Router CLI & configure Inface Gig0/0, Gig0/1 & save configuration


5). open Router CLI & configure


open PC0 → desktop → Ip configuration Then configure IP address, subnet mask & default gateway

6). Similarly configure PC1, PC2, PC3

7). Test connectivity PC0 → PC1

PC0 → command Prompt → Ping 192.168.3

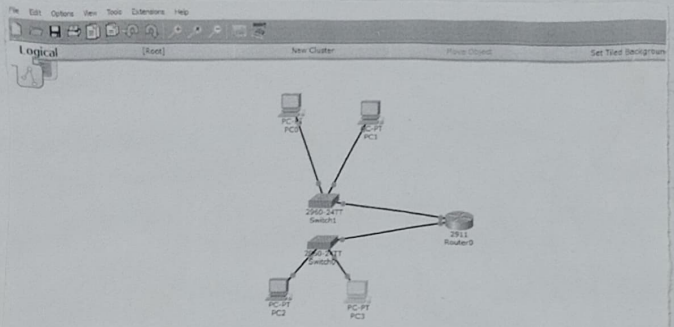

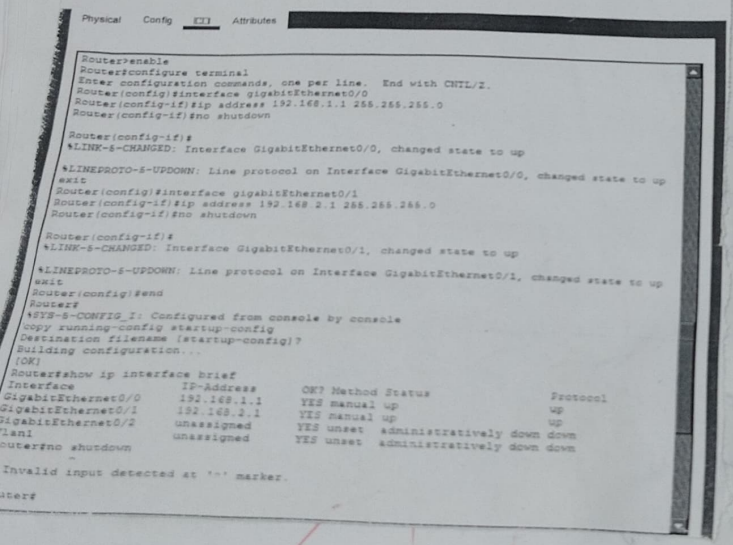

Result :

Thus the simple network topology with cisco packet tracer has been implemented & verified sucessfully