

EXPERIMENT-4

GENERATION AND DETECTION OF AM SIGNAL USING AM MODULATOR AND DEMODULATOR


MESSAGE SIGNAL (1 kHz) :

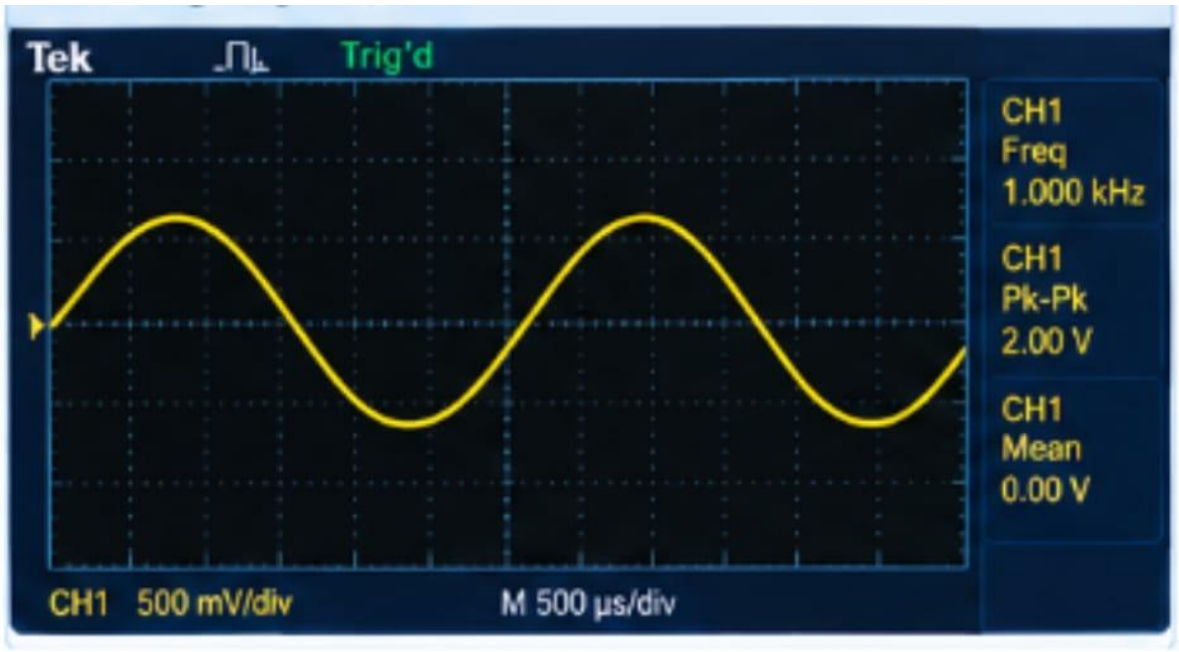


CARRIER SIGNAL (10 kHz) :

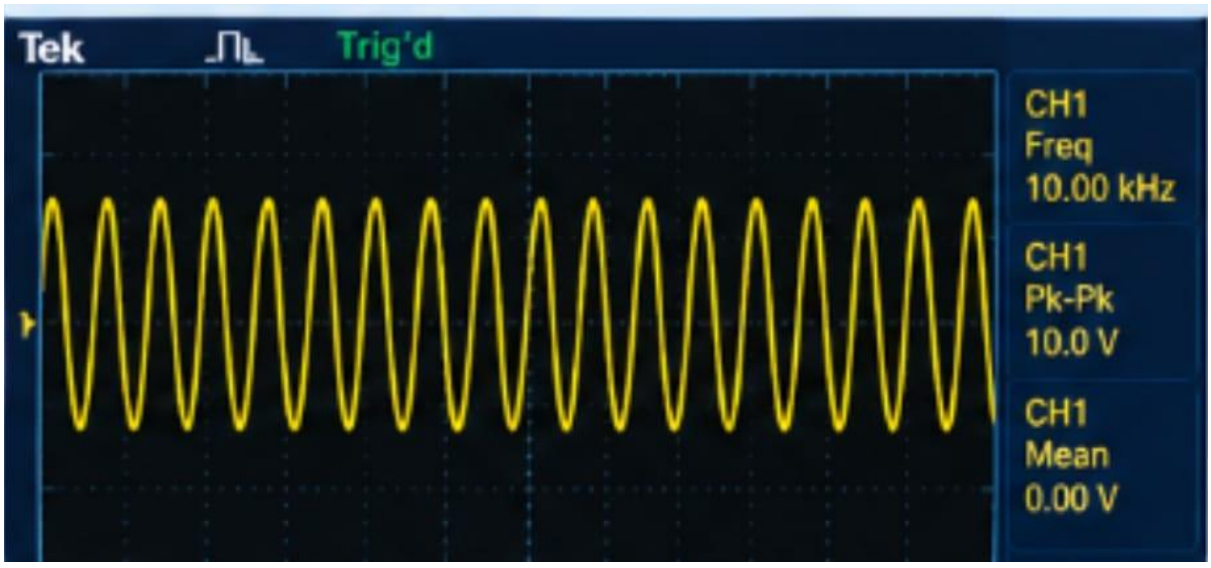


AM MODULATED SIGNAL (OUTPUT OF AM MODULATOR) :

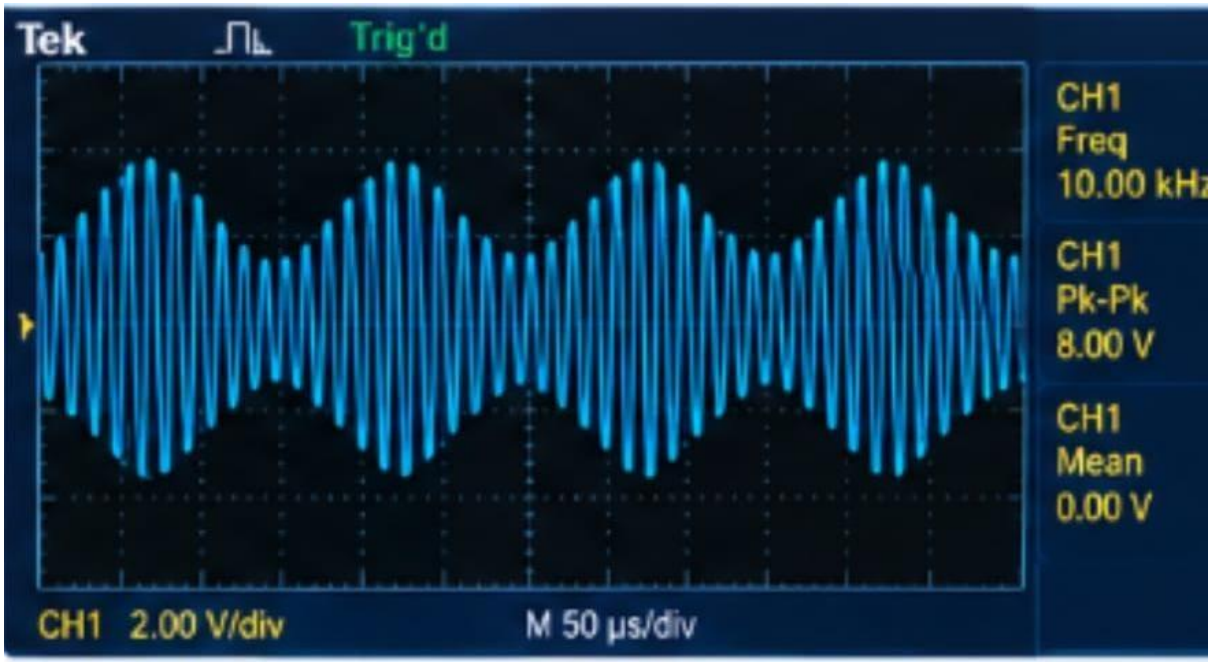

DEMODULATED OUTPUT (RECOVERED MESSAGE SIGNAL) :

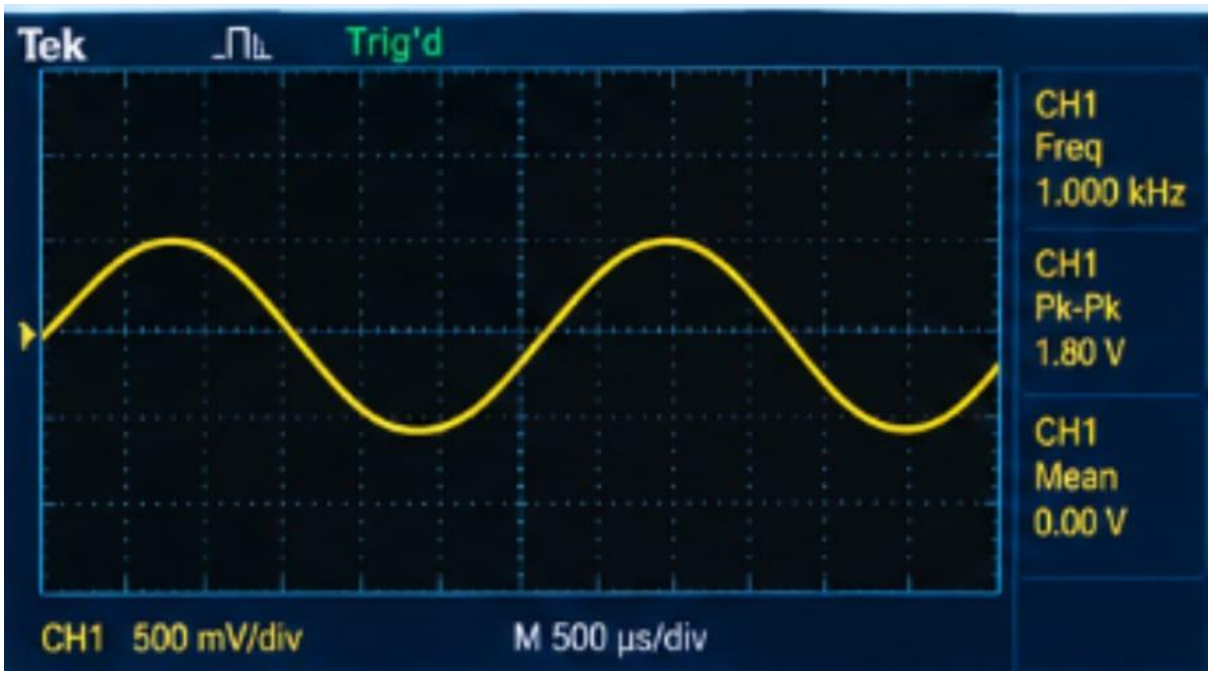

COMPARISON : MESSAGE VS DEMODULATED SIGNAL :

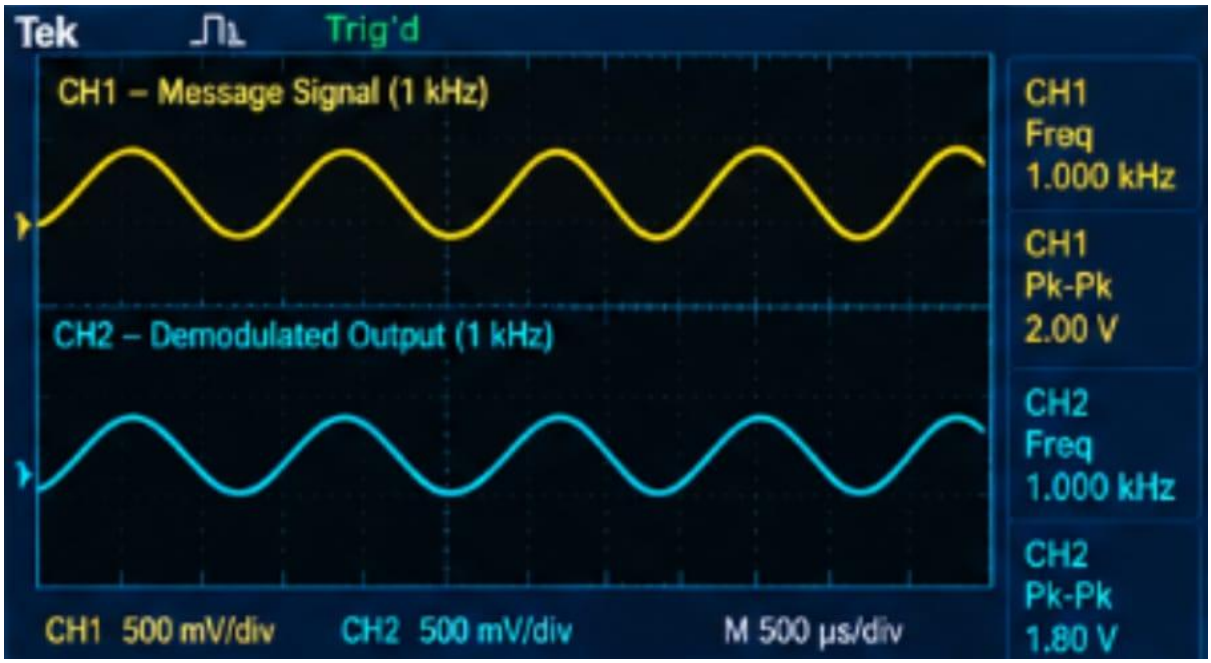

AM ENVELOPE :

