


How ARP works

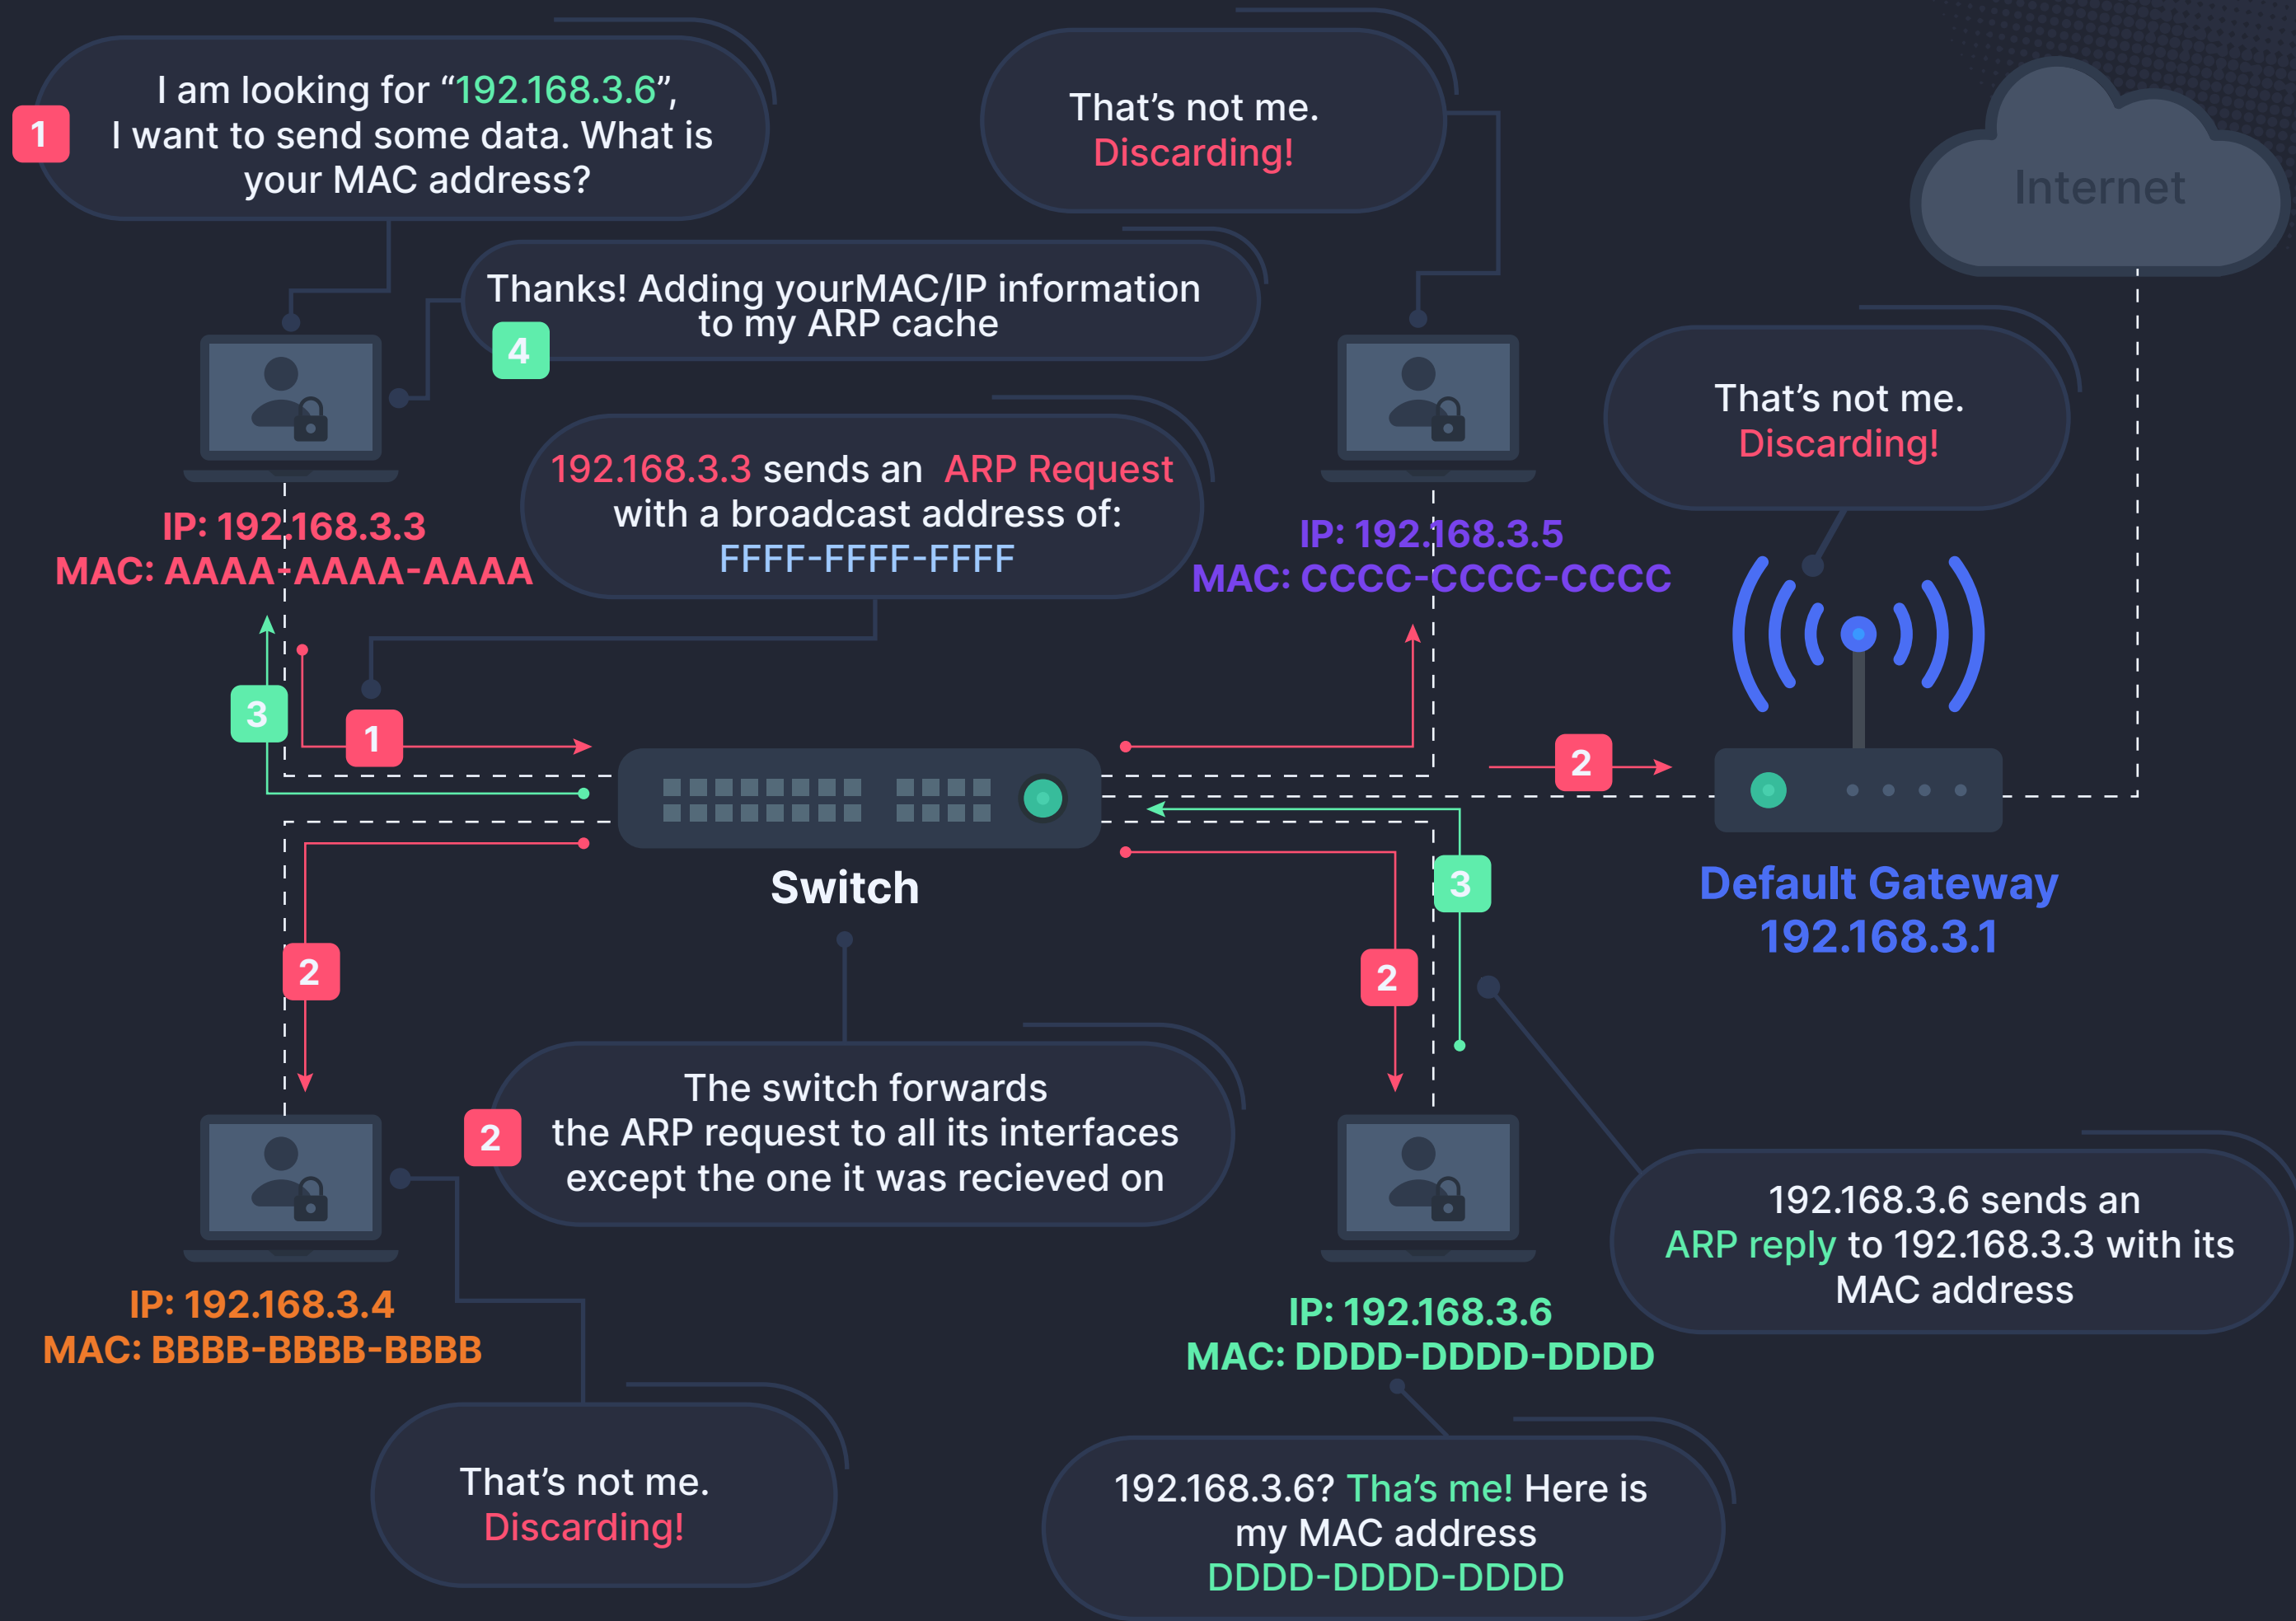

A / R / P

(**A**ddress / **R**esolution / **P**rotocol)

Used to map an IP address to a MAC address and operates at the Data Link layer (Layer 2) of the OSI model

ARP REQUEST PACKET

SOURCE IP	DESTINATION IP	SOURCE MAC	DESTINATION MAC
192.168.3.3	192.168.3.6	AAAA-AAAA-AAAA	FFFF-FFFF-FFFF
SOURCE IP	DESTINATION IP	SOURCE MAC	DESTINATION MAC
192.168.3.6	192.168.3.3	DDDD-DDDD-DDDD	AAAA-AAAA-AAAA

ARP REPLY PACKET