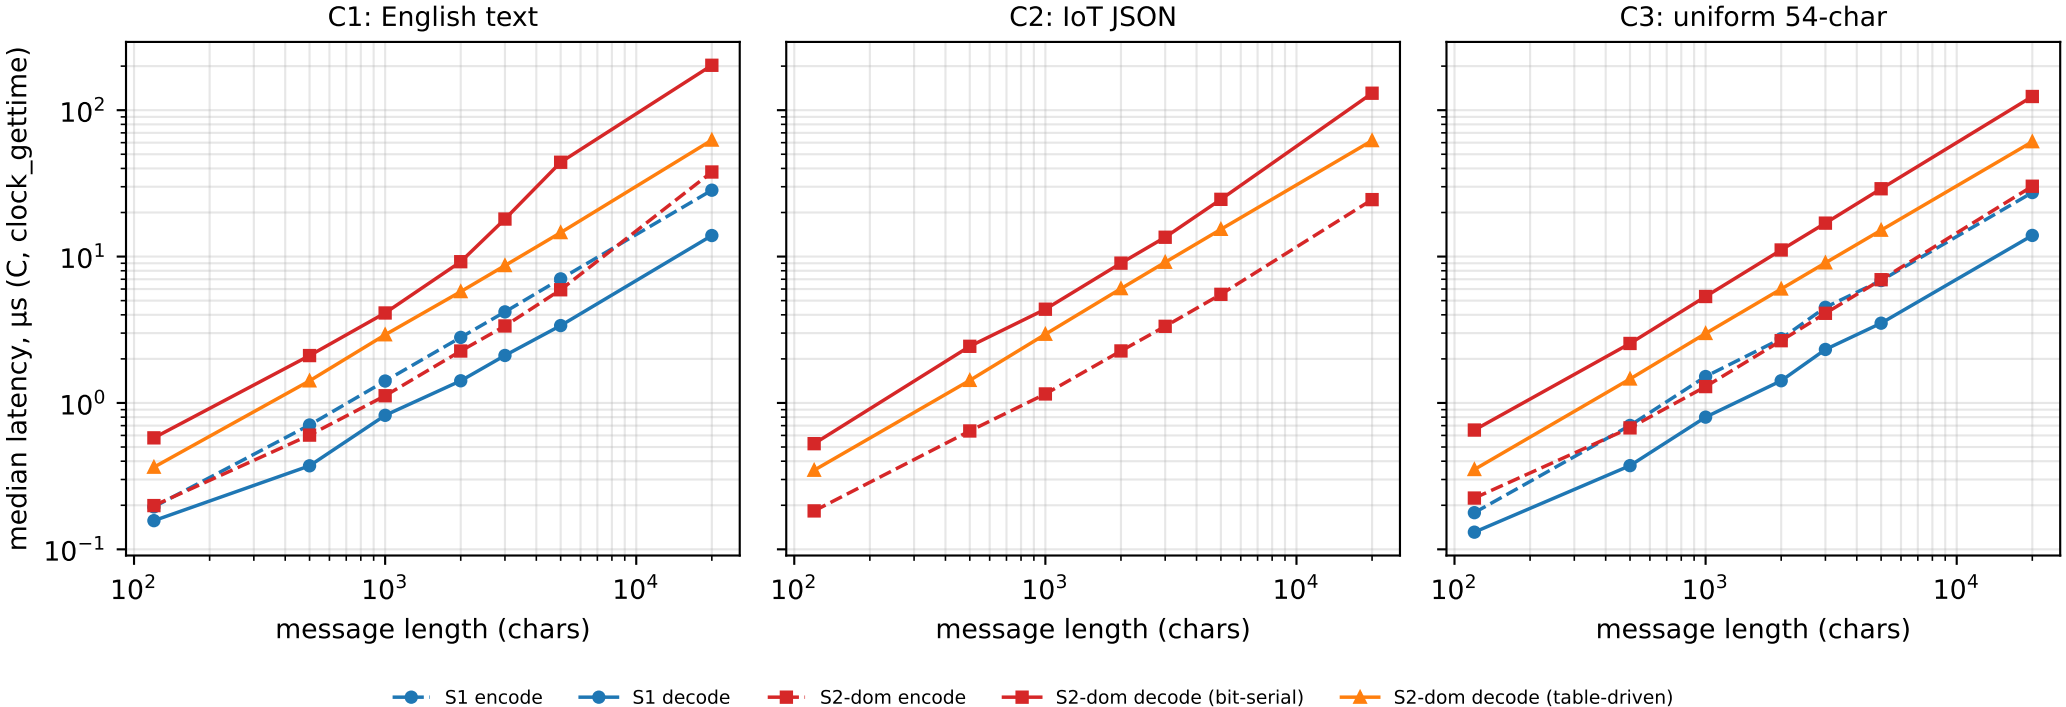
C1: English text
C2: IoT JSON
C3: uniform 54-char
median latency, µs (C, clock_gettime)
message length (chars)
S1 encode
S1 decode
S2-dom encode
S2-dom decode (bit-serial)
S2-dom decode (table-driven)