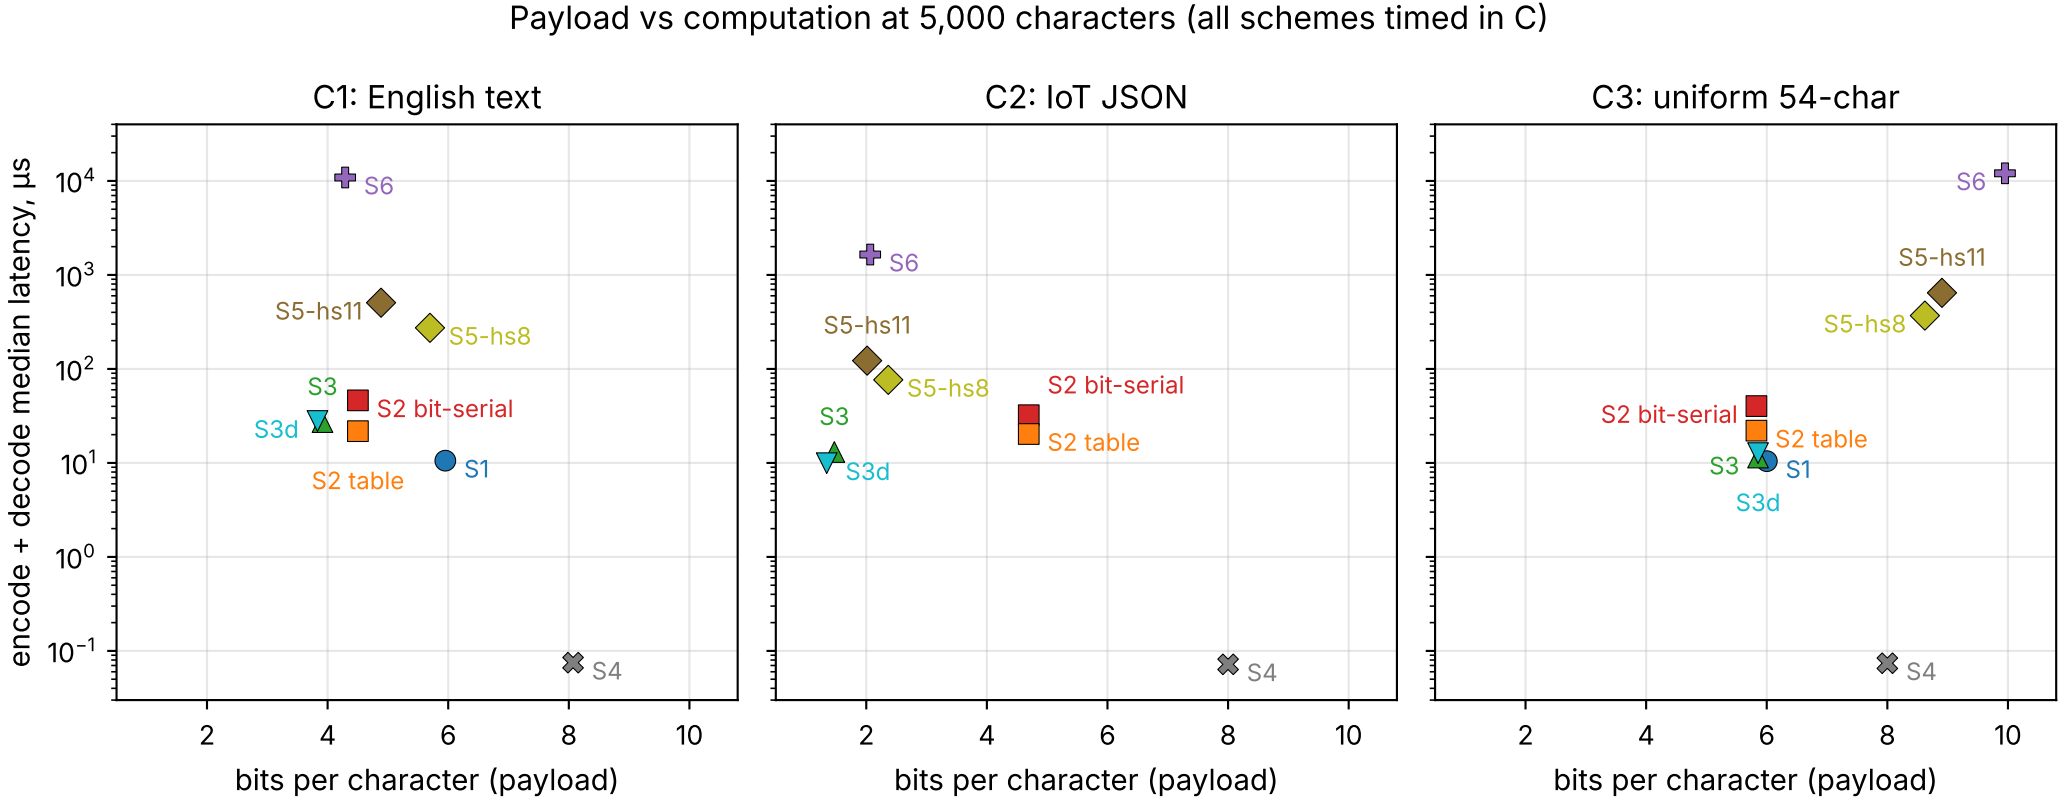
Payload vs computation at 5,000 characters (all schemes timed in C)
C1: English text
C2: IoT JSON
C3: uniform 54-char
encode + decode median latency, µs
bits per character (payload)
S6
S5-hs11
S5-hs8
S3
S2 bit-serial
S3d
S2 table
S1
S4