



# ICETRO

## Ice Cube Machine



**Self-contained Type**

### SCI-120A

#### Feartures

- **Production**
  - Produces up to 125Kg (275.6lbs). of ice in 24hours.
- **Ice storage**
  - Ice storage capacity of up to 45Kg (99lbs).
  - High density urethane foaming insulation keep the ice for long.
- **Stainless steel exterior**
  - Durable & Rustless SUS304
- **Adjustable legs**
  - Levelers standard 0 to 50mm (2 inch)
- **Mechanical (Camtimer) control system**
- **CE & ETL approved**



**Individual cubes with unique bell shape**




**ICETRO**


78BL/3LT, 648-2, Kojan-Dong, Namdong-Ku, Incheon, South Korea  
TEL : +82-32-814-2160 Ext. 270, 272, 275 FAX : +82-32-814-1798  
WEB : [www.icemaker.co.kr](http://www.icemaker.co.kr) Email : [webmaster@icemaker.co.kr](mailto:webmaster@icemaker.co.kr)

**ISO 9001:2007  
REGISTERED**

# Drawings

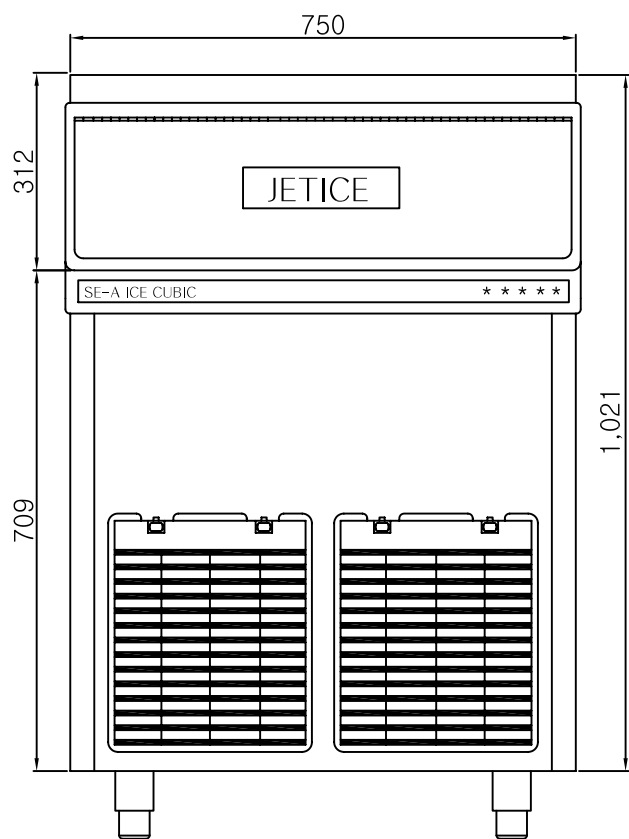

Front Side View

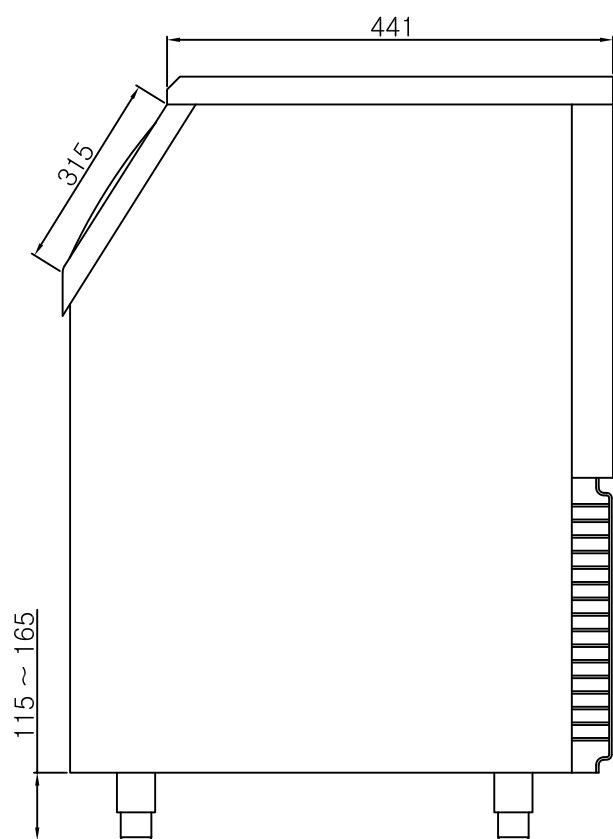

Left Side View

## Exterior

Dimensions	Net.		Gross.	
	mm	inch	mm	inch
Width	750	29.6	780	30.7
Depth	656	25.9	730	28.8
Height	1136	44.8	1120	44.1

Weight	Net.		Gross.	
	kgs	lbs	kgs	lbs
	102	199	110	243
Volume	-		0.70 cu.m	

## Electrical

Power consumption	1400 Watt
Voltage	115V/60Hz/1PH
	208~230V/60Hz/1PH
	220~240V/50Hz/1PH

\*Product`s exterior and specifications can be modified without prior notice.

## Specifications

Compressor	1.0HP, 12800BTU/h - Embraco
Refrigerant	R-404A
Condenser	Air-cooled
Production	125kg/275.6lbs up to per day
Storage bin	45kg/99.2lbs up to
Ice cubes	60ea/cycle

\*BTUs may vary depending on compressor used.  
\*Production Capacity may vary depending on ambient temperature.

## Operating Limits

- Ambient Temp Range  
10°C~38°C (50°F~100°F)
- Water Temp Range  
10°C~32°C (50°F~90°F)
- Water Pressure  
20psi~80psi (1.38bar~5.52bar)
- Voltage Range  
±10% from regular voltage

