


REV A SCHEMATIC REVIEW. NO PCB LAYOUT OR FABRICATION RELEASE.


2.4 GHz LoRa or FLRC card, same hardware


Local labels connect equal names. NC marks deliberate unused module pins.
Selected parts: see BOM, FOOTPRINT_REVIEW.md and ASSEMBLY_NOTES.md.

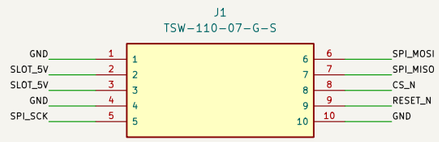

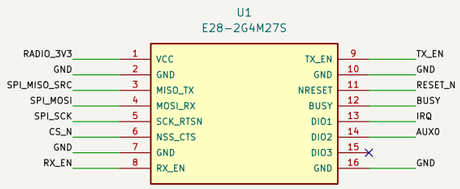







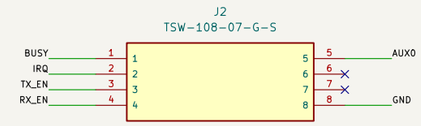



ASSEMBLY VARIANT: IPEX ONLY. Selector MUST match manual section 9.2 right image.
MCP23S17 controls TX_EN/RX_EN before RF commands. No automatic RX/TX modes.
Buck PCB layout must follow figure 25, 2 oz copper on both layers.















































MISO: source -> 22R -> slot A7. Fit 0R option; scope/IBIS verify.
Place at module output/socket, before shared bus. No long stubs.

KEYED SLOT: H1 engages the carrier M3 x 25 post before electrical contact.
All headers and passives factory fitted. No user soldering or antenna-selector rework.
Power declarations describe power arriving through the slot and buck output after L1.
No PCB layout is authorized. Footprint and assembly evidence: see DESIGN_REVIEW.md.

SCHEMATIC REVIEW — NOT FOR FABRICATION

Sheet: /
File: e28-2g4m27s-rev-a.kicad_sch

Title: 2.4 GHz LoRa or FLRC card, same hardware

Size: A3	Date: 2026-09-17	**Rev: A-schematic**
KiCad E.D.A. 10.0.6		Id: 1/1