THESE MORTAL COILS
FLIPPERS

Created by:

the-control-cabinet
Martafix

Join our Discord Server !!
https://discord.gg/MWKnDhy2K

WARNING:
Diagram for illustrative purposes only.
Practical application is at your own risk.
Read the full disclaimer before proceeding.




10 AWG



Inline Fuse Holder

10 AWG



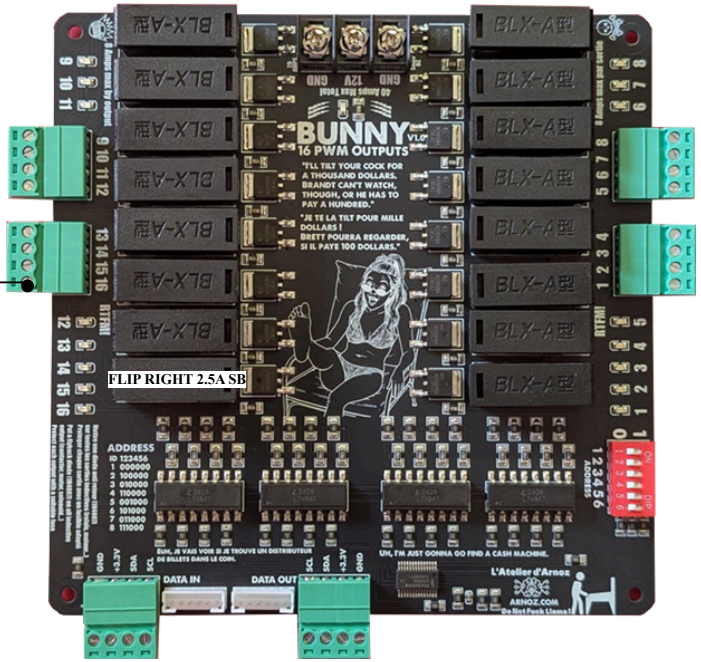


18 AWG

OPTION 3:
Blue Coil Assembly +
CSD Coil Life Extender

N.O.
EOS Leaf not wired


Security Delay ~60s
FallOff Delay = Infinity
FallOff Value N/A

18 AWG

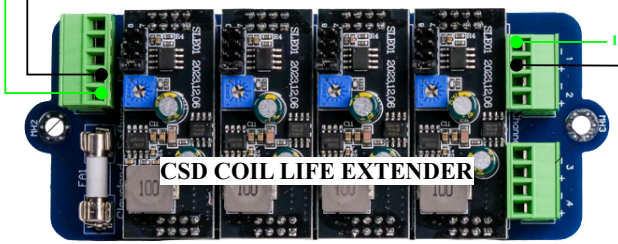

18 AWG

18 AWG

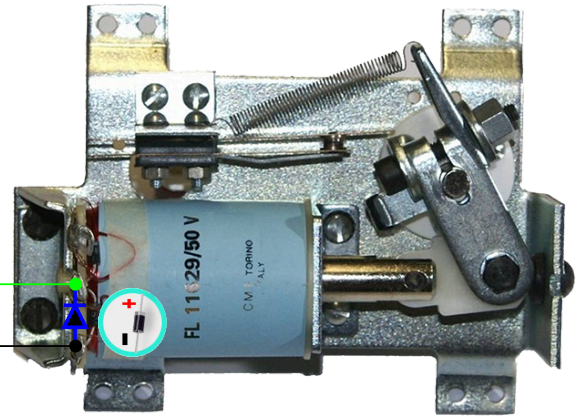

The potentiometer must be adjusted to reduce the output voltage (and therefore current) until the flipper drops, and then increasing it by half a turn. This should provide enough current to keep it active after the set activation time (ranging from 25ms to 200ms).