



J1
FPC-1x40-P0.5mm-F2.0mm-S3.3mm-RL

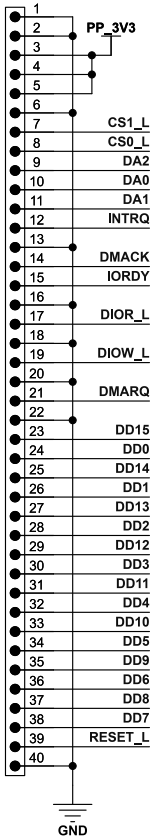

DESIGN NOTE:
IOCS16_L is grounded on the iPod flex (632-0259).

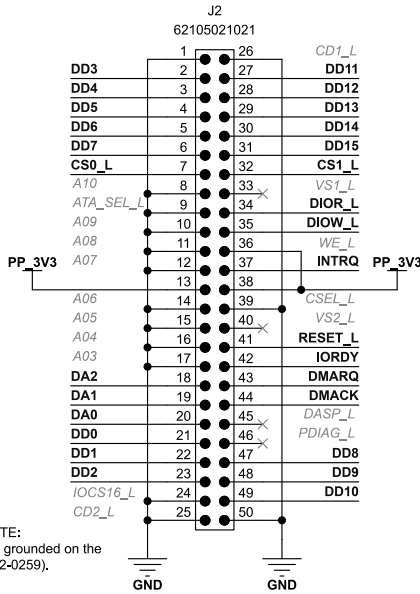

DESIGN NOTE:
Voltage sensing (VS1, VS2) is not Implemented by the host.

WE_L should be tied to VCC by the host.

CSEL_L Low = Master

The CompactFlash specification marks pins 43 and 44 as Reserved for Future Use (RFU), however other sources show these pins connected to DMARQ and DMACK, respectively.

DASP_L and PDIAG_L are not connected on iPod.



The information contained in these documents has been generated via reverse-engineering of publicly available material, and is provided without warranty or guarantee of accuracy. The Electron Vault is not responsible for any losses or damages caused to equipment as a consequence of its use.

Title: iPod 4th Generation CF Flex			Part Number: TEV-AAPL-FPC-00001		
Root					
Size: A3		Date: 2026-01-10		DWG Rev: A	
File: TEV-AAPL-FPC-00001.kicad_sch				Rev: A	
				Sheet: 1/1	