


PB-4B Series 0.4mm Pitch, 1.2mm Stacking Height

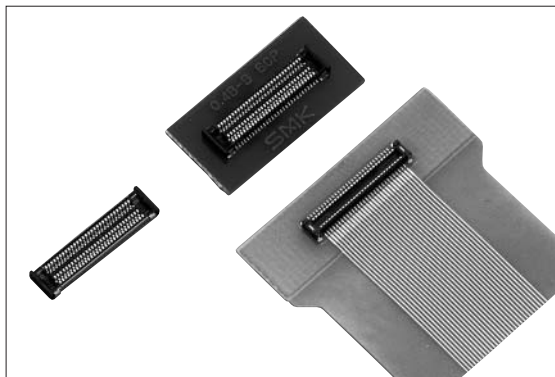


Features

1. 3.7 mm width and 1.2 mm height when mated, a good choice for equipment downsizing.
2. Sufficient over lapped range for improved contact reliability despite the low profile.
3. Shielded type socket provides EMI solutions and high-speed transmission.
4. Added mating strength due to locking mechanisms of hold down(reinforcement), and presence of positive clicking feeling.
5. Absorbed $\pm 0.4\text{mm}$ gap while mating plug and socket.
6. Connectors for test are available on each pins.

Specification


1. Rating : 0.3A, 50V AC/DC
2. Contact Resistance : $30\text{m}\Omega$ max., initially
3. Insulation Resistance : $100\text{M}\Omega$ min. at 100V DC
4. Withstanding Voltage : 100V AC (for one minute)
5. Operating Temperature Range : -40°C to $+85^{\circ}\text{C}$

Connection Diagram

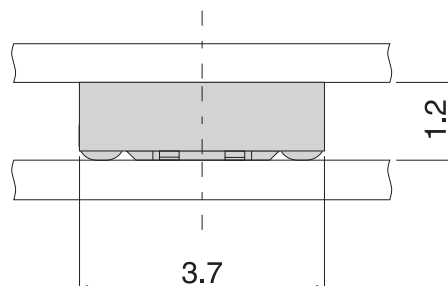


P.C. Board Dimension


Socket

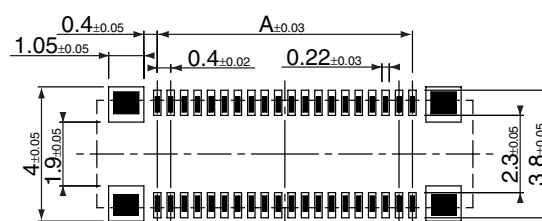

Socket (With Shield)

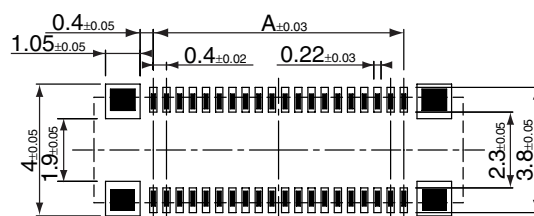

Plug

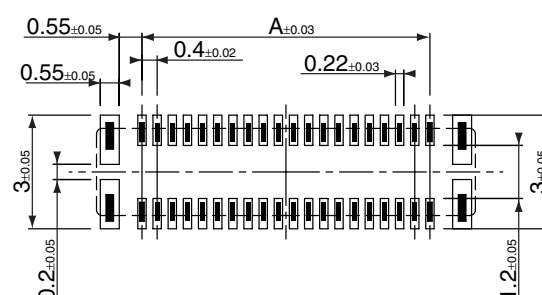


● Socket CPB 63□□-01□□F

No. of Pins	□□	A	B
12	12	2.0	5.6
20	20	3.6	7.2
26	26	4.8	8.4
30	30	5.6	9.2
36	36	6.8	10.4
40	40	7.6	11.2
50	50	9.6	13.2
60	60	11.6	15.2
80	80	15.6	19.2
100	91	19.6	23.2

■ Material and Plating

- Housing : Thermoplastic Resin, Black
- Contact : Cu Alloy, Au Plating
- Hold Down : Cu Alloy, Sn Plating

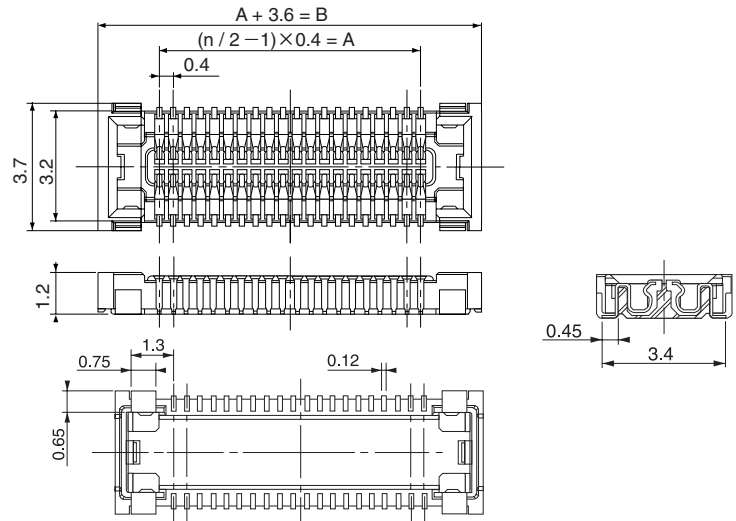


● Socket (With Shield) CPB 63□□-0202F

No. of Pins	□□	A	B
12	12	2.0	5.6
20	20	3.6	7.2
26	26	4.8	8.4
30	30	5.6	9.2
40	40	7.6	11.2
60	60	11.6	15.2
100	91	19.6	23.2

■ Material and Plating

- Housing : Thermoplastic Resin, Black
- Contact : Cu Alloy, Au Plating
- Hold Down : Cu Alloy, Sn Plating
- Shield Plate : Stainless Steel(SUS)

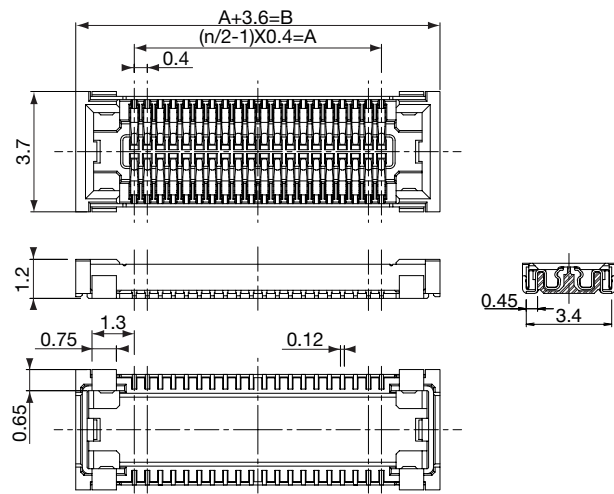


● Plug CPB 64□□-01□□F

No. of Pins	□□	A	B
12	12	2.0	4.4
20	20	3.6	6.0
26	26	4.8	7.2
30	30	5.6	8.0
36	36	6.8	9.2
40	40	7.6	10.0
50	50	9.6	12.0
60	60	11.6	14.0
80	80	15.6	18.0
100	91	19.6	22.0


■ Material and Plating

- Insert Mold : Thermoplastic Resin, Black
- Contact : Cu Alloy, Au Plating
- Hold Down : Cu Alloy, Sn Plating

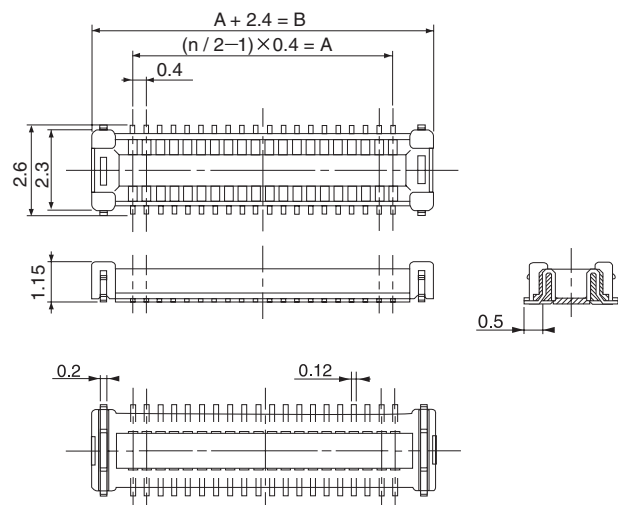


Dimensions of Reels and Tapes (JIS Standard)

● Socket

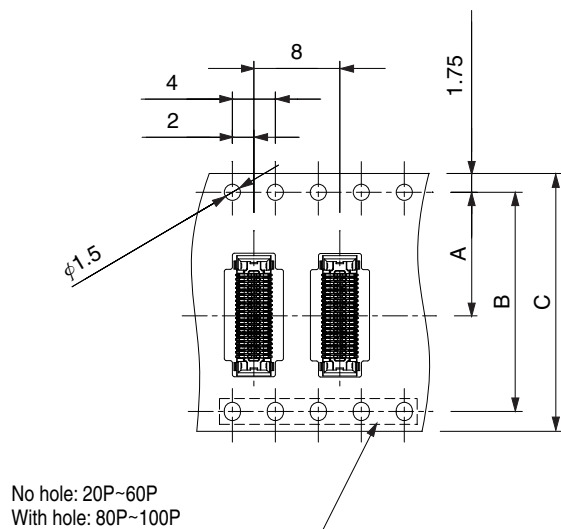

No. of Pins	□□	A	B	C
12	12	7.5		16.0
20	20			
26	26			
30	30			
36	36	11.5		24.0
40	40			
50	50			
60	60			
80	80	14.2	28.4	32.0
100	91	20.2	40.4	44.0

● Plug

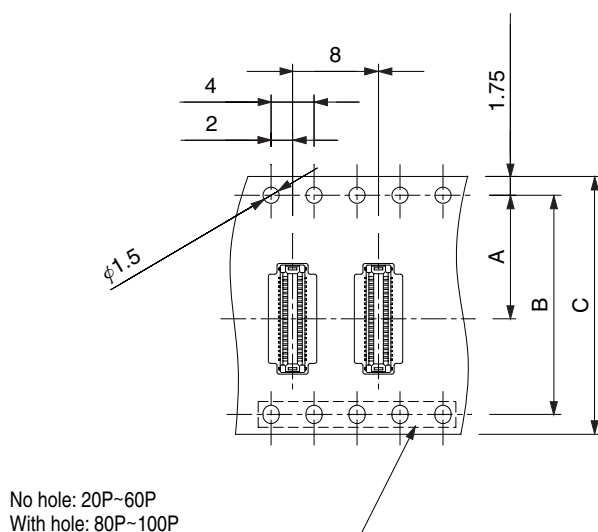

No. of Pins	□□	A	B	C
12	12	7.5		16.0
20	20			
26	26			
30	30			
36	36	11.5		24.0
40	40			
50	50			
60	60			
80	80	14.2	28.4	32.0
100	91	20.2	40.4	44.0

■ Reel Dimension

4,000pcs/reel

(Socket, Plug)

