


1. Frame and plywood

QTY = total for BOTH doors

Stock in inches / feet. Cut lengths in cm; keep stock widths where stated.

F1 Frame uprights × 4

2 × 4 timber; actual 1-1/2 × 3-1/2 in




Cut length: 213.865 cm

CUT ONLY IF REPLACING

Keep stock width. Cut length and **3 half-laps**. Keep sound existing members.

F2 Frame cross rails × 6

2 × 4 timber; actual 1-1/2 × 3-1/2 in

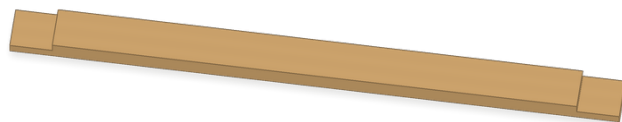

Cut length: 127.565 cm

CUT ONLY IF REPLACING

Keep stock width. Cut **full leaf width** and 2 end half-laps; retain sound rails.

P1 Outside main panels × 2

15/32 in exterior plywood; 4 ft wide



Cut length: 213.865 cm

YES - CUT HEIGHT

Shorten to the shown length. Keep the actual usable stock width.

P2 Outside infill strips × 2

15/32 in matching exterior plywood



Cut: 213.865 × 5.325 cm

YES - CUT TO SIZE

Cut width and length unless your existing strips fit. Support on timber.

P3 Inside main panels × 2

1/5 in inner plywood; 4 ft wide



Cut length: 213.865 cm

YES - CUT HEIGHT

Shorten to the shown length. Keep the actual usable stock width.

P4 Inside infill strips × 2

1/5 in matching inner plywood



Cut: 213.865 × 5.325 cm

YES - CUT TO SIZE

Cut width and length unless your existing strips fit. Support on timber.

2. Insulation, trim and joint

QTY = total for BOTH doors

Stock thickness in inches. Cut length × width in cm; seal is length only.

I1 Insulation inserts × 4

1-1/2 in rigid foam



Cut: 109.485 × 93.298 cm

YES - CUT RECTANGLES

Cut length and width. Fit flush in the actual frame cavities.

T1 Vertical white trim × 4

Model thickness: approx. 0.236 in*




Cut: 213.865 × 7.5 cm

YES - CUT TO SIZE

Cut length and width. One at each vertical edge of each door.

T2 Horizontal white trim × 6

Model thickness: approx. 0.236 in*



Cut: 112.565 × 7.5 cm

YES - CUT TO SIZE

Cut length and width. Three between the vertical trims on each door.

C1 White center cover × 1

Model thickness: approx. 0.236 in*



Cut: 213.865 × 6 cm

YES - CUT AND FIT

Cut length and width; fit both ends. Attach to the **RIGHT door only**.

C2 Center-cover spacer × 1

Model thickness: approx. 0.118 in*



Cut: 213.865 × 3 cm

YES - CUT AND FIT

Cut length and width. Thickness follows the selected gasket; **RIGHT only**.

S1 Center rubber seal × 1

Model section: 0.866 × 0.118 in**



Cut length: 213.865 cm

CUT TO LENGTH ONLY

Choose the seal profile, then cut its length. **Do not cut its width** to this model.

*Model thicknesses are not exactly 1/4 in or 1/8 in; measure actual stock. **Seal section is a compressed model, not a purchase specification. Confirm all cuts on the actual door.

3. Hardware and edge seals

QTY = total for BOTH doors

Imperial product sizes. Schematic examples; hardware remains to be selected.

H1 Load-bearing hinges × 6



Size in inches: to select

NO METAL CUTTING

Three per leaf shown. Confirm rating and timber backing before mounting.

H2 Door pulls × 2



Size in inches: to select

NO PART CUTTING

Use factory parts. Drill mounting holes to the selected template.

H3 Latch arrangement × 1



Size in inches: to select

NO PART CUTTING

Right active door. Fix to solid timber; fit to the selected template.

H4 Left-door bolts × 2




Size in inches: to select

NO PART CUTTING

One top and one bottom on the left leaf. Fit keepers to sound supports.

H5 Hold-open devices × 2

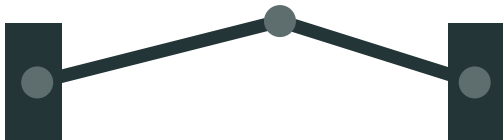

Size in inches: to select

NO PART CUTTING

One per leaf. Select and position for the actual outward swing.

H6 Perimeter seals × 5 runs



Cuts: head 257; sides 216 cm

YES - CUT TO FIT

Sides: **2 runs**. Bottoms: **2 × 127.565 cm** reference. Select profiles; measure final cuts.