


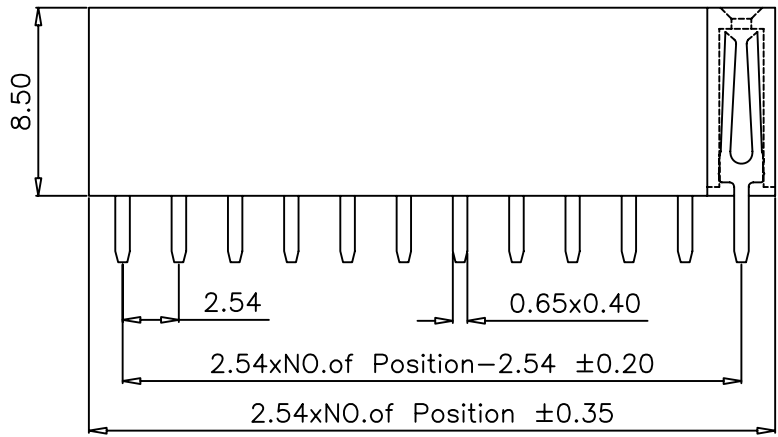



SPECIFICATIONS

Current Rating:3 Amps  
Insulator Resistance:1000 Megohms Min.  
Withstanding Voltage:550V AC/minute  
Temperature Range: -40~+105°  
Contact material:Brass  
Finish: Gold or Tin plated  
Insulator Material:PBT  
Soldering Temperature:+220°C,10S max



P.C.B LAYOUT

					OPERATION		DRAW	ROSE.W	2001.03.06	SCALE		 森康达电子有限公司	
					~ 10	±0.15	DESIGN			UNIT	mm	SCONDAR ELECTRONIC LIMITED	
					20 ~ 30	±0.30				SIZE	A4	PART NO.	FH254H850-ST-XXP
0	05/12/27	NEW			30 ~	±0.50	CHECK	MICKY	2001.03.06	SHEET	1/1	TITLE:	2.54mm Female Header Single Row Straight Dip Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2° TOL	APPROVE	HELLEN	2001.03.06	PROJ.	