





704920
704938
704946

SD Series Type SMT (Surface mounting technology)

■Features:

Possible to use it for any type of the ovens, such as the upheating type, the down-heating type, the side heating re-flow type, etc., because the heat-resisting mould (the knobs and the casing) having allowable high temperature up to 280 degree C is used.

— DIP Switches built-in the Earth Terminals —

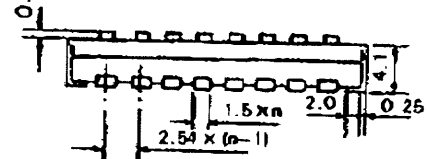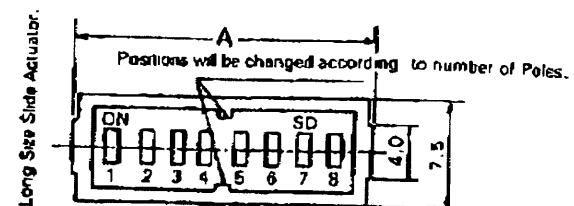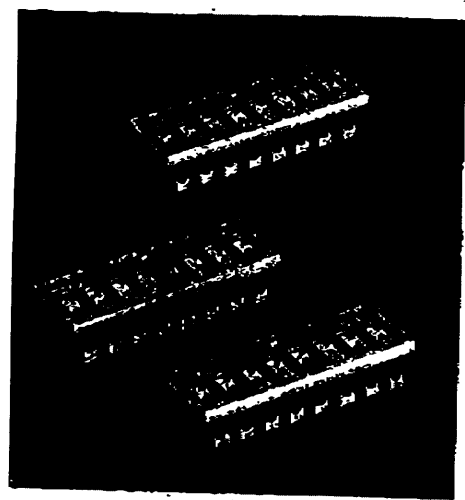

Type	Poles (n)	A dimension (mm)
SD-02	2	7.3
SD-03	3	9.9
SD-04 ⁷⁰⁴⁹²⁰	4	12.5
SD-05	5	15.0
SD-06	6	17.5
SD-08 ⁷⁰⁴⁹³⁸	8	22.5
SD-09	9	25.0
SD-10 ⁷⁰⁴⁹⁴⁶	10	27.5

Specification	
	100mA 50V DC on load
	25mA 25V DC on switching
	100mA 5V DC on switching
Contact resistance	50m Ω max.
Insulation resistance	300V DC, 100M Ω min.
Dielectric strength	300V DC, 1 minute
Durability	1,000 operations, min.
Operating force	800g max.