



ARDUINO NANO EVERY

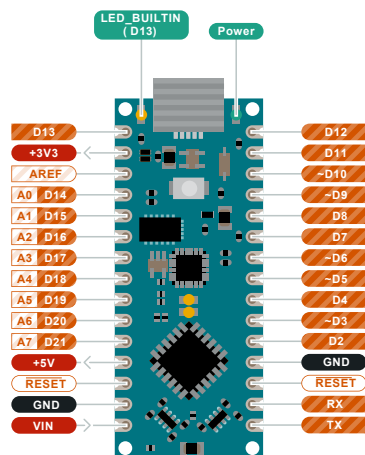

VIN 7-21 V input to the board.

⚠ MAXIMUM current per pin
40mA, 20mA recommended


ARDUINO NANO EVERY

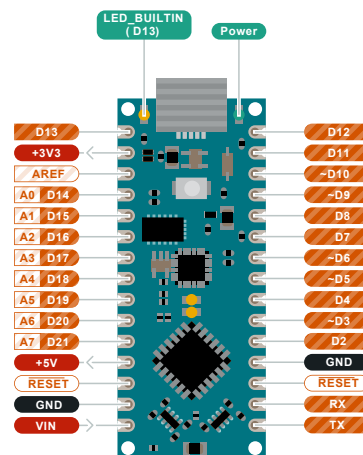

VIN 7-21 V input to the board.

⚠ MAXIMUM current per pin
40mA, 20mA recommended

ARDUINO NANO EVERY

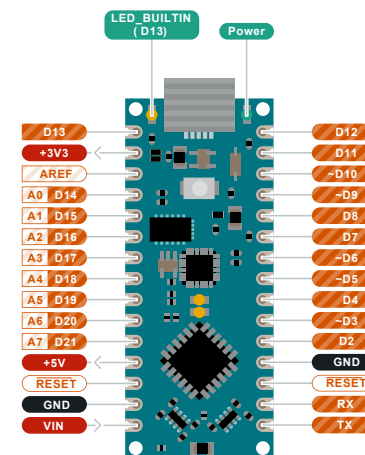

VIN 7-21 V input to the board.

⚠ MAXIMUM current per pin
40mA, 20mA recommended