

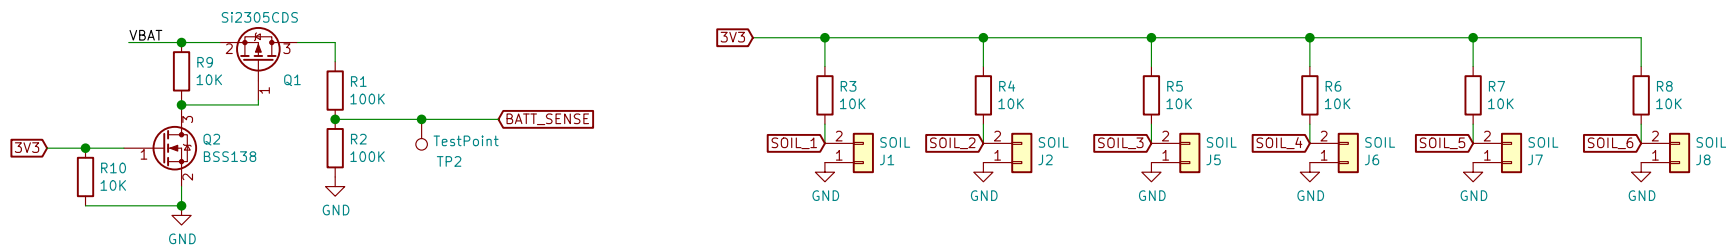


Sensors

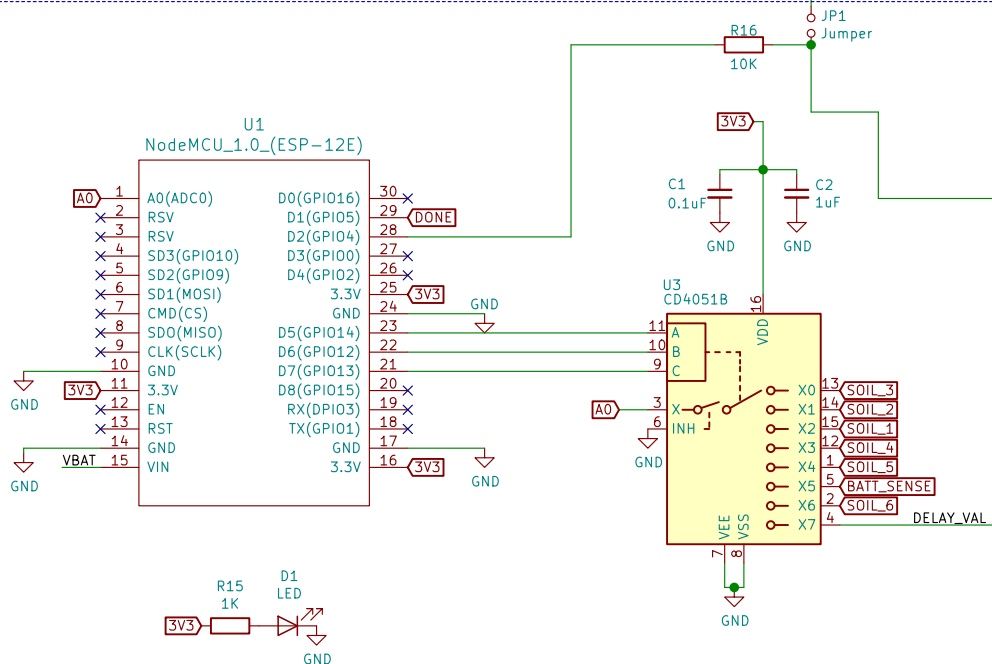


Power

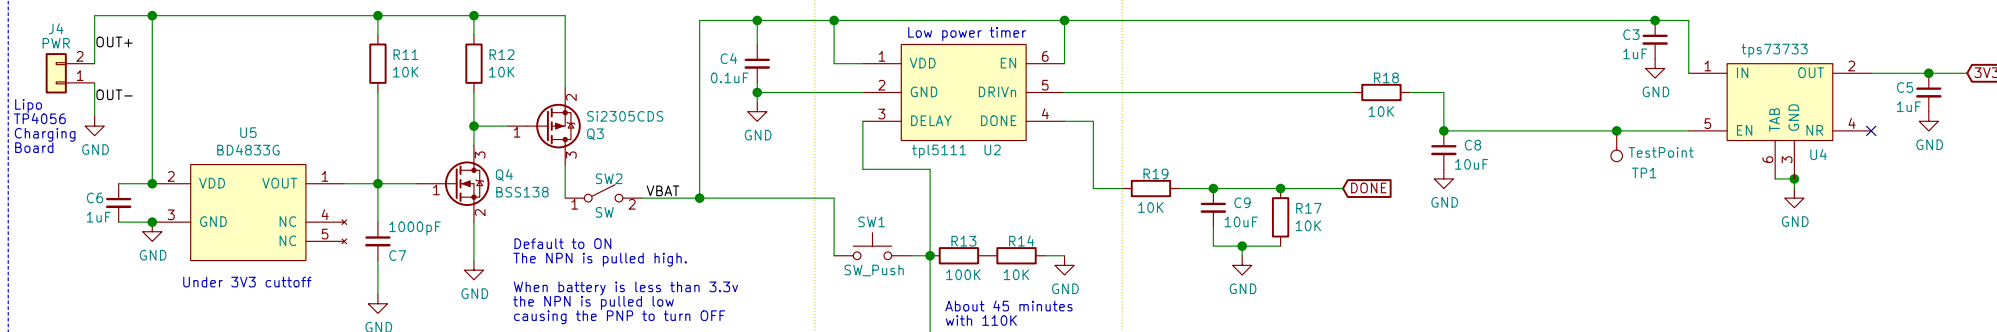

Mods

Remove the voltage regulator
that is on the NodeMCU
and disconnect the USB to UART chip.

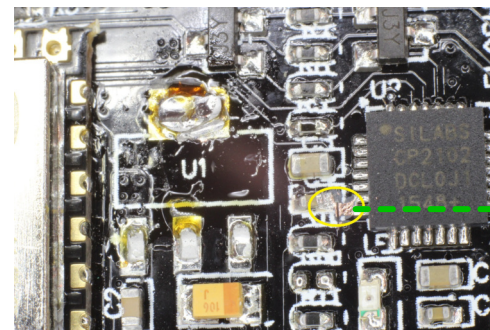

Connect the power pin of the USB to UART chip, with a bodge wire, to either off or on.

Sheet: /
File: transmitter.sch

Title: ESP8266 Sensor

Size: A4	Date:
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1	

Rev: 2.x
Id: 1/1