Battery box: scaled placement plan

Top view. Back at top; front service edge at bottom. Dimensions are inches. Equipment placement is proposed.

SCALE LIMIT: box, battery-case and board outlines use 1:4 geometry. Confirm the recorded case and board sizes.
Stud centers, breaker body, cable bends and mounting holes still need measurement. This sheet provides no drill or cable-cut dimensions.

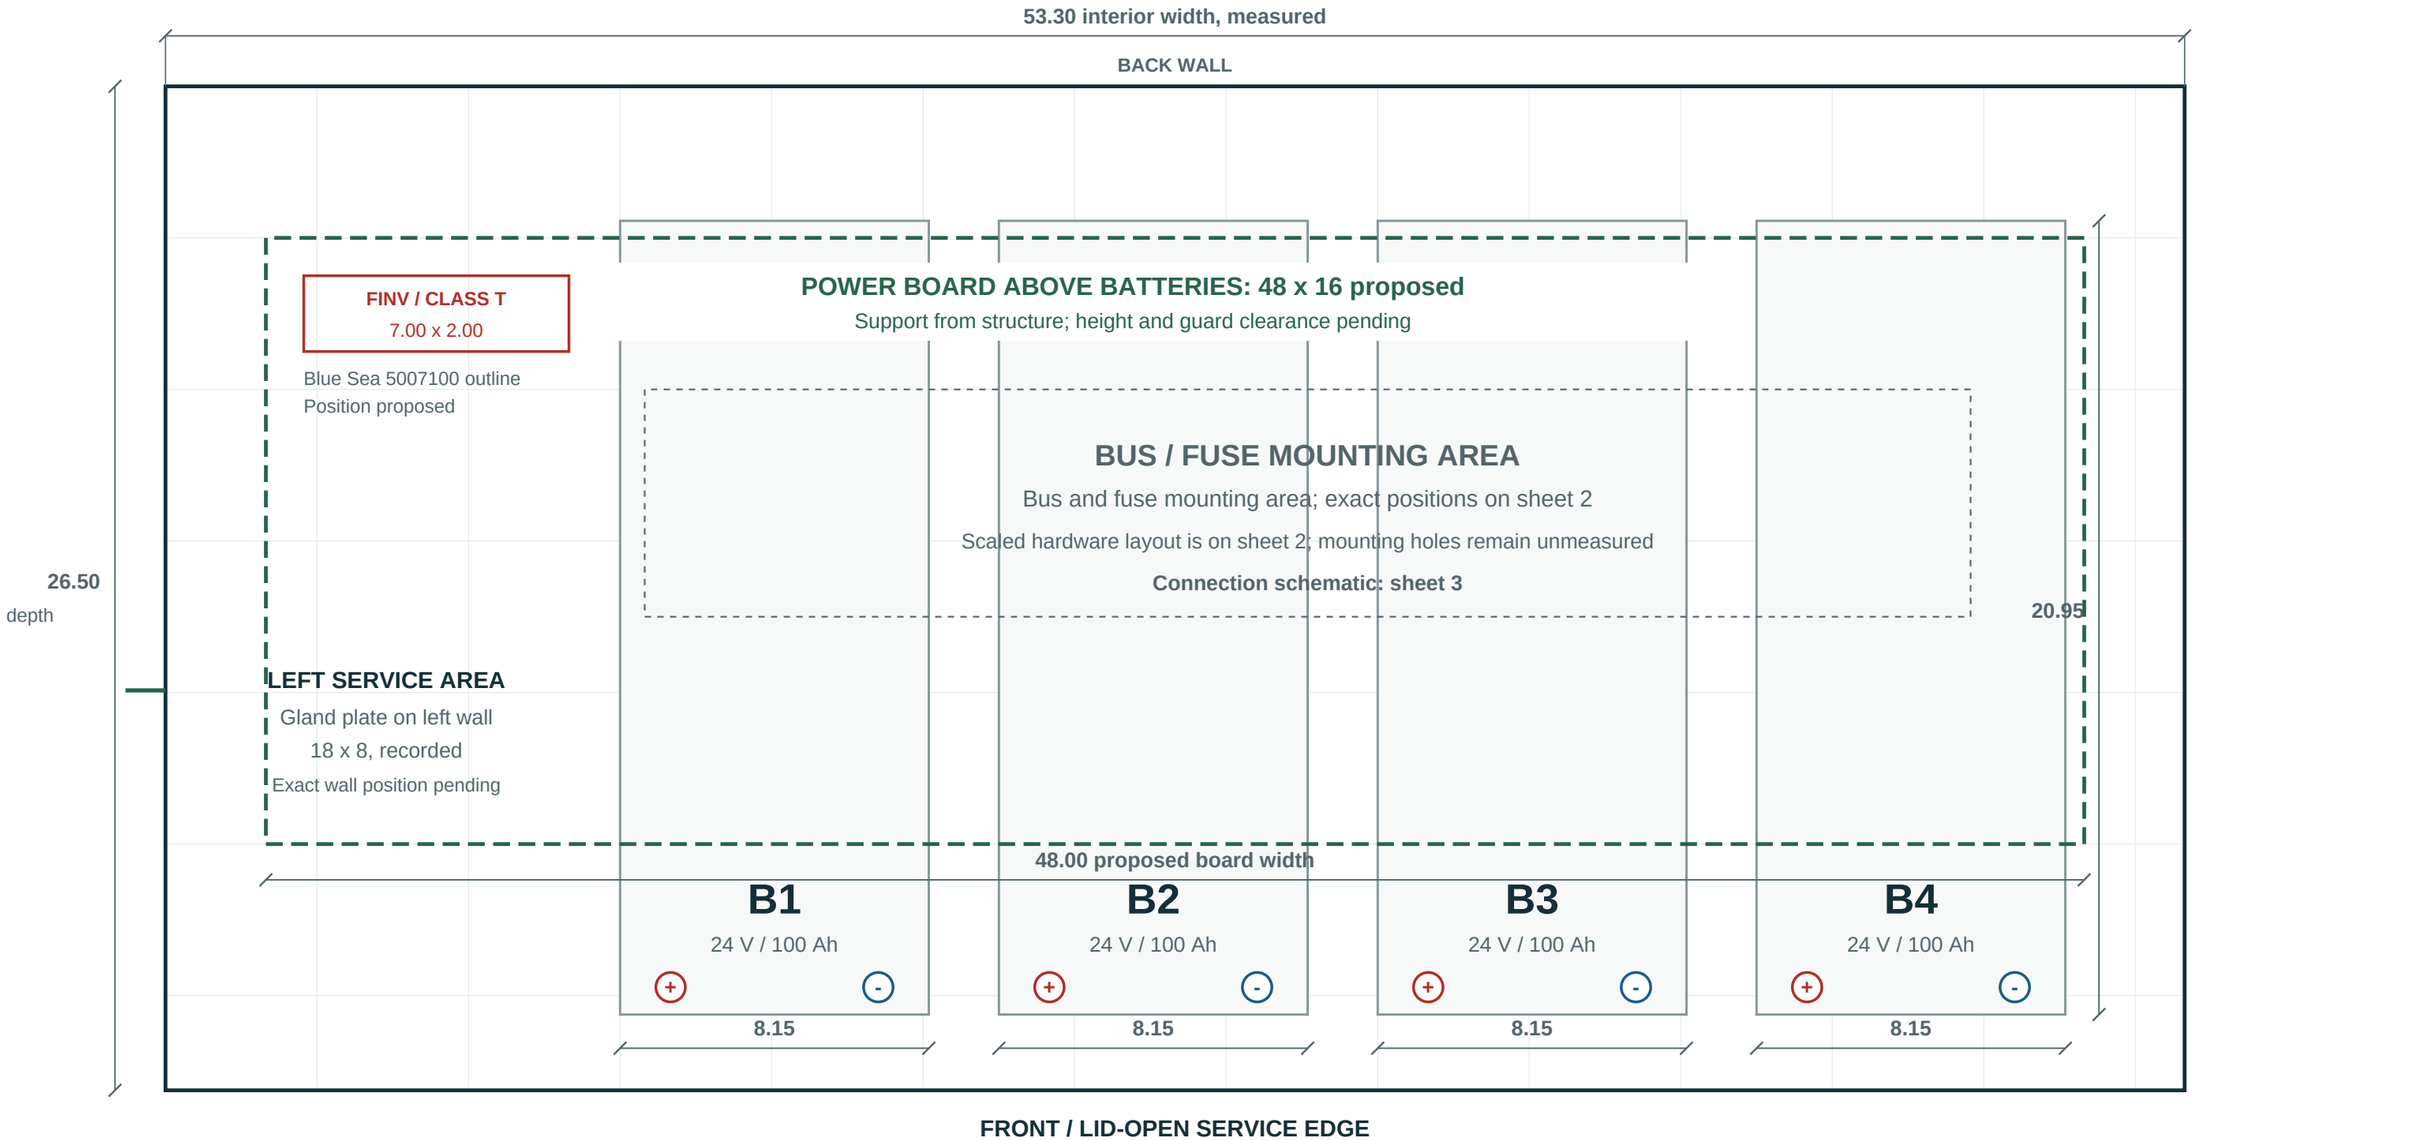

1:4 PRINT CHECK

0 — 4 — 8

8 real inches = 2 printed inches.
Print at 100% on 17 x 11 in paper.

Case dimensions are from the project record. Verify the actual packs.
Polarity circles identify connections; terminal centers are unmeasured.
Pack positions, gaps and board offset are proposals. Full-base support remains open.

Power board: scaled bodies and connection lines

1:4 body outlines on the proposed 48 x 16 in board. Top view; front at bottom. All positions are proposed.

Body sizes: supplied product drawings. Terminal dots: illustrative centers. Cable lines: connection routes, with bends and lengths unverified.
BULVACK has a reserved area because its body size is unknown. Covers, lugs, cable diameters and tool access need a dry fit.

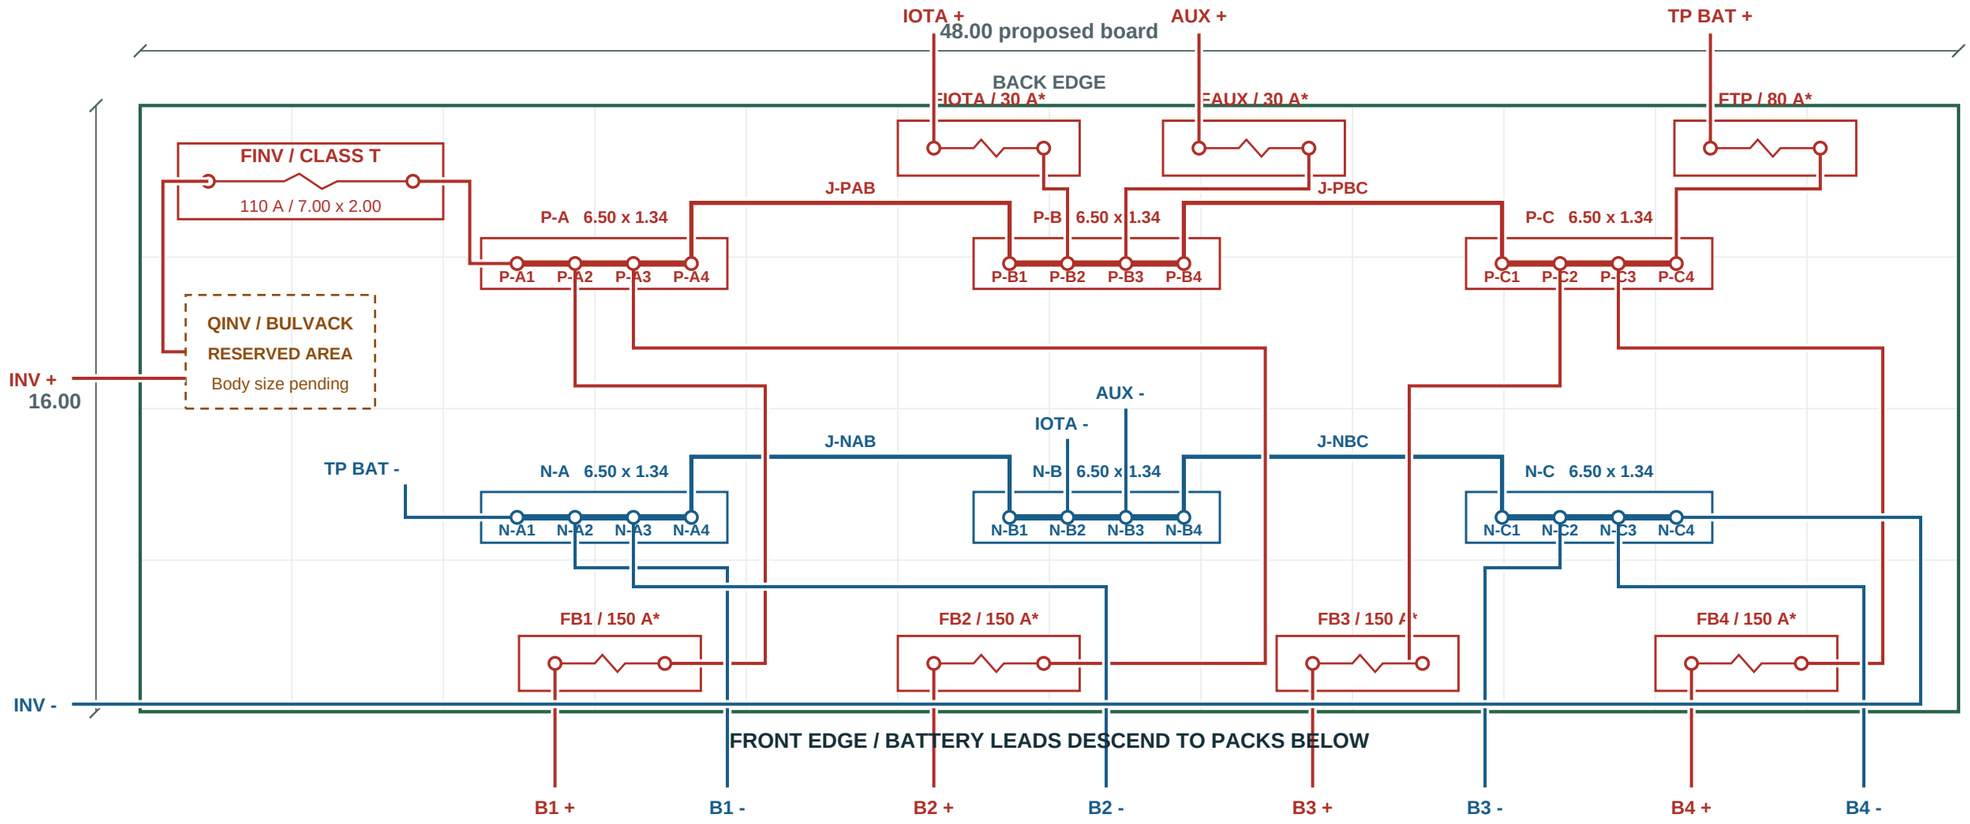

PRINT CHECK

8 real inches = 2 printed inches

SCALED BODIES

6 bus bars: 6.50 x 1.34 in. Listed cover height 2.09 in.

7 ANL holders: 4.80 x 1.45 in. Listed height 1.47 in.

Class T holder: 7.00 x 2.00 in. Published height 2.30 in.

CONNECTION LIMITS

White gaps at crossings represent separate insulated wires.

Only labelled studs and fuse terminals are connection points.

The 3.15 in ANL value is overall fuse length, not stud spacing.

Battery fuse source stubs need actual short routes to each pack.

Equal battery cable construction and current sharing need review.

* Fuse values remain proposals; the supplied ANL image shows a 60 A kit.

Product dimensions do not establish electrical approval or bend clearance.

Battery box: every electrical connection

Electrical schematic. Component symbols and wire paths are NOT TO SCALE. Stud labels match the online layout guide.

REFERENCE: body footprints are shown to scale on sheet 2. This sheet spaces the connections for tracing.
Lines show connections only. Final cable lengths, bends, protection and device ratings remain under review.

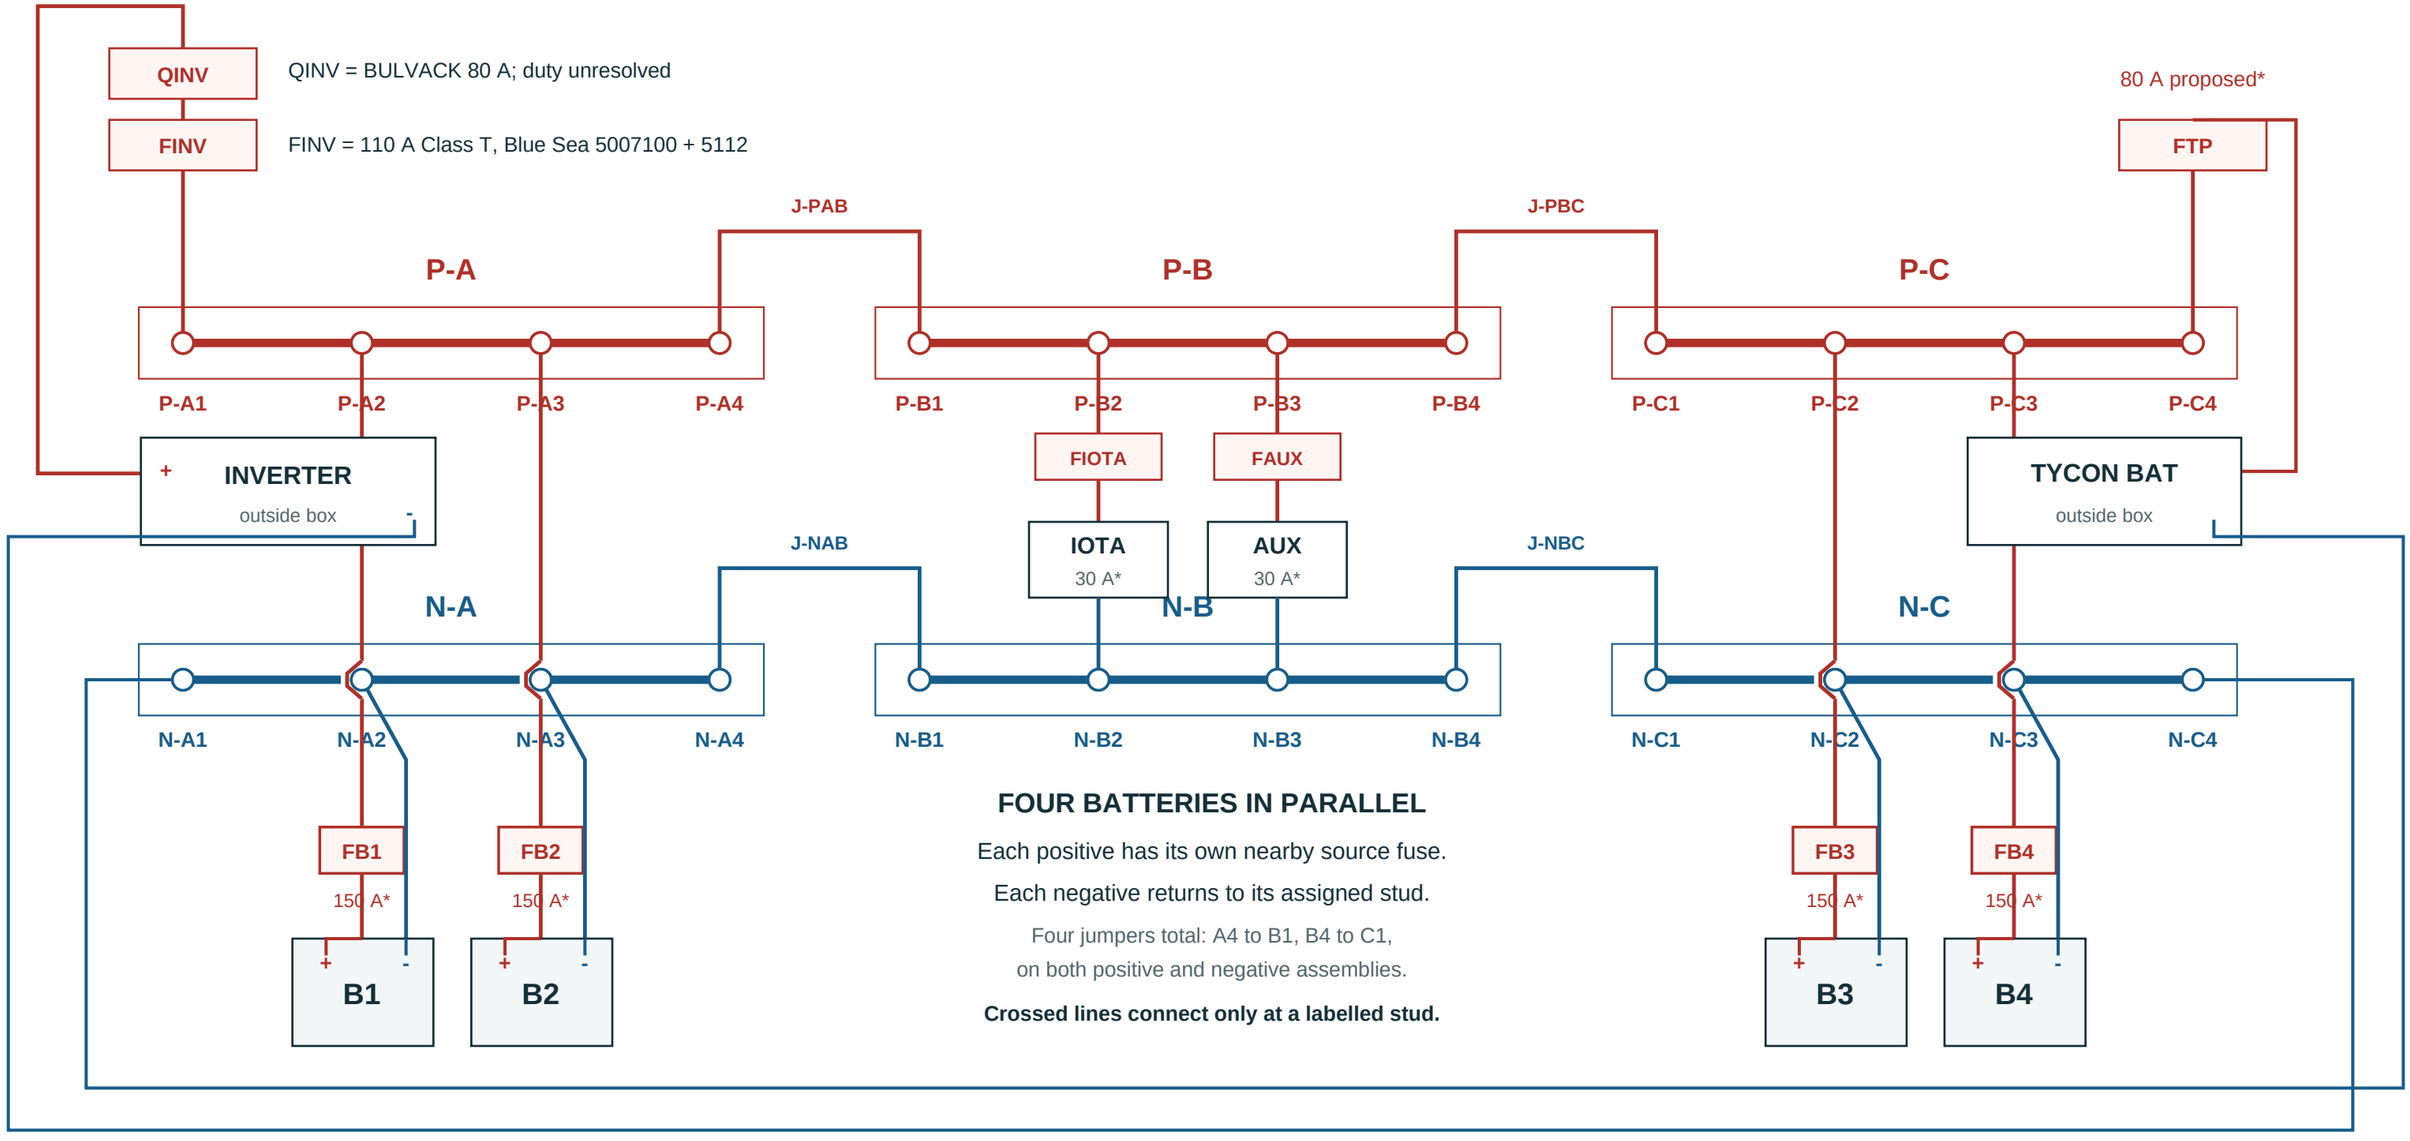

* Fuse values remain proposals. Review battery-branch protection for source current from either end.

EV200: outside this box, in PV positive between DIHOOL and Tycon PV+. Its coil supply comes from fused AUX control.

Body sizes: supplied product images; Class T: Blue Sea drawing 5007100. One lug per stud. No new negative-to-PE bond.