
GENERAL NOTES UNLESS OTHERWISE NOTED:

1. REFERENCE MountngBeam.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050 MM MAX
3. OVERALL PROFILE TOLERANCE | ⌓ | 0.1 | A | B | C | TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
4. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM

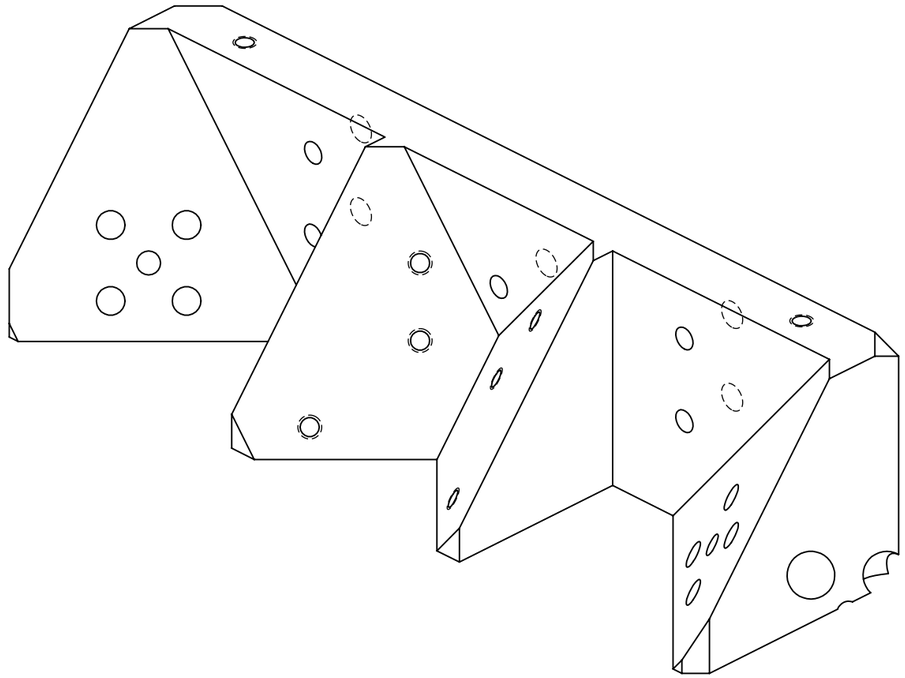

ANODIZATION: **BLACK TYPE II**	UNLESS OTHERWISE SPECIFIED	DRAWN BY	Hayden Reinhold	1/19/2022	
MATERIAL: **6061-T6 ALUMINUM**	DECIMAL: .X ± 0.1, .XX ± 0.01, .XXX ± 0.005 — ANGULAR: .X ± 0.1, .XX ± 0.01	CHECKED		1/19/2022	
FINISH: **125**	INTERPRET PER ASME Y14.5-2018	ENG APPR.			
WEIGHT: **48.87g**	DO NOT SCALE DRAWING	MFG APPR.			
		Reaction Wheel Mounting Bracket		DWG. NO. **MountingBeam**	
		UNITS: **MM**	REVISION: **A**	FORMAT: **B**	SCALE: **2:1** — PAGE: **1/4**

SOLIDWORKS Educational Product. For Instructional Use Only.