


GENERAL NOTES UNLESS OTHERWISE NOTED:


1. REFERENCE 1.5U_Y.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050MM MAX
3. ANODIZATION: TYPE II, BLACK
4. OVERALL PROFILE TOLERANCE ⌓ 0.1 | A | B | C TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
5. MACHINE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

REVISIONS				
REV.	DESCRIPTION	DATE	DRAWN BY	APPROVED BY
A	INITIAL COMMIT	10/11/2021	JACK PORTER	ANDREW GREENBERG
B	REVISED DRAWINGS FOR CLARITY	12/23/2021	JACK PORTER	ANDREW GREENBERG

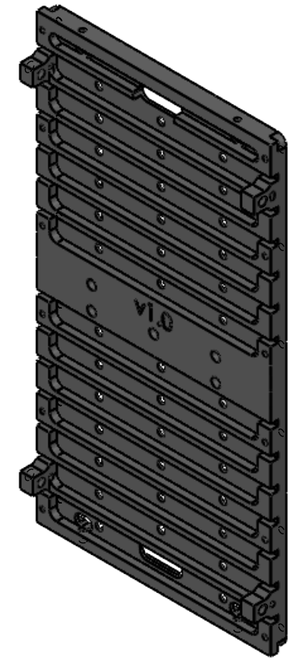

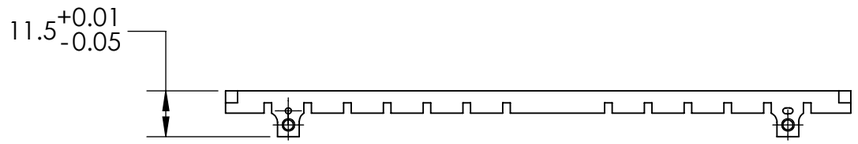

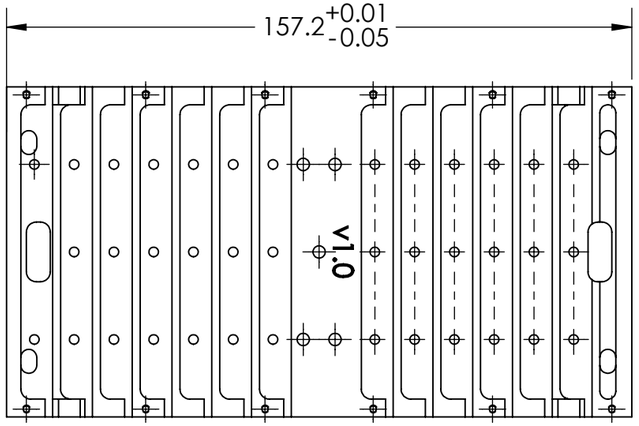



ANNODIZATION: BLACK TYPE II	UNLESS OTHERWISE SPECIFIED	DRAWN BY	JACK PORTER	2/22/2022			
MATERIAL: 6061-T6 ALUMINUM	DECIMAL: .X ± 0.1, .XX ± 0.01, .XXX ± 0.005 — ANGULAR: .X ± 0.1, .XX ± 0.01	CHECKED	HAYDEN REINHOLD	2/22/2022			
FINISH: 125	SURFACE ROUGHNESS: INTERPRET PER ASME Y14.5-2009	ENG APPR.					
WEIGHT (REF): 88.12 grams	DO NOT SCALE DRAWING	MFG APPR.					
		Y 1.5U Frame		DWG. NO. 1.5U_Y			
		UNITS: MM	REVISION: A	FORMAT: B	SCALE: 1:1.5	PAGE: 1/4	

SOLIDWORKS Educational Product. For Instructional Use Only.