

REV	DESCRIPTION OF CHANGE	REV BY	DATE

EDP CABLE

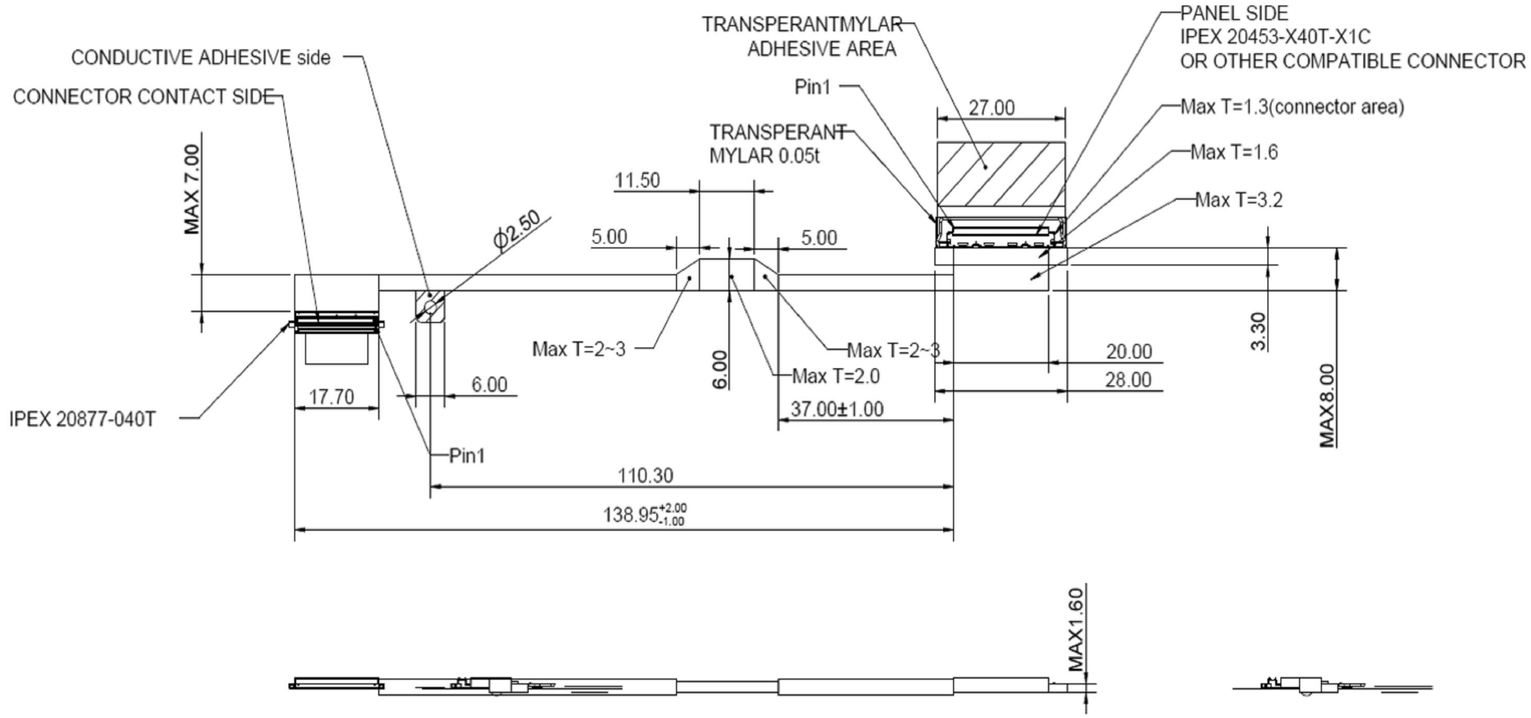

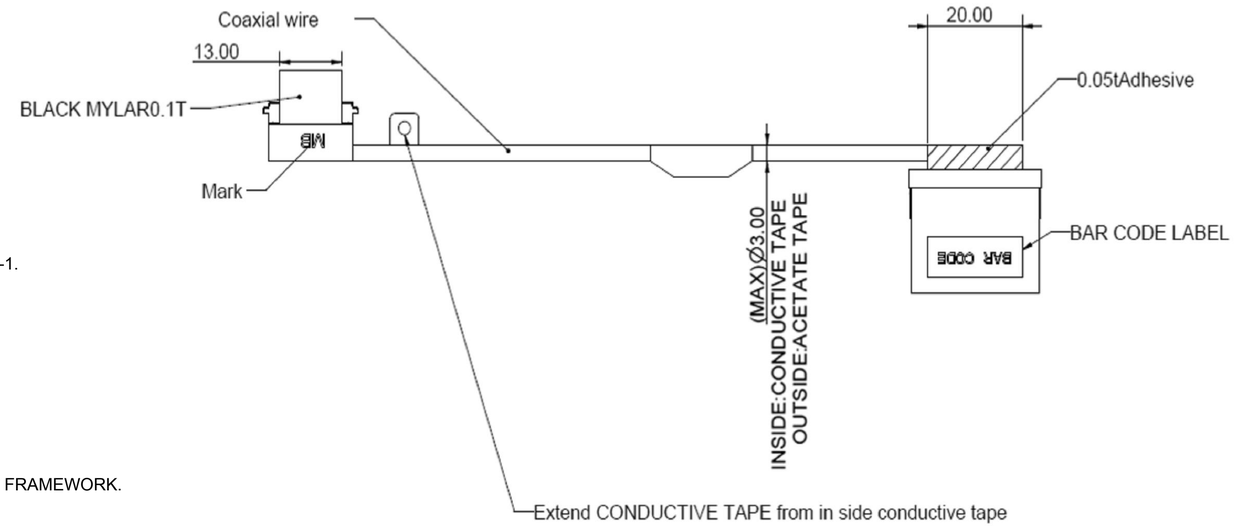

NOTE:
1.INTERPRET DIMENSIONS PER ANSI Y14.5M-1982
2.MATERIAL: TEFLON /COAXIAL CABLE WITH FPC
3.CONTACT PLATING : SEE THE NOTE.
4.NEED TO MEET THE REQUEST OF HALOGEN FREE AND IEC 60950-1 & IEC 62368-1.
NEED TO FLAME RETARD CLASS: UL94-V0 OR UPGRADE
5.NO CRACK AND BREAK ON FPC AFTER BENDING.
BENDING CONDITION: 10 TIMES, RADIUS 0.2mm WITH 180 DEGREE BENDING.
6.NO VIA HOLE AND TEST POINT ON FPC BENDING AREA.
7.FPC MUSH BE 100% ELECTRICALLY TESTED.
8.SOLDER PAD NOT ALLOW PEEL OFF DURING SOLDERING PROCESS.
SOLDER TEMPERATURE: 260°C, TIME: 5 SECONDS
9.IMPEDANCE (Rac): 85 ~ 110 ohm
10.RESISTANCE (Rdc): 85 ~ 110 ohm
11. ARE PROCESS CONTROL DIMENSION
ARE CRITICAL CONTROL DIMENSION
ALL DIMENSIONS ARE INCLUDE ID FINISH AND ALL PROCESS WHICH DEFINED BY FRAMEWORK.
12.NO SHOW DIMENSION AREA ACCORDING TO 3D file,
THE TOLERANCE IS 0.05 mm.
CENTER TOLERANCE ARE: THE TOLERANCE IS 0.05 mm
NO SHOW RADIUS AREA ACCORDING TO 3D file,
THE TOLERANCE ARE 0.1 mm.
13.THIS DRAWING STATES ONLY ADDITIONAL REQUIREMENTS
FOR ASSEMBLY. ALL PARTS IN THIS ASSEMBLY MUST
CONFIRM TO REQUIREMENTS STATED IN THEIR APPLICABLE
PART OR SUBASSEMBLY DRAWINGS.
14.ASSEMBLY SHALL CONFIRM TO ITEM LIST.
ALL PARTS NEED TO MEET THE REQUEST OF HALOGEN FREE
15.PARTS MUST BE PACKAGED SO AS TO PREVENT DAMAGE IN SHOPMENT AND HANDLNG.
16.ISOMETRIC VIEWS FOR REFERENCE ONLY.
17.GND PIN SHOULD BE CONTACT WITH CONDUCTIVE TAPE.

PART NUMBER	DESCRIPTION	SPECIFICATION

framework

UNLESS SPECIFIED TOLERANCE ARE: 300 ABOVE : ± 0.20; 300 ≥ X ≥ 150 : ± 0.15; 150 > X ≥ 50 : ± 0.10; 50 > X ≥ 20 : ± 0.075; 20mm BELOW : ± 0.05; ANGLES : ± 1° FLATNESS : ▱ 0.20 CONCENTRICITY : ± 0.05	DESIGNED BY	DRAWN BY
	CHECKED BY	APPROVED BY
MODEL	ISSUED DATE: Feb-02-23	SCALE: X / UNIT: mm
THIRD ANGLE PROJECTION	DRAWING FILE NAME: FW_13_5INCH_DISPLAY	
	SIZE: A1 / SHEET: 3 OF 3	REVISION VERSION: 0 0