THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF AUTERION AG.


REV STATUS OF SHEETS											
REV	-	-	-	-	-	-	-	-	-	-	
SHEET	-	-	-	-	-	-	-	-	-	-	

DWG NO: =DOC_NO_ASSY_DWG REV: 1.0.


REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
--	-	-----	--/--/--	-. -----
--	-	-----	--/--/--	-. -----
--	-	-----	--/--/--	-. -----
--	-	-----	--/--/--	-. -----

Dimensions [View from Top side (Scale 1:1)]

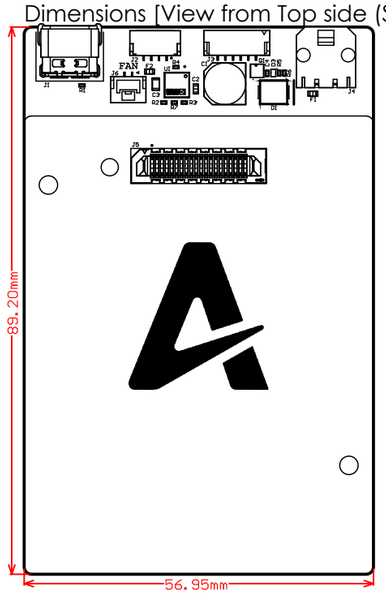

Drill Drawing View (Scale 3:2)

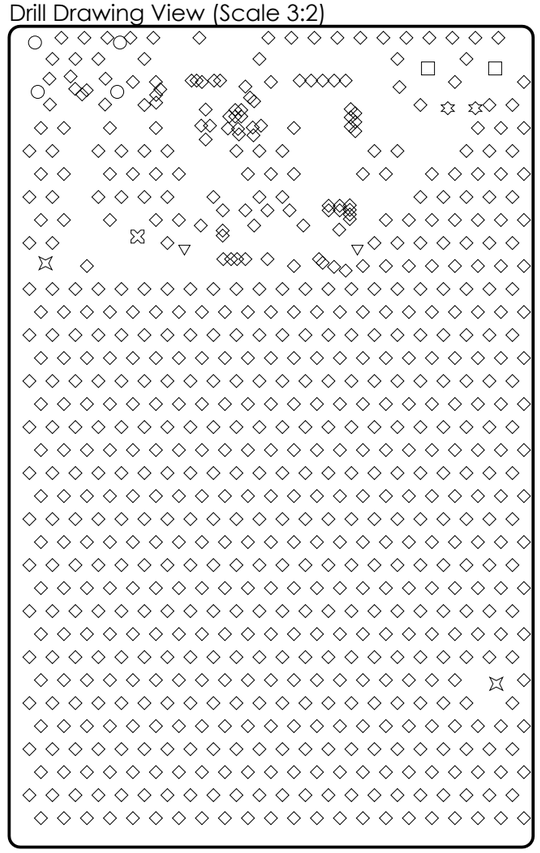

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
◇	715	0.20mm	Plated	
○	4	0.40mm	Plated	
✡	2	1.06mm	Plated	
▽	2	1.45mm	Non-Plated	
□	2	2.41mm	Plated	
⊠	1	3.00mm	Non-Plated	
⌑	2	3.20mm	Non-Plated	
	728 Total			

NOTES UNLESS OTHERWISE SPECIFIED:

1. MATERIAL: 1.59MM IN FIBERGLASS REINFORCED EPOXY, NEMA GRADE FR-4, NATURAL COLOR WITHOUT OPAQUER; 1 OZ COPPER CLAD ALL LAYERS. THE PRINTED WIRING BOARD MATERIAL MUST HAVE A COMPARATIVE TRACKING INDEX (CTI) OF AT LEAST 175 AND A UL 94V0 FLAMMABILITY RATING.
2. FINISH: ENIG PER IPC-4552.
3. ALL HOLES FINISHED SIZE AS SHOWN.
4. IPC 6012E CLASS 2
5. Compliance: RoHS
6. Bare board 100% continuity and open test
7. Matte black LPI solder mask, white legend
8. Impedance controlled per purchase order. Layer stack and Impedance chart for reference only, may adjust core material, thicknesses, and/ or widths to meet target impedances.

PART NO: 830-00011 v1.0.0

APPROVALS	DATE
ENGINEER: C. Dobler	C.
DESIGNER: C. Dobler	C.
CHECKER: D. Mani	D.

Reference Documents

BOM DOC:	830-00011
ASSY DOC:	830-00011
SCH DOC:	830-00011
PCB DOC:	830-00011

THIRD ANGLE PROJECTION

NEXT ASSY | USED ON

APPLICATION

Auterion

Auterion AG
Edenstrasse 20
8045 Zurich
Switzerland

DESIGN ITEM: FAB-830-00011 Microhard | DESIGN ITEM REVISION: 1.0.0

TITLE: 830-00011
Microhard Module Breakout Board

SIZE: A3 | CAGE CODE: =CAGE_CO | DWG NO: 830-00011 | REV:

SCALE: | FILE NAME: 830-00011 Microhard Module | SHEET: 1 OF 4

DWG NO: =DOC_NO_ASSY_DWG REV: 1.0.