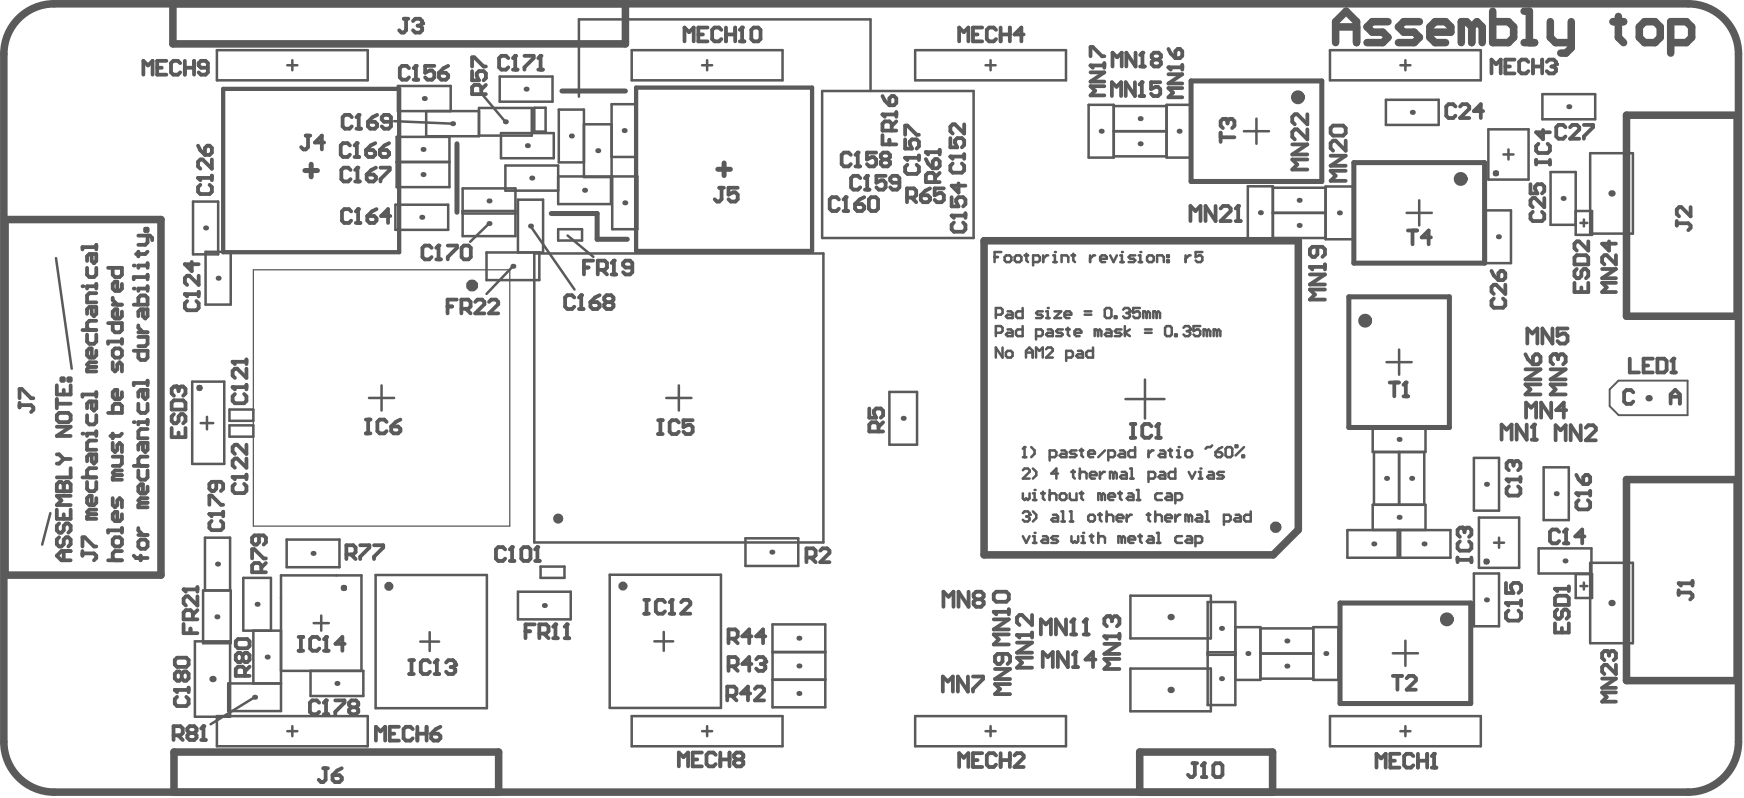

Assembly top
J3
MECH9
MECH10
MECH4
MECH3
C156
R57
C171
C169
C166
C167
C164
J4
C126
C124
C170
FR22
FR19
C168
J5
C158
C159
C160
FR16
C157
R61
R65
C154
C152
MN17
MN18
MN15
MN16
T3
MN22
C24
C27
IC4
C25
MN20
MN21
T4
C26
MN19
ESD2
MN24
J2
Footprint revision: r5
Pad size = 0.35mm
Pad paste mask = 0.35mm
No AM2 pad
IC1
1) paste/pad ratio ~60%
2) 4 thermal pad vias
without metal cap
3) all other thermal pad
vias with metal cap
J7
ASSEMBLY NOTE:
J7 mechanical mechanical
holes must be soldered
for mechanical durability.
ESD3
C121
C122
IC6
IC5
R5
T1
MN5
MN6
MN3
MN4
MN1
MN2
LED1
C • A
C179
R79
R77
C101
R2
C13
C16
C14
IC3
C15
ESD1
J1
MN23
FR21
R80
IC14
IC13
IC12
FR11
R44
R43
R42
MN8
MN10
MN12
MN11
MN13
MN9
MN14
MN7
T2
C180
C178
R81
MECH6
MECH8
MECH2
MECH1
J6
J10