

GENERAL NOTES UNLESS OTHERWISE NOTED:

1. REFERENCE 1U_minusX.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050 MM MAX
3. MATERIAL: ALUMINUM 6061-T6
4. ANODIZATION: TYPE II, BLACK
5. ALL RADII TO ± 0.5 MM UNLESS OTHERWISE SPECIFIED
6. OVERALL PROFILE TOLERANCE ⌓ | 0.1 | A | B | C | TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
7. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM
8. MACHINE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	INITIALS
	A	INITIAL RELEASE	7/13/2020	EG
	B	SHRUNK INTERIOR FILLETS	7/23/2020	EG
	C	INCREASED SPRING PIN TAP DEPTH BY 2MM	9/9/2020	EG
	D	ADDED BACKPLANE DEBUG CUTOUT	10/25/2020	EG
	E	CREATED ANODIZATION DRAWING	12/20/2020	EG
	F	UPDATED TO MATCH ASME Y14.5	9/26/2021	ML

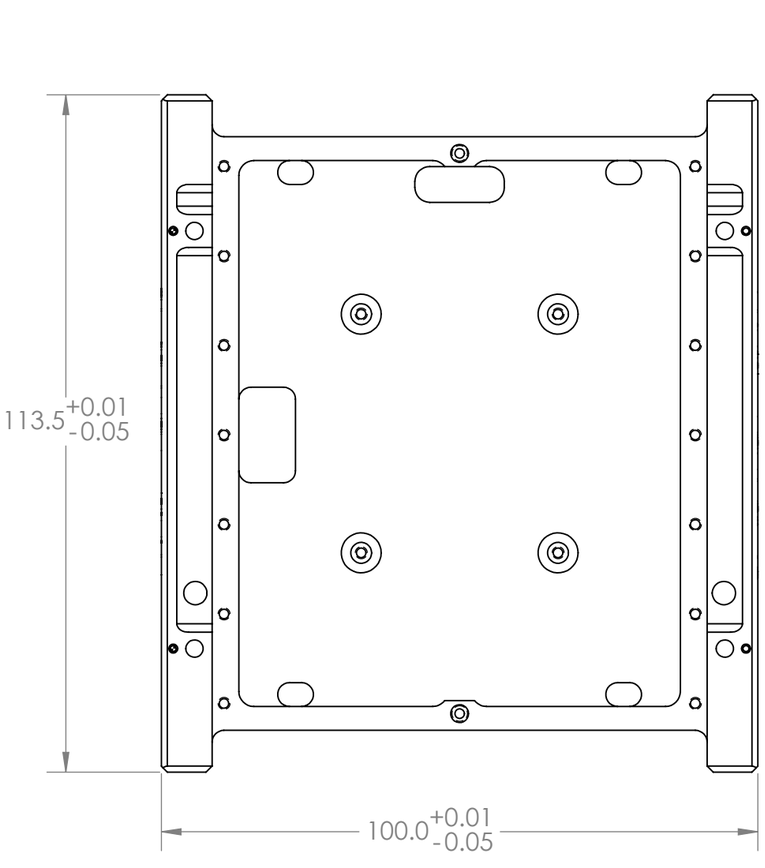

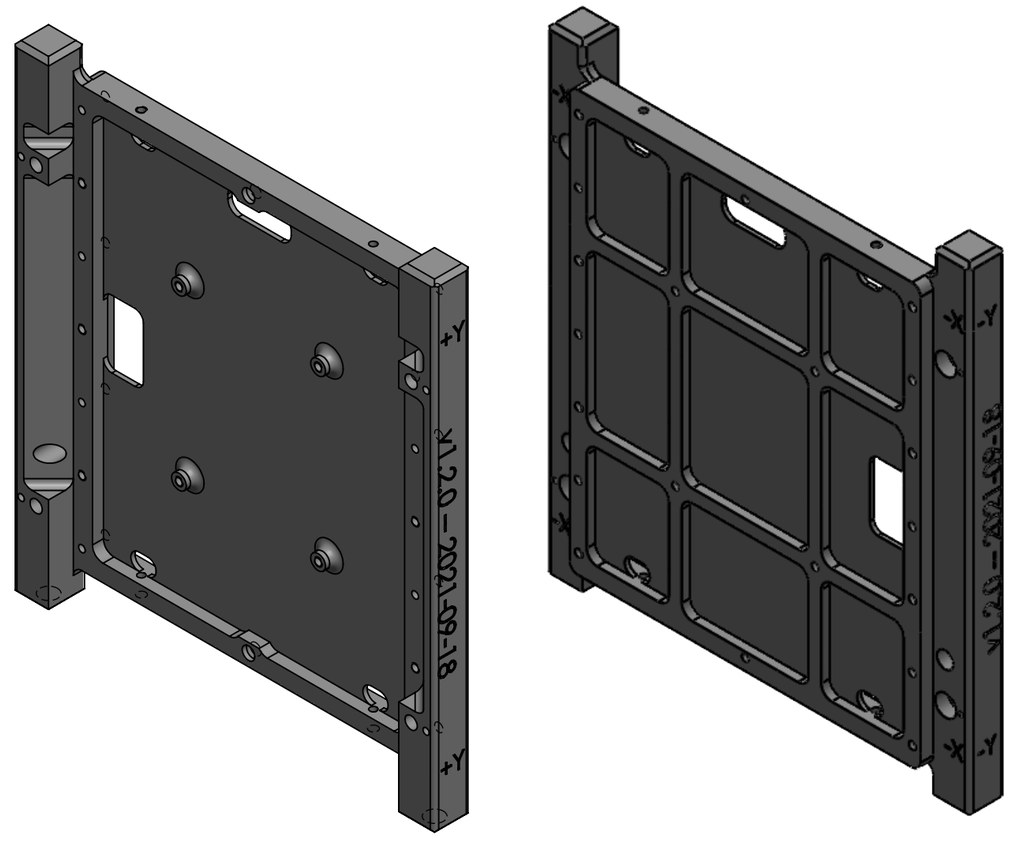

UNLESS OTHERWISE SPECIFIED	DRAWN BY	MARVIN LIN	9/26/2021			
DECIMAL: .X ± 0.1, .XX ± 0.01, .XXX ± 0.005 — ANGULAR: .X ± 0.1, .XX ± 0.01	CHECKED	HAYDEN REINHOLD	9/26/2021			
SURFACE ROUGHNESS: INTERPRET PER ASME Y14.5-2009	ENG APPR.					
DO NOT SCALE DRAWING	MFG APPR.					
MATERIAL (SEE NOTES)	-X 1U Frame			DWG. NO. 1U_minusX		
FINISH (SEE NOTES)	UNITS: MM	REVISION: F	FORMAT: B	SCALE: 1:1	PAGE: 1/3	
WEIGHT (REF)						

SOLIDWORKS Educational Product. For Instructional Use Only.