

GENERAL NOTES UNLESS OTHERWISE NOTED:


1. REFERENCE 3U_minusX.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050 MM MAX
3. OVERALL PROFILE TOLERANCE ⌓ | 0.1 | A | B | C | TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
4. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM
5. MACHINE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

REVISIONS				
REV.	DESCRIPTION	DATE	DRAWN BY	APPROVED BY
A	INITIAL COMMIT	7/07/2021	MARVIN LIN	ANDREW G.
B	REVISED FOR CLARITY AND TO MEET ASME Y14.5	7/26/2021	MARVIN LIN	ANDREW G.
C	FURTHER REVISED FOR CLARITY AND INHIBIT CHANGES	8/15/2021	MARVIN LIN	ANDREW G.
D	ADDED ANODIZATION NTOES	9/18/2021	MARVIN LIN	ANDREW G.
E	FIXED DRAWING ERRORS	9/26/2021	MARVIN LIN	ANDREW G.
F	REVISED DRAWINGS FOR CLARITY	10/16/2021	MARVIN LIN	ANDREW G.



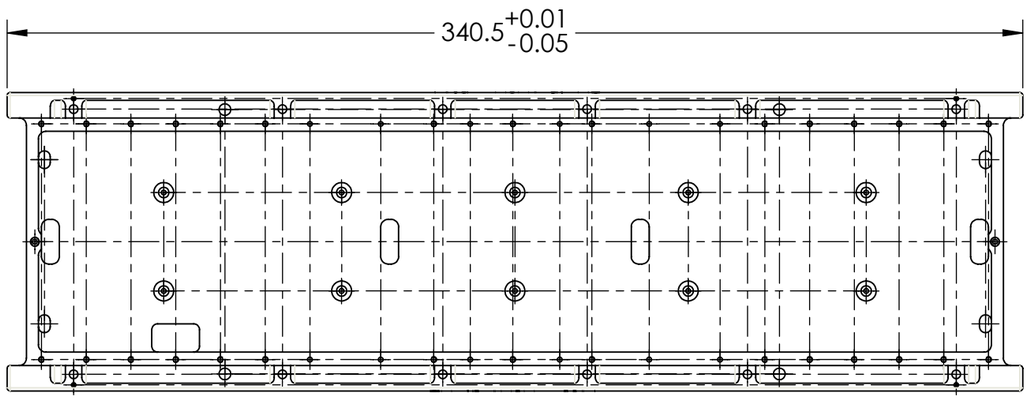



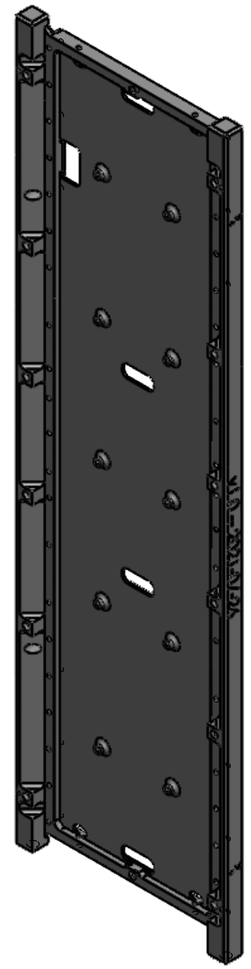

ANODIZATION: BLACK TYPE II	UNLESS OTHERWISE SPECIFIED	DRAWN BY	MARVIN LIN	10/16/2021		
MATERIAL: 6061-T6 ALUMINUM	DECIMAL: .X ± 0.1, .XX ± 0.01, .XXX ± 0.005 — ANGULAR: .X ± 0.1, .XX ± 0.01	CHECKED	SCOTT JOHNSTON	10/16/2021		
FINISH: 125	INTERPRET PER ASME Y14.5-2018	ENG APPR.				
WEIGHT: 247.65 grams	DO NOT SCALE DRAWING	MFG APPR.				
		-X 3U Frame			DWG. NO. 3U_minusX	
		UNITS: MM	REVISION: F	FORMAT: B	SCALE: 1:2	PAGE: 1/4

SOLIDWORKS Educational Product. For Instructional Use Only.