
NOTES (UNLESS OTHERWISE SPECIFIED):
1. INTERPRET DIMENSIONS PER ASME Y14.5M-1994.
2. ALL DIMENSION, UNLESS OTHERWISE NOTED,
   ARE CRITICAL DIMENSIONS AND SHALL BE CHECKED FOR CONFORMITY DURING FIRST ARTICLE INSPETION.
   Ⓟ PROCESS CONTROL DIMENSION: THESE DIMENSIONS SHALL BE STATISTICALLY MONITORED BY SUPPLIER.
   ☐ CRITICAL CONTROL: THESE DIMENSIONS SHALL BE MONITORED AS SPECIFIED IN THE SUPPLIER QUALITY PLAN
3. ALL DIMENSIONS SHOWN SHALL BE CHECKED DURING FIRST ARTICLE INSPECTION.
   FAI MUST BE APPROVED FOR THE SPECIFIC REVISION OF THIS PART PRIOR TO SHIPMENT OF PARTS TO CLIENT,
   CLIENT'S OEM PARTNERS OR SUBCONTRACTORS.
4. PART SHALL CONFORM TO PROJECT COSMETIC SPEC.
5. PART SHALL BE CLEAN AND FREE FROM FOREIGN MATERIAL.
   DIRT, OIL, GREASE, OR OTHER CONTAMINANTS ARE NOT ALLOWED.
6. PARTS OR ASSEMBLY SHALL BE PACKAGED FOR SUPPLIER INTERNAL DISTRIBUTION.
7. DRAWING FOR INSPECTION PURPOSES ONLY. ACTUAL PART SHALL CONFORM TO ELECTRONIC DATABASE.
   ALL DIMENSIONS SHALL CONFORM TO TABLE SHOWN.


8. MATERIAL: Covestro FR3021 R30 Black (30% PCR) Black Resin, T2.0
   COLOR : BLACK
   FINISH:Texture #MT-11015


   MATERIAL SHALL CONTAIN 0% REGRIND.
   NOMINAL WALL THICKNESS: PER 3D DATABASE.
   DRAWING DIMENSIONS APPLY AFTER PAINTING.
   FLAMMABILITY RATING OF MATERIAL: V0
9. PART SHALL BE MANUFACTURED BY A RECOGNIZED PLASTIC MOLDER PER UL STANDARD OMMY2.
   MATERIAL TRACEABILITY SHALL CONFORM TO UL 746D.
10. ALL DRAFT ANGLES ARE PER THE 3D CAD MODEL.
11. FLASH NOT TO EXCEED 0.13MM.
12. GATE VESTIGE/PROTRUSION SHALL BE FLUSH OR RECESSED TO 0.2MM MAXIMUM.
    PARTING LINE MISMATCH NOT TO EXCEED 0.05 MM.
    EJECTOR PIN MARKS TO BE FLUSH TO RECESSED BY 0.13MM MAXIMUM).
13. SHARP CORNERS IN 3D CAD MODEL SHALL BE ROUNDED, BROKEN, OR CHAMFERED
    TO R0.20MM MAX UNLESS OTHERWISE SPECIFIED.
14. THE FOLLOWING INFORMATION SHALL BE MOLDED APPROXIMATELY WHERE SHOWN
    RAISED CHARACTERS SHALL BE A MINIMUM OF 0.050MM TALL AND 0.005MM ABOVE PART SURFACE.
    - CAVITY NUMBER
    - MATERIAL IDENTIFICATION PER ISO 11469
    - MANUFACTURED DATE CODE
    - MOLDERS NAME AND UL FACTORY ID


REV	DESCRIPTION OF CHANGE	REV BY	DATE

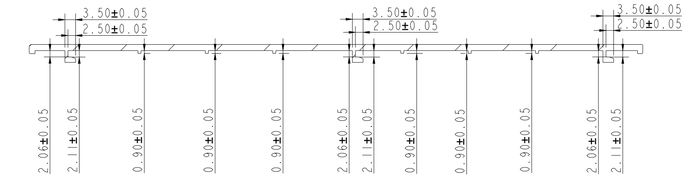


SECTION HOOK_R-HOOK_R

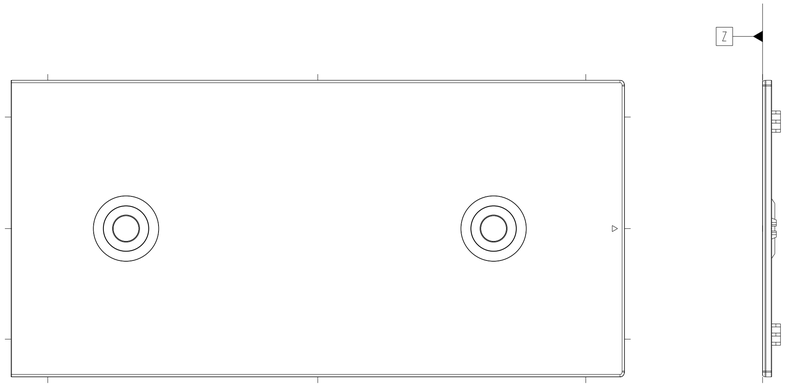

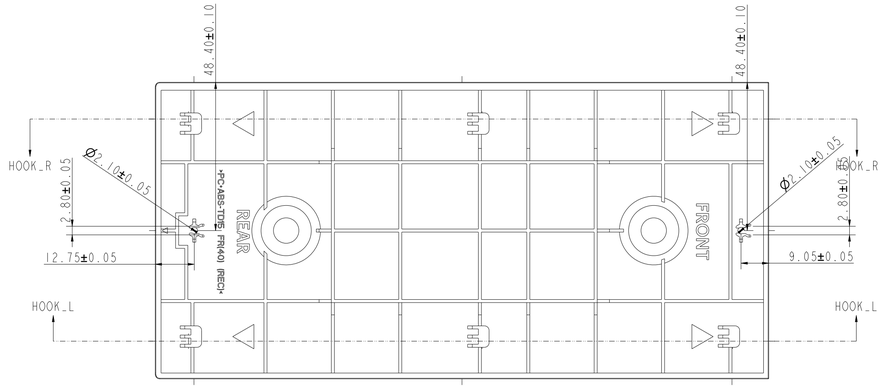

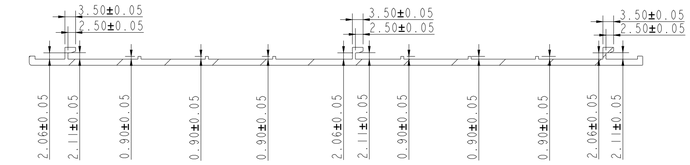



SECTION HOOK_L-HOOK_L




SCREW_STOP_4-SCREW_STOP_4

SCREW_STOP_3-SCREW_STOP_3

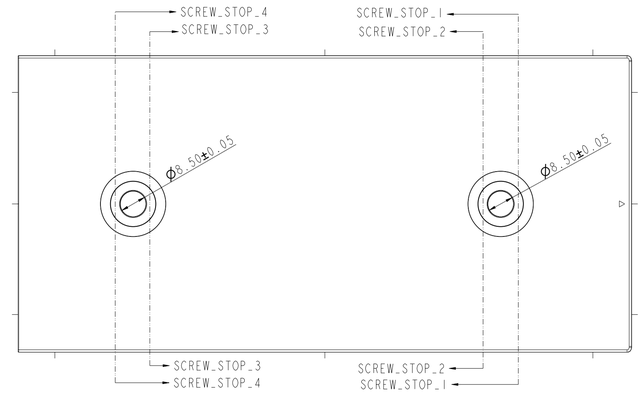



SCREW_STOP_2-SCREW_STOP_2



SCREW_STOP_1-SCREW_STOP_1

UNLESS SPECIFIED TOLERANCE ARE:	framework		
300 ABOVE : ± 0.20	FRAMEWORK DESKTOP	DESIGNED BY	DRAWN BY
300 ≥ X ≥ 150 : ± 0.15		CHECKED BY	APPROVED BY
150 > X ≥ 50 : ± 0.10	MODEL	ISSUED DATE: Feb-19-25	SCALE: 1.000 / UNIT: mm
50 > X ≥ 20 : ± 0.075	THIRD ANGLE PROJECTION	DRAWING FILE NAME: TOP COVER	
20mm BELOW : ± 0.05		SIZE: A1 / SHEET: 2 OF 2	REVISION: 0 / VERSION: 0
ANGLES : ± 1°			
FLATNESS : ▱ 0.20			
CONCENTRICITY : ± 0.05			