Profile of cross section line C-C, showing countersink hole and back mill




Profile of cross section line B-B, showing 30 degree chamfer from top and 1mm back-mill



Chamfer 30 degree ⁄ 0.5mm from top side

Note: 6x countersink hole 45 degree, see section C-C

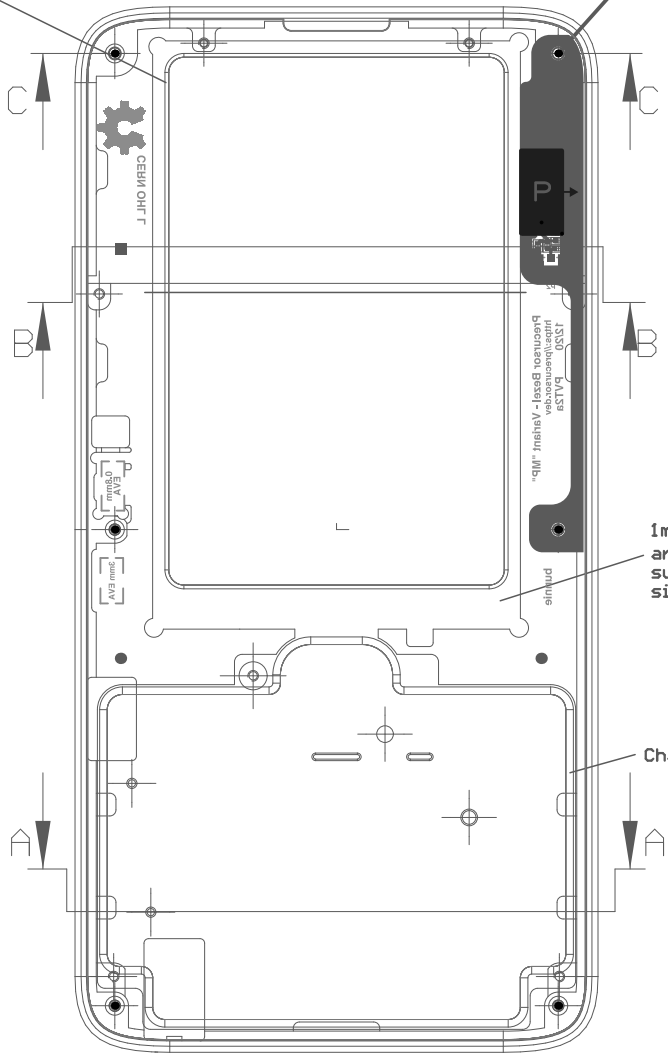


Layer	Name	Material	Thickness	Constant	Board Layer Stack
1	Top Layer		0.036mm		
	Light blocking FR-4	FR-4	1.500mm	4.8	
2	Bottom Layer		0.036mm		
	Bottom Solder	Solder Resist	0.010mm	3.5	
	Bottom Overlay				

Finish: immersion gold

Top side no solder mask or silkscreen

Bottom side clear soldermask, light gray silkscreen

Please see .GM1 and .GM2 for chamfer and step-milling instructions



Profile of cross section line A-A, showing 15 degree chamfer from top + 1mm back-mill