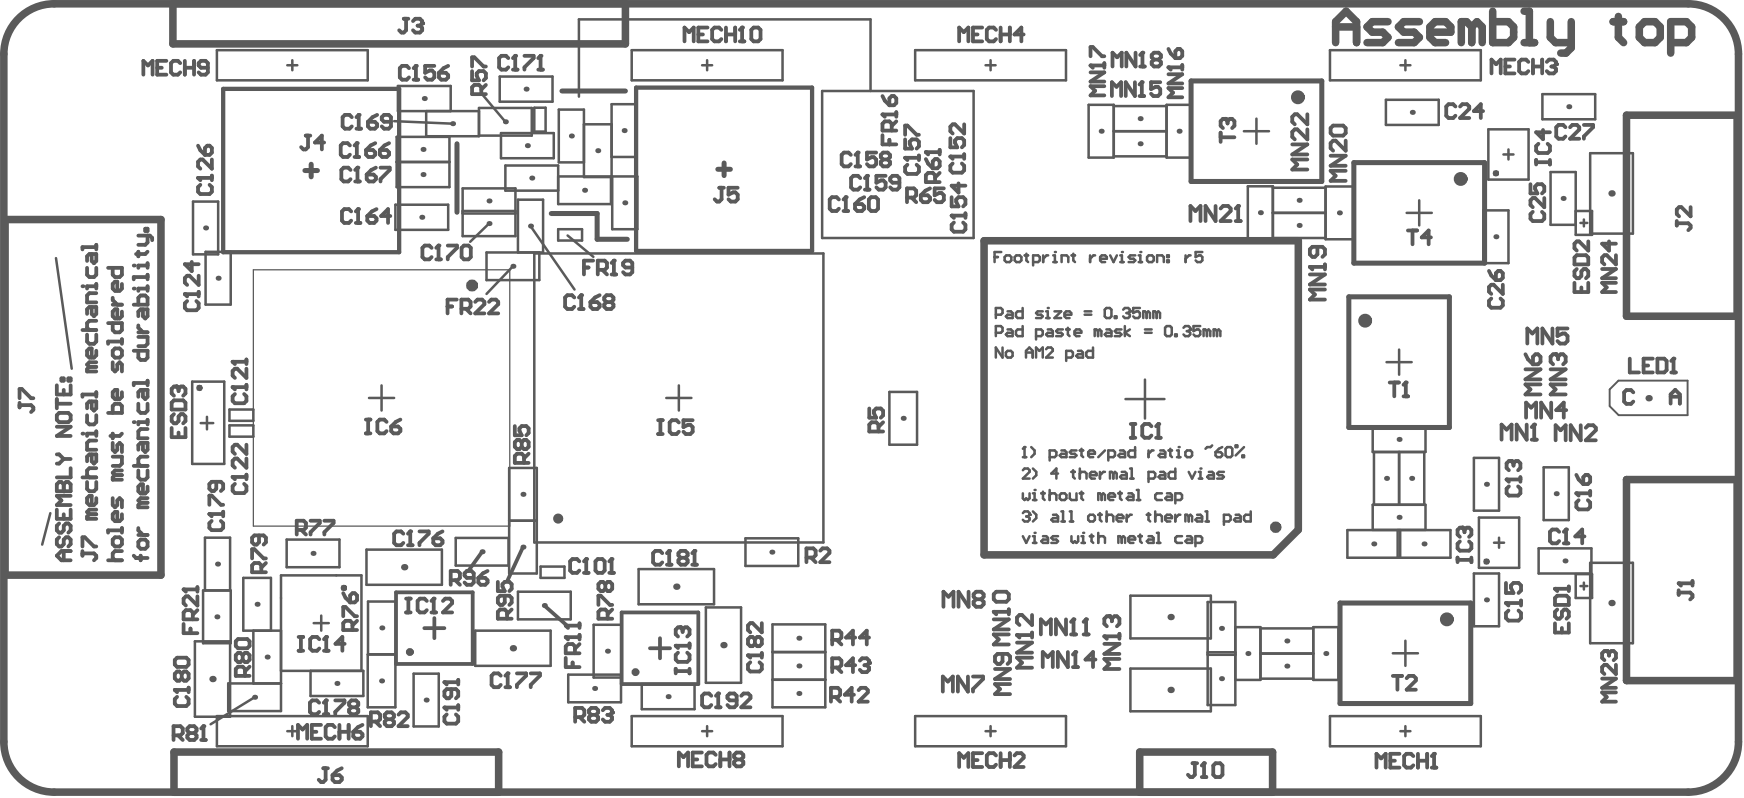

Assembly top
J3
MECH9
MECH10
MECH4
MECH3
C156
R57
C171
C169
C166
C167
C164
J4
C126
C170
FR19
FR22
C168
C124
J5
C158
C159
C160
FR16
C157
R61
R65
C154
C152
MN17
MN18
MN15
MN16
T3
MN22
C24
C27
IC4
C25
MN20
MN21
T4
C26
MN19
ESD2
MN24
J2
Footprint revision: r5
Pad size = 0.35mm
Pad paste mask = 0.35mm
No AM2 pad
IC1
1) paste/pad ratio ~60%
2) 4 thermal pad vias
without metal cap
3) all other thermal pad
vias with metal cap
J7
ASSEMBLY NOTE:
J7 mechanical mechanical
holes must be soldered
for mechanical durability.
ESD3
C121
C122
IC6
IC5
R85
R5
T1
MN5
MN6
MN3
MN4
MN1
MN2
LED1
C • A
C179
R77
C176
R96
C101
C181
R2
R95
R78
FR11
IC13
C182
R44
R43
R42
C192
C13
C16
C14
IC3
C15
ESD1
J1
MN23
FR21
R79
R76
IC14
IC12
C177
C180
R80
C178
R82
C191
R81
+MECH6
R83
MECH8
MN8
MN9
MN10
MN12
MN11
MN14
MN13
MN7
T2
MECH2
MECH1
J6
J10