


GENERAL NOTES UNLESS OTHERWISE NOTED:


1. REFERENCE 1.5U_minusX.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050MM MAX
3. ANODIZATION: TYPE II, BLACK
4. OVERALL PROFILE TOLERANCE ⌓ 0.1 | A | B | C TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
5. MACHINE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

REVISIONS				
REV.	DESCRIPTION	DATE	DRAWN BY	APPROVED BY
A	INITIAL COMMIT	10/11/2021	JACK PORTER	ANDREW GREENBERG
B	REVISED DRAWINGS FOR CLARITY	12/19/2021	JACK PORTER	ANDREW GREENBERG



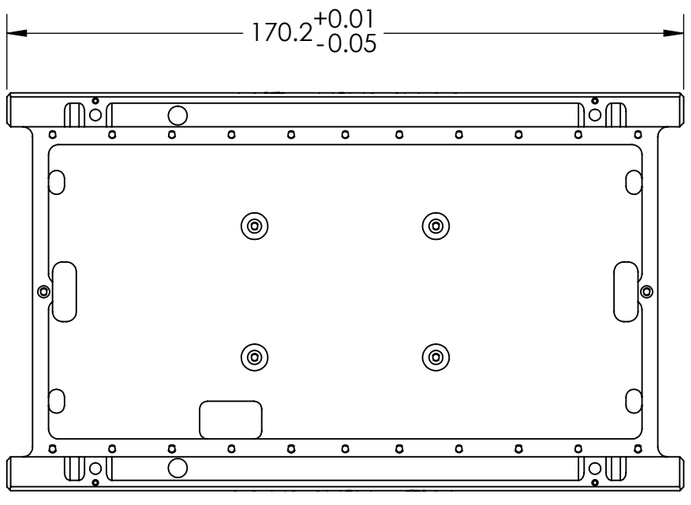

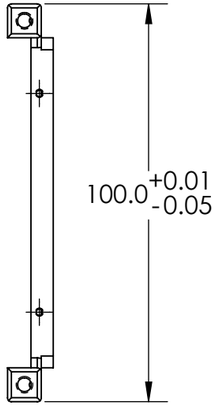

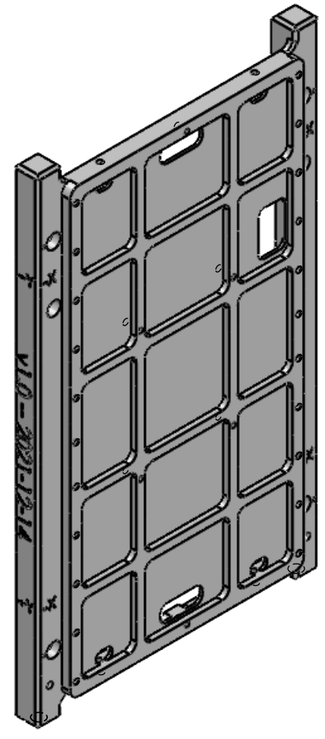

ANNODIZATION	BLACK TYPE II	UNLESS OTHERWISE SPECIFIED	
MATERIAL	6061-T6 ALUMINUM	DECIMAL: .X ± 0.1, .XX ± 0.01, .XXX ± 0.005	ANGULAR: .X ± 0.1, .XX ± 0.01
FINISH	125	SURFACE ROUGHNESS: INTERPRET PER ASME Y14.5-2009	
WEIGHT	118.80 g	DO NOT SCALE DRAWING	

DRAWN BY	JACK PORTER	2/21/2022	PSAS
CHECKED	HAYDEN REINHOLD	2/21/2022	
ENG APPR.			
MFG APPR.			
-X 1.5U Frame		DWG. NO.	1.5U_minusX

UNITS	REVISION	FORMAT	SCALE	PAGE
MM	A	B	1:1.5	1/4

SOLIDWORKS Educational Product. For Instructional Use Only.