



GENERAL NOTES UNLESS OTHERWISE NOTED:

1. REFERENCE 2U_minusX.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050 MM MAX
3. OVERALL PROFILE TOLERANCE ⌓ | 0.1 | A | B | C TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
4. ALL HOLES AND SLOTS ⌖ | ∅ 0.05 Ⓜ | A | BⓂ | CⓂ UNLESS OTHERWISE SPECIFIED
5. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM
6. ENGRAVE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

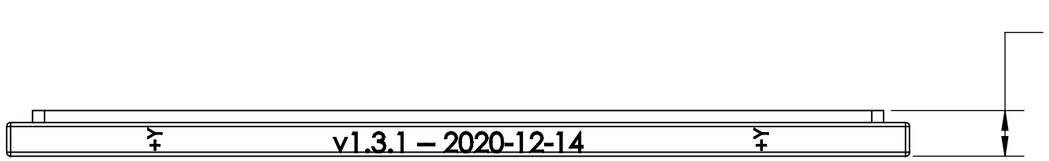

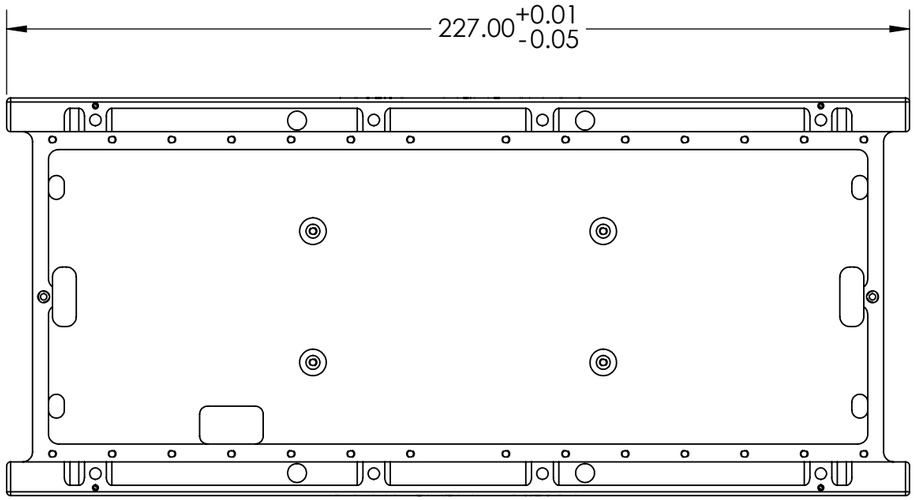

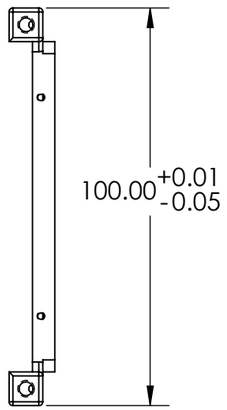

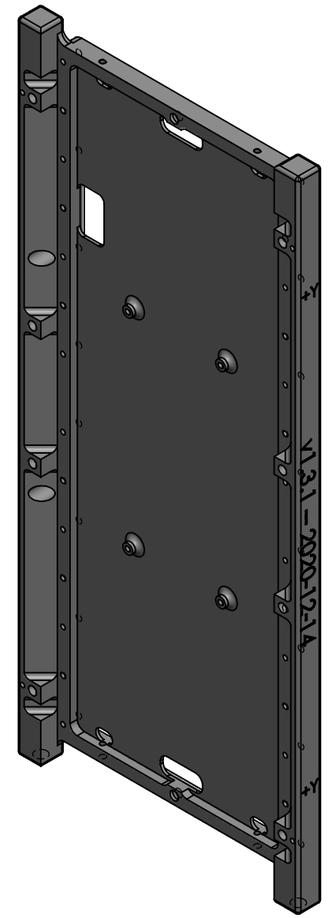

ANODIZATION	UNLESS OTHERWISE SPECIFIED	DRAWN BY	Hayden Reinhold	1/3/2022	
BLACK TYPE II	DECIMAL .X ± 0.1 .XX ± 0.01 .XXX ± 0.005 / ANGULAR .X ± 0.1 .XX ± 0.01	CHECKED		1/3/2022	
MATERIAL **6061-T6 ALUMINUM**		ENG APPR.			
FINISH 125	SURFACE ROUGHNESS: INTERPRET PER ASME Y14.5-2009	MFG APPR.			
WEIGHT **163.11g**	DO NOT SCALE DRAWING	-X 2U Frame		DWG. NO. **2U_minusX**	
		UNITS **MM**	REVISION **A**	FORMAT **B**	SCALE **1:1.5** PAGE **1/4**

SOLIDWORKS Educational Product. For Instructional Use Only.