



GENERAL NOTES UNLESS OTHERWISE NOTED:

1. REFERENCE 2U_plusX.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050MM MAX
3. OVERALL PROFILE TOLERANCE ⌓ | 0.1 | A | B | C TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
4. ALL HOLES ⌖ | ∅ 0.05 Ⓜ | A | B Ⓜ | C Ⓜ UNLESS OTHERWISE SPECIFIED
5. ENGRAVE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

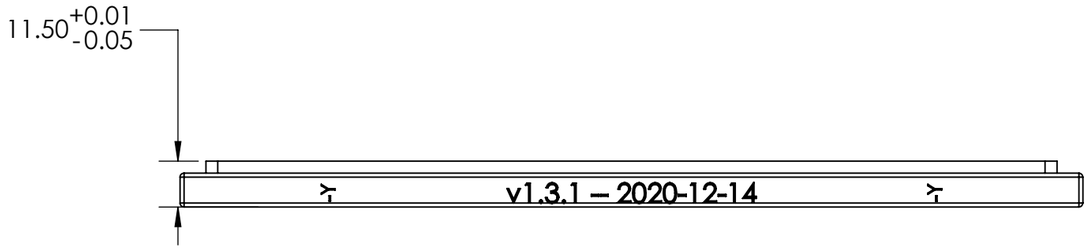

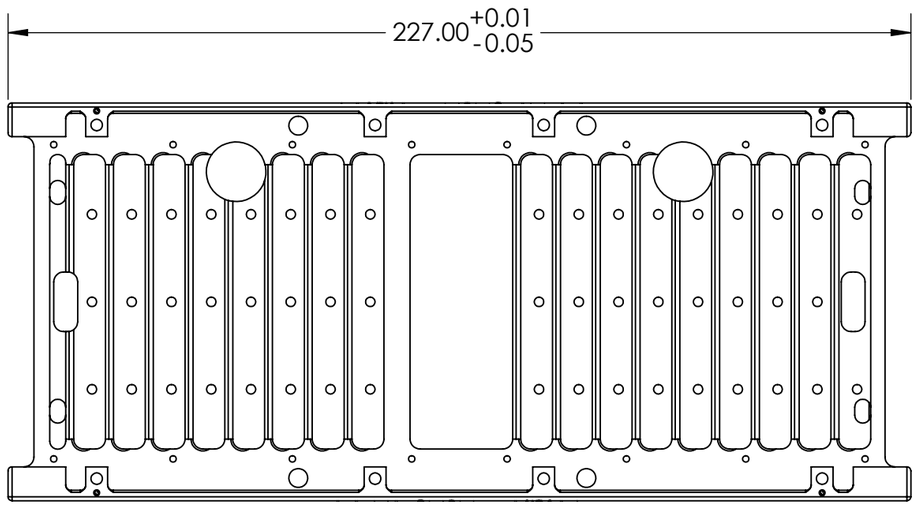

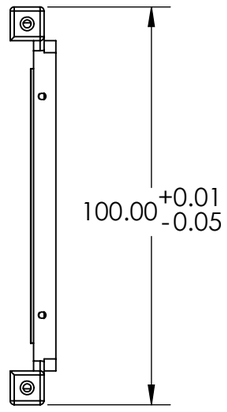

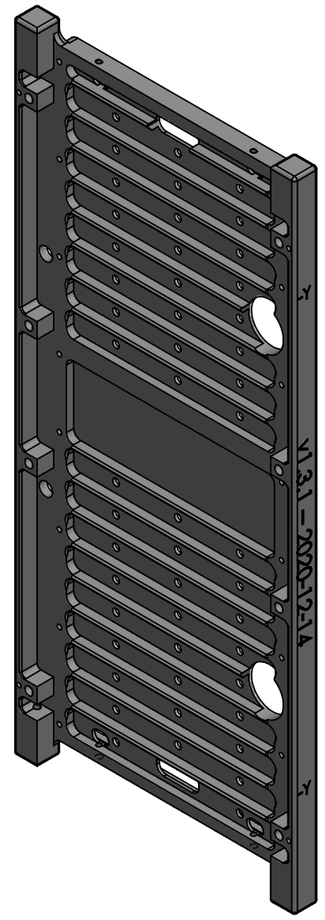

ANODIZATION	**BLACK TYPE II**	UNLESS OTHERWISE SPECIFIED	DRAWN BY: Hayden Reinhold 1/3/2022
MATERIAL	**6061-T6 ALUMINUM**	DECIMAL .X ± 0.1 .XX ± 0.01 .XXX ± 0.005 ANGULAR .X ± 0.1 .XX ± 0.01	CHECKED 1/3/2022
FINISH	125	SURFACE ROUGHNESS: INTERPRET PER ASME Y14.5-2009	ENG APPR.
WEIGHT	**168.42g**	DO NOT SCALE DRAWING	MFG APPR.

+X 2U Frame — DWG. NO. **2U_plusX**

UNITS	REVISION	FORMAT	SCALE	PAGE
MM	**E**	**B**	**1:1.5**	**1/4**

SOLIDWORKS Educational Product. For Instructional Use Only.