


GENERAL NOTES UNLESS OTHERWISE NOTED:


1. REFERENCE 3U_plusX.STEP FOR MODEL BASE DEF
2. REMOVE ALL BURRS AND SHARP EDGES R0.050 MM MAX
3. OVERALL PROFILE TOLERANCE ⌓ | 0.1 | A | B | C | TO A MINIMUM GRID OF 5MM UNLESS OTHERWISE SPECIFIED
4. INTERNAL CORNERS RADIUS IS 0.2MM MAXIMUM
5. MACHINE ALL TEXT WITH 90 DEG V BIT WITH DEPTH OF 0.2MM BEFORE ANODIZATION

REVISIONS				
REV.	DESCRIPTION	DATE	DRAWN BY	APPROVED BY
A	INITIAL COMMIT	7/07/2021	MARVIN LIN	ANDREW G.
B	REVISED FOR CLARITY AND TO MEET ASME Y14.5	7/27/2021	MARVIN LIN	ANDREW G.
C	FURTHER REVISED FOR CLARITY AND INHIBIT CHANGES	8/15/2021	MARVIN LIN	ANDREW G.
D	ADDED ANODIZATION NOTES	9/18/2021	MARVIN LIN	ANDREW G.
E	FIXED DRAWING ERRORS	9/26/2021	MARVIN LIN	ANDREW G.
F	REVISED DRAWINGS FOR CLARITY	10/16/2021	MARVIN LIN	ANDREW G.

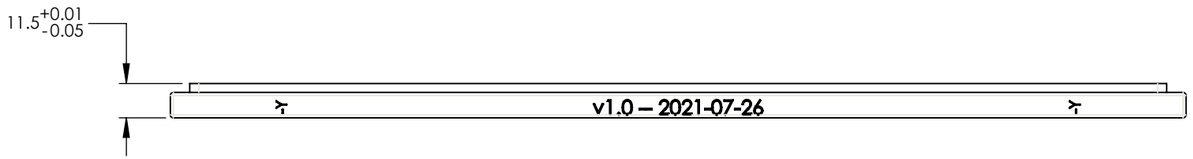

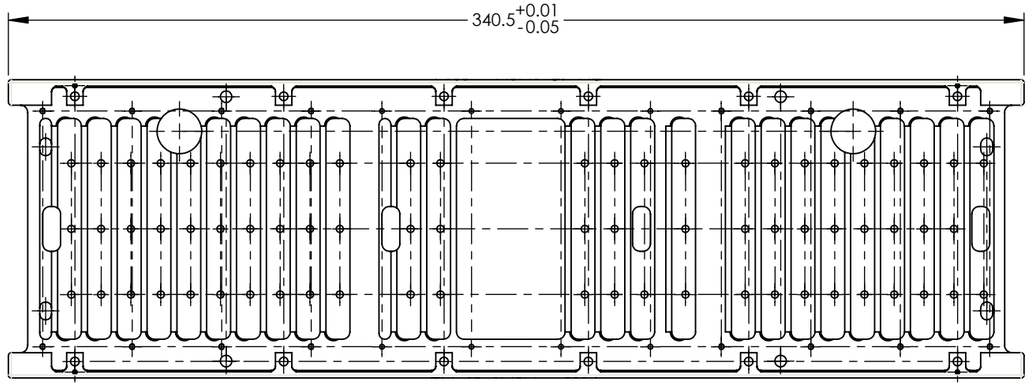



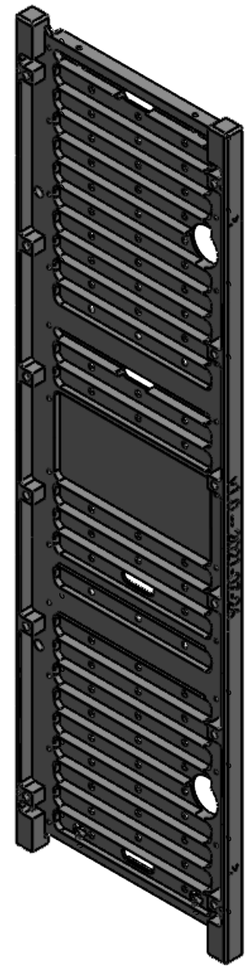

ANODIZATION: **BLACK TYPE II**	UNLESS OTHERWISE SPECIFIED	DRAWN BY	MARVIN LIN	10/16/2021			
MATERIAL: **6061-T6 ALUMINUM**	DECIMAL: .X ± 0.1, .XX ± 0.01, .XXX ± 0.005 — ANGULAR: .X ± 0.1, .XX ± 0.01	CHECKED	SCOTT JOHNSTON	10/16/2021	PSAS		
FINISH: **125**	INTERPRET PER ASME Y14.5-2018	ENG APPR.					
WEIGHT: **251.97 grams**	DO NOT SCALE DRAWING	MFG APPR.			**+X 3U Frame**	DWG. NO. **3U_plusX**	
		UNITS: **MM**	REVISION: **F**	FORMAT: **B**	SCALE: **1:2**	PAGE: **1/4**	

SOLIDWORKS Educational Product. For Instructional Use Only.